


# Pigseye Beetle Salvage Sale Area & Slash Disposal Map Divide Ranger District, Rio Grande National Forest

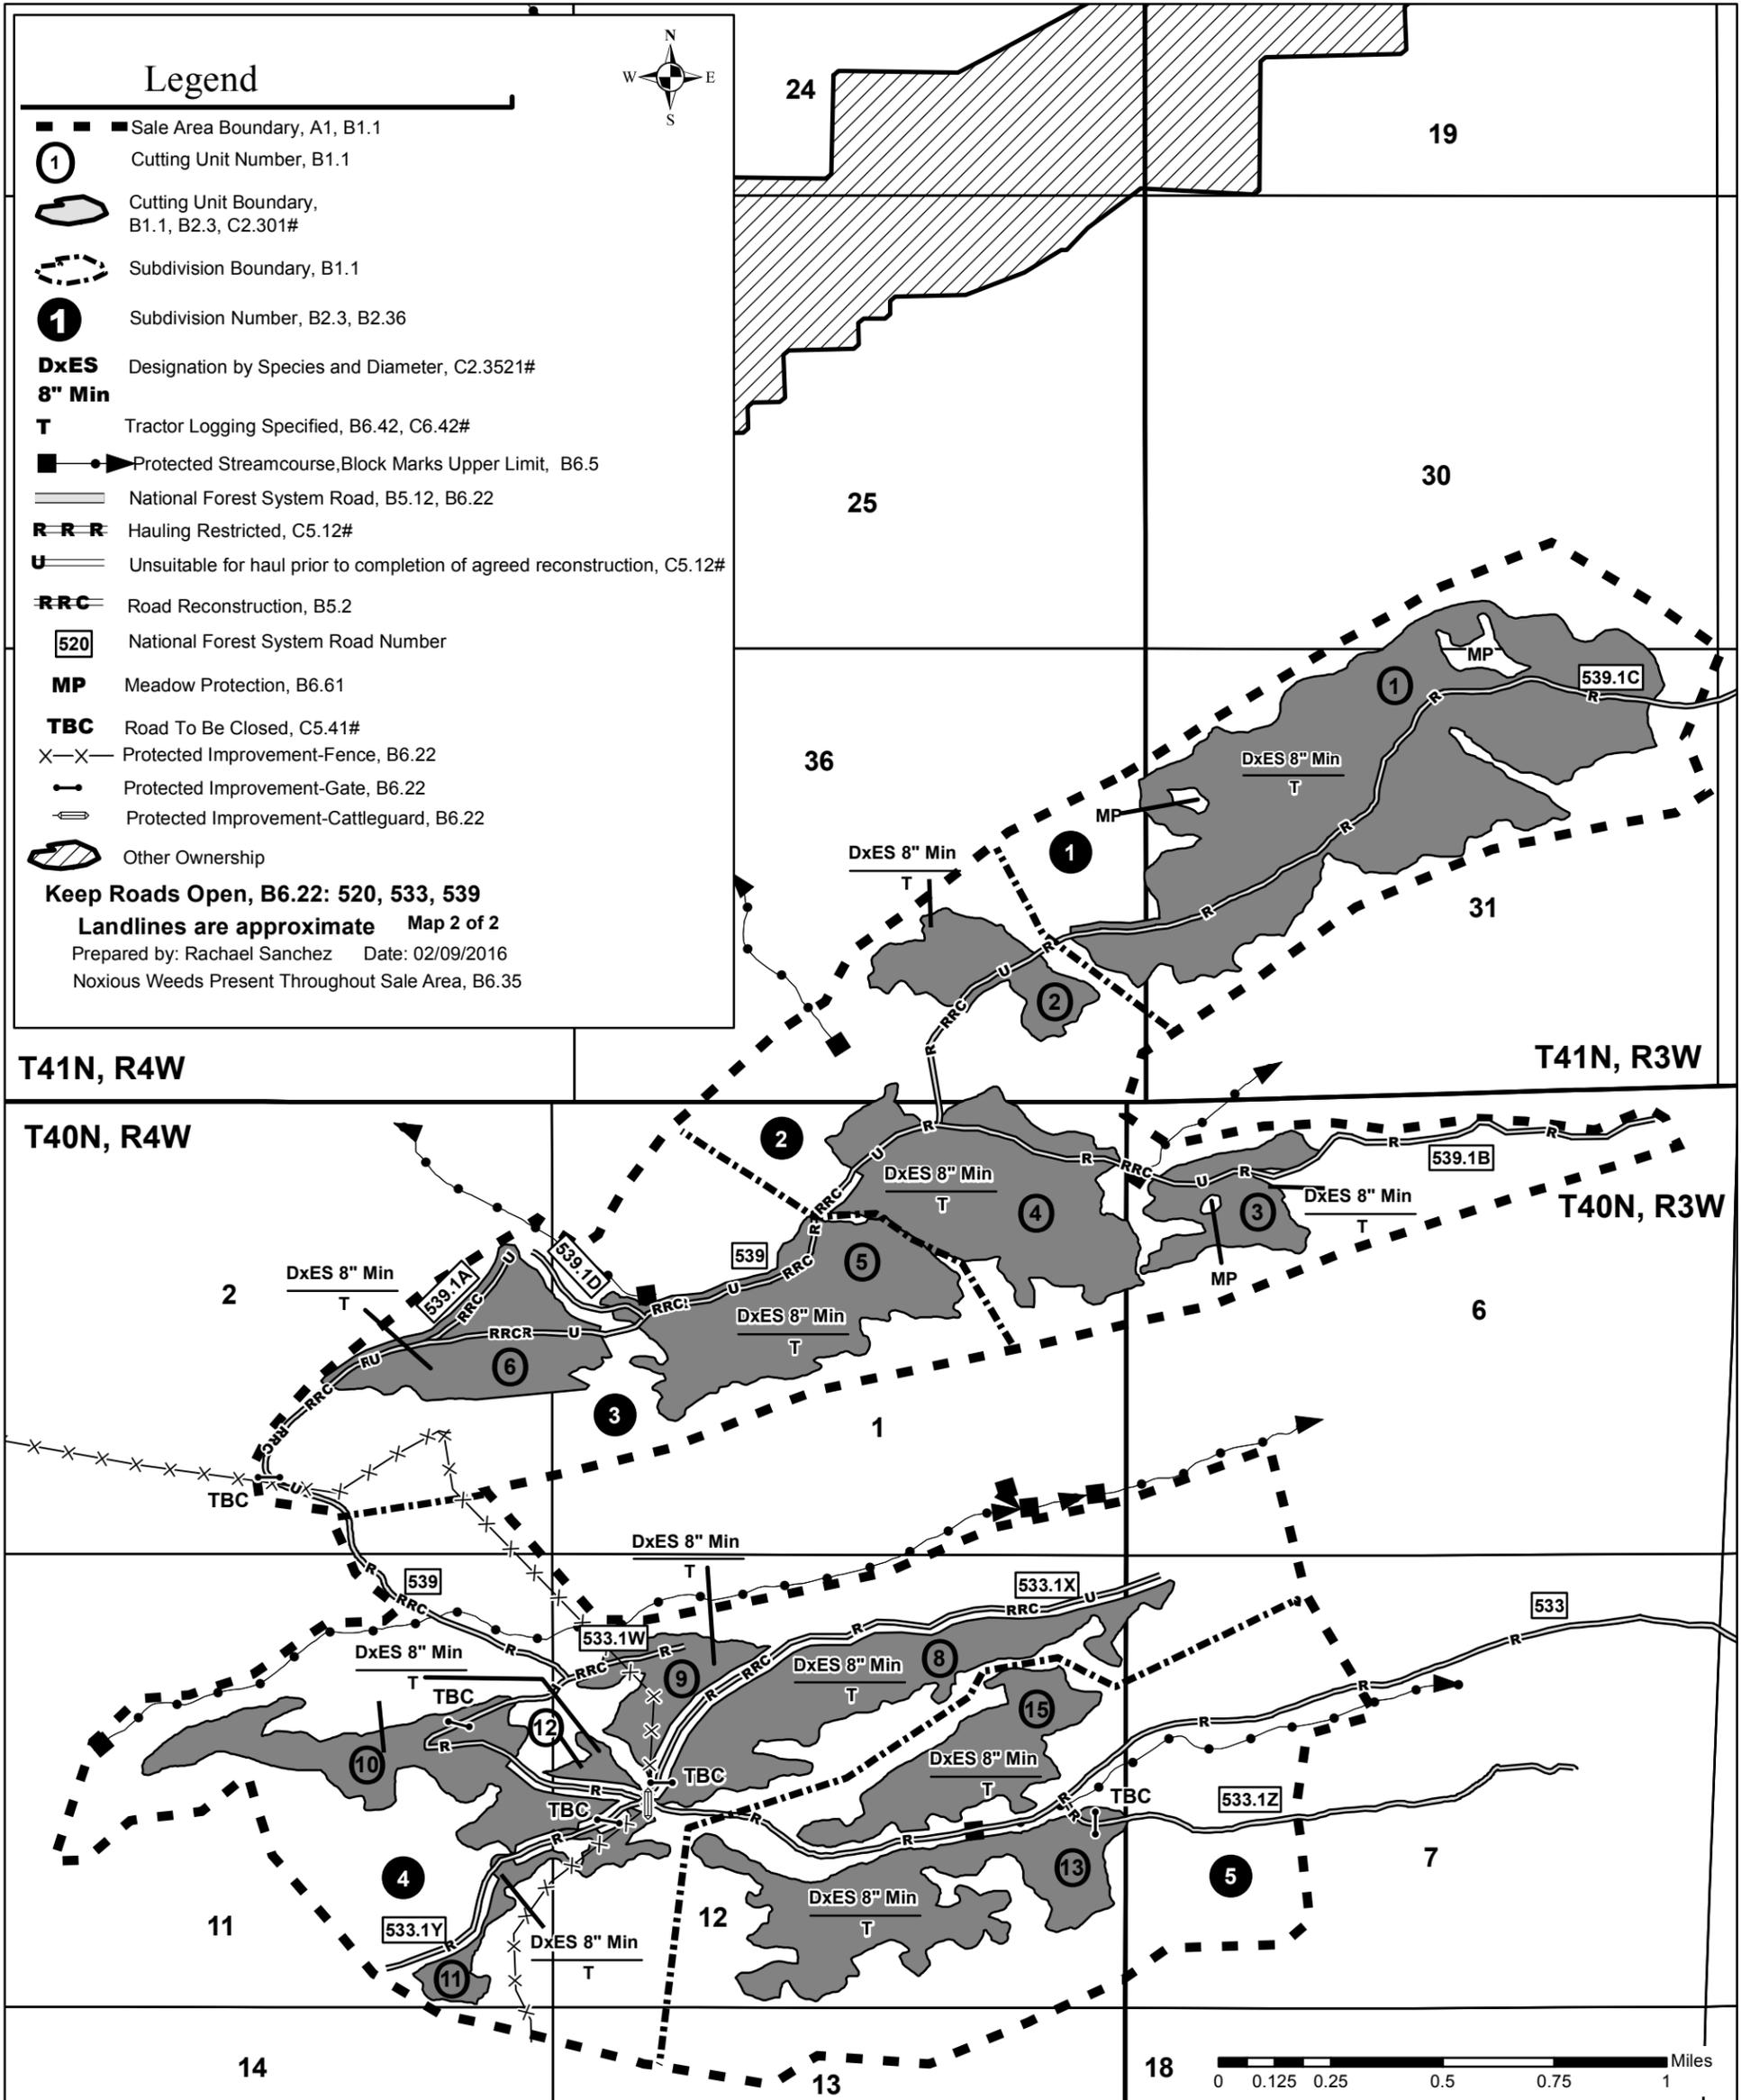

**Slash Treatment Table, C6.7#**

Residual Purchaser created slash should be evenly distributed throughout the harvest unit and lopped and scattered to a height of 2 feet or less. The materials should be well distributed throughout the stand and may be deposited on skid trails.

Any residual landing slash shall be piled for later burning by the Forest Service. Piles shall be reasonably compact and free of solids to facilitate complete burning. Piles will not be less than 6 feet in height. Piles shall be of size and location, which will not impair road use or result in damage to residual timber. Piles shall be located at least 30 feet from residual timber.

Purchaser shall fell all species greater than or equal to 3 feet in height not meeting minimum diameter specifications for included timber that are damage beyond recovery by the Purchaser's Operations. Damaged beyond recovery is defined as (1) has the top broken out, (2) leans more than 10 degrees, (3) has less than half of its original limbs or (4) has its bark removed from at least half of the circumference of the bole. Such trees shall be limbed to a stem diameter of approximately 3 inches and treated with other logging slash.

Where available, retain 10-15 tons per acre of coarse woody debris (defined by material greater than 3 inches diameter).

Slash piles shall be located at least 50 feet (hand piles) or 200 feet (machine piles) from perennial streams, lakes, ponds, wetlands or riparian areas.

If whole tree yarding, limbs and/or tops shall be returned to the unit if 15% or more of the unit is exposed mineral soil; this material shall be distributed in areas primarily comprised of bare mineral soil.