



**FRONT ELEVATION**

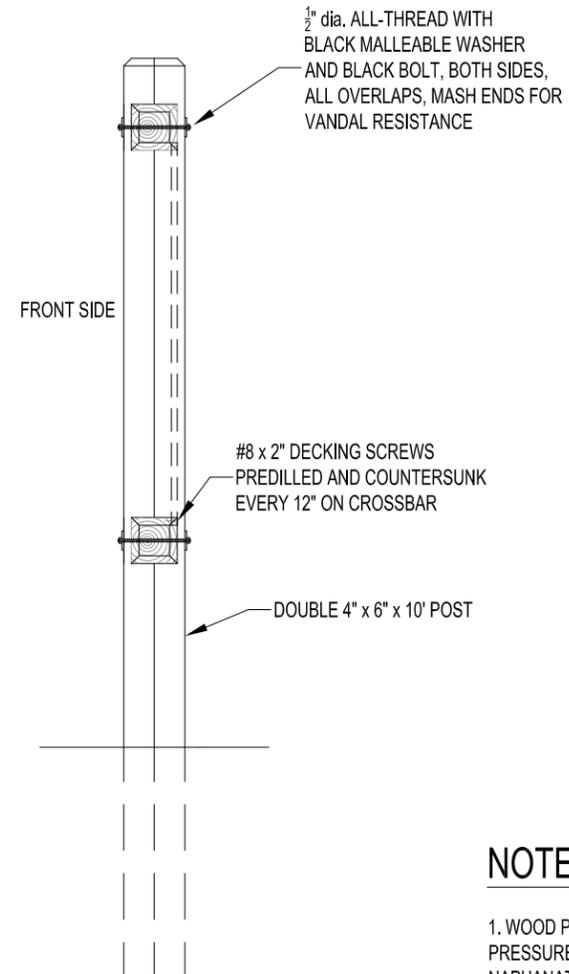


**SIDE ELEVATION**

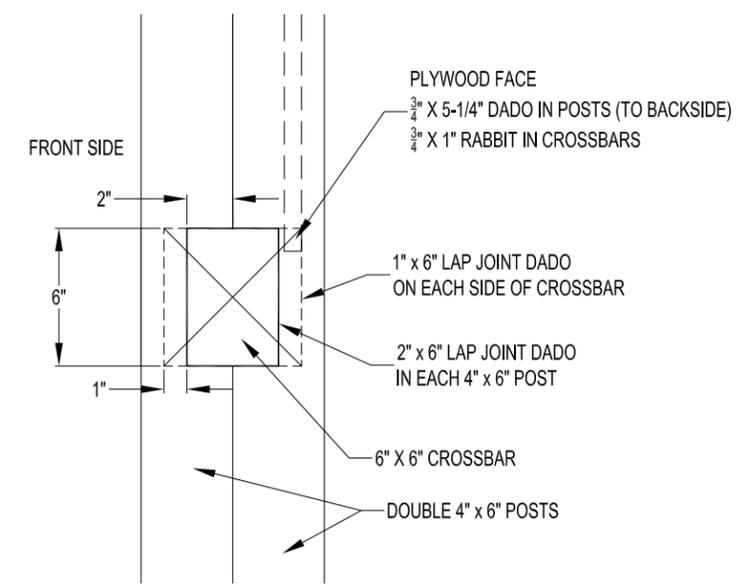

**SECTION A-A  
POST/CROSSBAR LAP  
JOINT DETAILS**

**NOTES**

1. WOOD POSTS AND CROSSBARS SHALL BE NO.1 DOUGLAS FIR UNLESS OTHERWISE NOTED, AND SHALL BE PRESSURE TREATED FOR GROUND EXPOSURE WITH A DARK BROWN PRESERVATIVE COLOR SUCH AS COPPER NAPHANATE OR APPROVED EQUAL.
2. ALL FASTNERS SHALL BE CORROSION RESISTANT FOR EXTERIOR USE, UNLESS OTHERWISE SPECIFIED.
3. WHEN SPECIFIED, ALL SOLID WOOD SURFACES SHALL BE PAINTED WITH TWO COATS OF DARK BROWN, EXTERIOR, OIL BASE PAINT. FINAL COLOR SHALL BE APPROVED BY THE COR.
6. WHEN SPECIFIED, PLYWOOD SHALL BE PAINTED WITH TWO COATS OF DARK BROWN SEMI-TRANSPARENT, OIL-BASED STAIN. MATCH COLOR OR TREATED POSTS AND CROSSBARS.

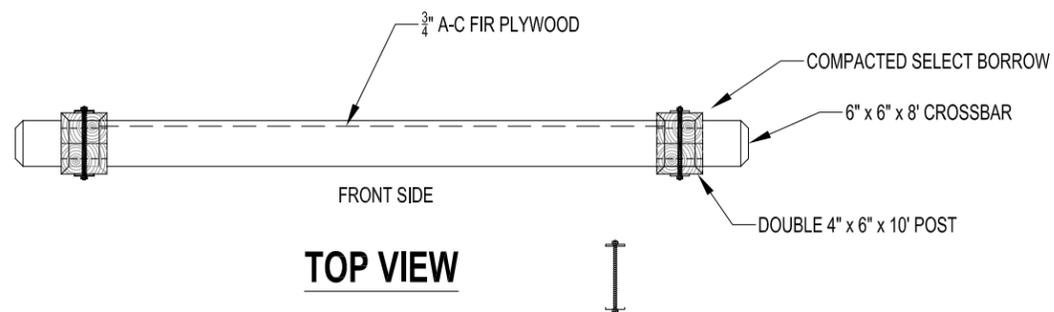

**TOP VIEW**

**BULLETIN BOARD  
TYPICAL SINGLE PANEL**



Gallatin National Forest  
All Districts

Typical Details

SHEET 1 OF 1