

**PART I - SCHEDULE OF ITEMS
SECTION B - SERVICES AND PRICES**

Page 1 of 1
Switch Timber Sale, Road 2281000
Olympic National Forest
Pacific Ranger District
Grays Harbor County, Washington

Rd. 2281000 MP 0.0 - 5.4


| ITEM NO. | DESCRIPTION | UNIT | QUAN-TITY | UNIT PRICE | TOTAL |
|----------|---|-------------|-----------|-------------|--------------|
| 15101 | Mobilization | LS | 1 | \$ 6,500.00 | \$ 6,500.00 |
| 15401 | Contractor Testing | LS | 1 | \$ 2,050.00 | \$ 2,050.00 |
| 15713 | Soil Erosion and Pollution Control | LS | 1 | \$ 1,100.00 | \$ 1,100.00 |
| 20105 | Clearing and Grubbing, Disposal of tops and limbs F, logs F, stumps F | LS | 1 | \$ 9,760.00 | \$ 9,760.00 |
| 20419 | Drainage Excavation, Type Ditchout | Foot | 20 | \$ 16.25 | \$ 325.00 |
| 20401 | Roadway Excavation, Compaction Method B, Finishing Method A | Cubic Yard | 480 | \$ 13.20 | \$ 6,336.00 |
| 25101 | Placed Riprap, Class 3 | Cubic yard | 50 | \$ 82.00 | \$ 4,100.00 |
| 30322 | Road Reconditioning, Compaction Method B | Mile | 5.4 | \$ 2,260.00 | \$ 12,204.00 |
| 32232 | Haul and Place Stockpiled Aggregate, Compaction Method B | Cubic Yard | 460 | \$ 25.00 | \$ 11,500.00 |
| 32232A | Haul and Place Stockpiled Aggregate, Compaction Method B | Cubic Yard | 380 | \$ 25.00 | \$ 9,500.00 |
| 60201 | 18 inch Pipe Culverts | Linear Feet | 156 | \$ 40.50 | \$ 6,318.00 |
| 60709 | Cleaning Culverts in Place | LS | 1 | \$ 160.00 | \$ 160.00 |
| 62530 | Seeding and Mulching, Dry Method | LS | 1 | \$ 2,120.00 | \$ 2,120.00 |
| | Rd. 2281000 | | | | \$ 71,973.00 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

PART I - SCHEDULE OF ITEMS
SECTION B - SERVICES AND PRICES

Page 1 of 1
Switch Timber Sale, Road 2281030
Olympic National Forest
Pacific Ranger District
Grays Harbor County, Washington

Rd. 2281030 MP 0.0 - 0.63


| ITEM NO. | DESCRIPTION | UNIT | QUAN-TITY | UNIT PRICE | TOTAL |
|----------|---|-------------|-----------|-------------|--------------|
| 15101 | Mobilization | LS | 1 | \$ 860.00 | \$ 860.00 |
| 15401 | Contractor Testing | LS | 1 | \$ 2,550.00 | \$ 2,550.00 |
| 15713 | Soil Erosion and Pollution Control | LS | 1 | \$ 1,790.00 | \$ 1,790.00 |
| 20105 | Clearing and Grubbing, Disposal of tops and limbs F, logs F, stumps F | LS | 1 | \$ 3,925.00 | \$ 3,925.00 |
| 20419 | Drainage Excavation, Type Ditchout | Foot | 20 | \$ 16.25 | \$ 325.00 |
| 20401 | Roadway Excavation, Compaction Method B, Finishing Method A | Cubic Yard | 85 | \$ 15.40 | \$ 1,309.00 |
| 30322 | Road Reconditioning, Compaction Method B | Mile | 0.63 | \$ 2,400.00 | \$ 1,512.00 |
| 32222 | Pit Run Aggregate, Compaction Method B | Cubic Yard | 620 | \$ 27.60 | \$ 17,112.00 |
| 32232 | Haul and Place Stockpiled Aggregate, Compaction Method B | Cubic Yard | 210 | \$ 25.00 | \$ 5,250.00 |
| 60201 | 18 inch Pipe Culverts | Linear Feet | 348 | \$ 40.50 | \$ 14,094.00 |
| 60201A | 24 inch Pipe Culverts | Linear Feet | 48 | \$ 58.50 | \$ 2,808.00 |
| 62530 | Seeding and Mulching, Dry Method | LS | 1 | \$ 1,415.00 | \$ 1,415.00 |
| | Rd. 2281030 | | | | \$ 52,950.00 |
| | | | | | |
| | | | | | |


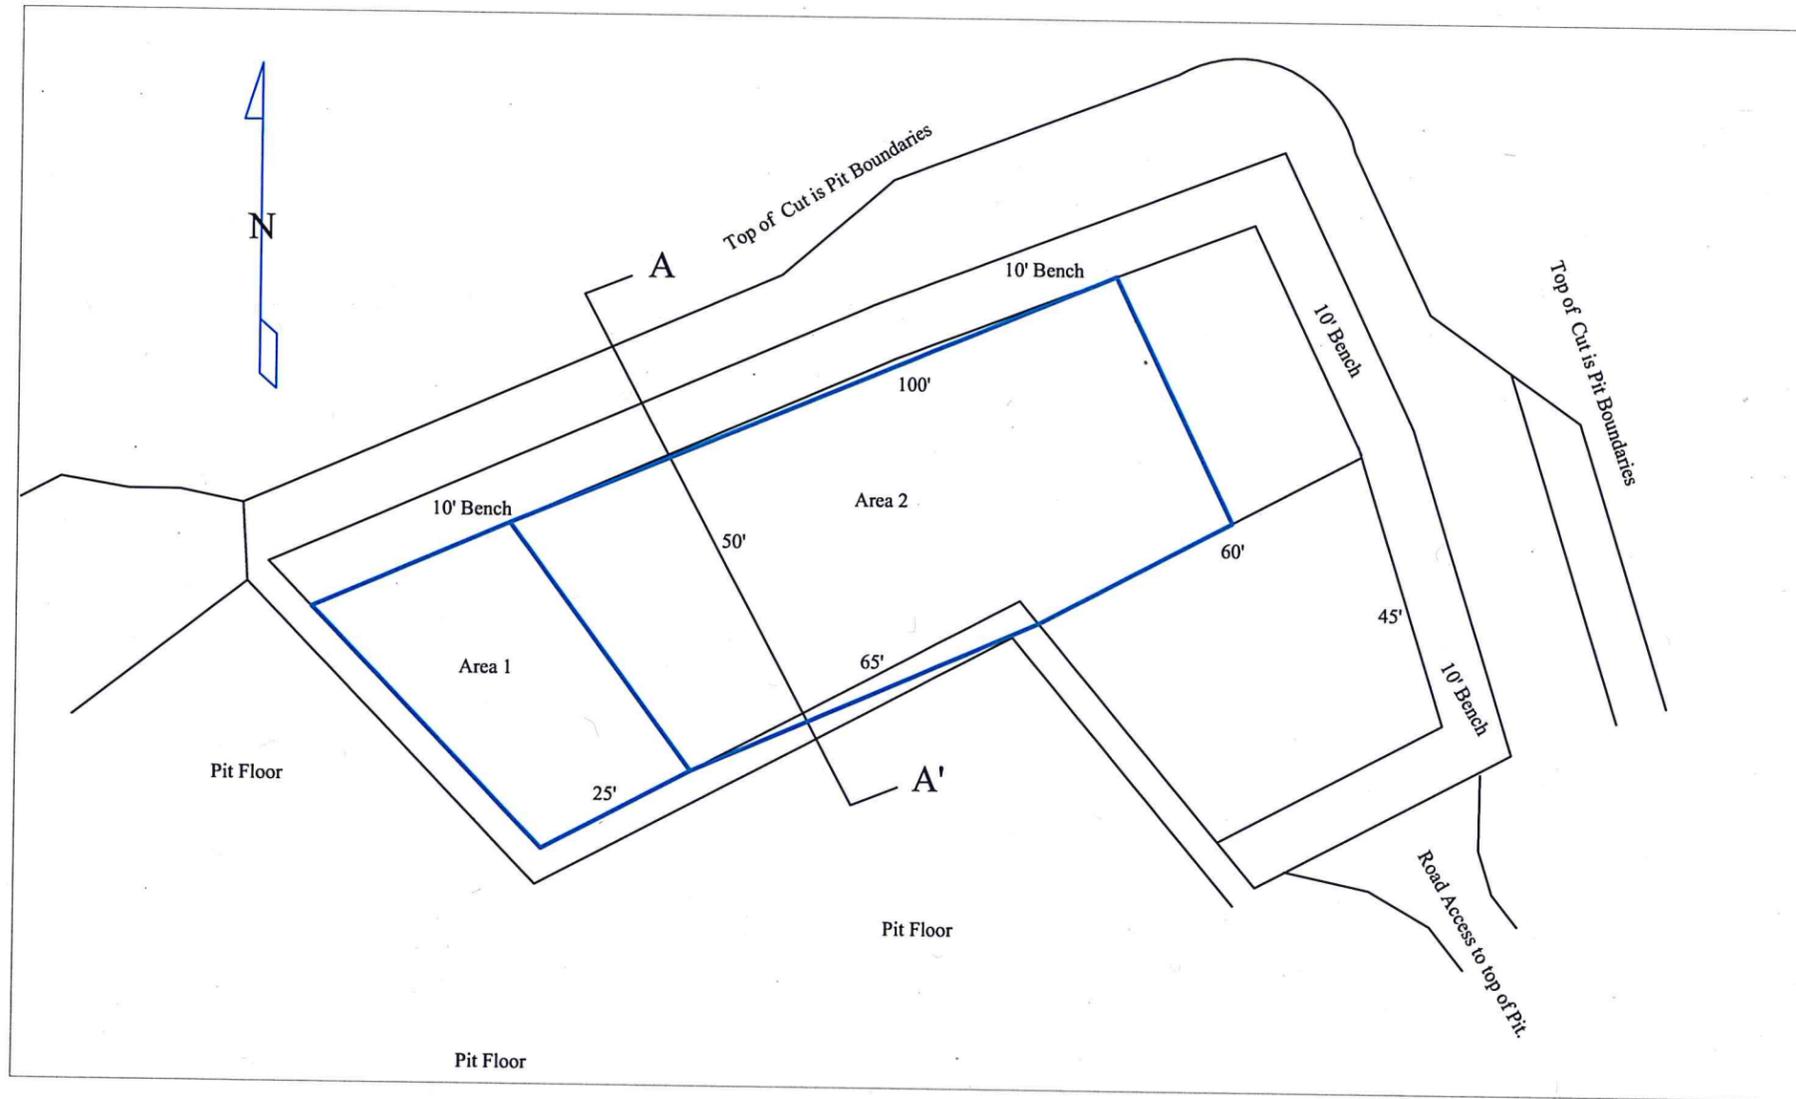


| <u>Area</u> | <u>Material Use</u> | <u>Quantity</u> | <u>Sale</u> |
|-------------|---------------------|-----------------|-------------|
| Area 1 | Pit Run | 620 CY | Switch T.S. |
| Area 2 | Temp. Road Rock | 2500 CY | Six T.S. |

Notes:

- 1) All operation shall be contained within Existing Boundaries. First Purchaser to use shall be responsible to coordinate use with others in the pit.
- 2) Area 1 is approved for use for Specified Road Reconstruction only for Switch T.S. and Area 2 is approved for use for Temp. Road building only for Six T.S.
- 3) Maximum Height of the operating face shall be 15'. The operating face shall be sloped back at 1 H: 1 V.
- 4) The operating face shall never encroach within 10' of the cutslope.
- 5) Finished Access road surface will be shaped consistent with the adjacent pit floor and maintain continued free drainage.
- 6) Waste, Overburden and Oversize shall be placed as directed by the C.O..

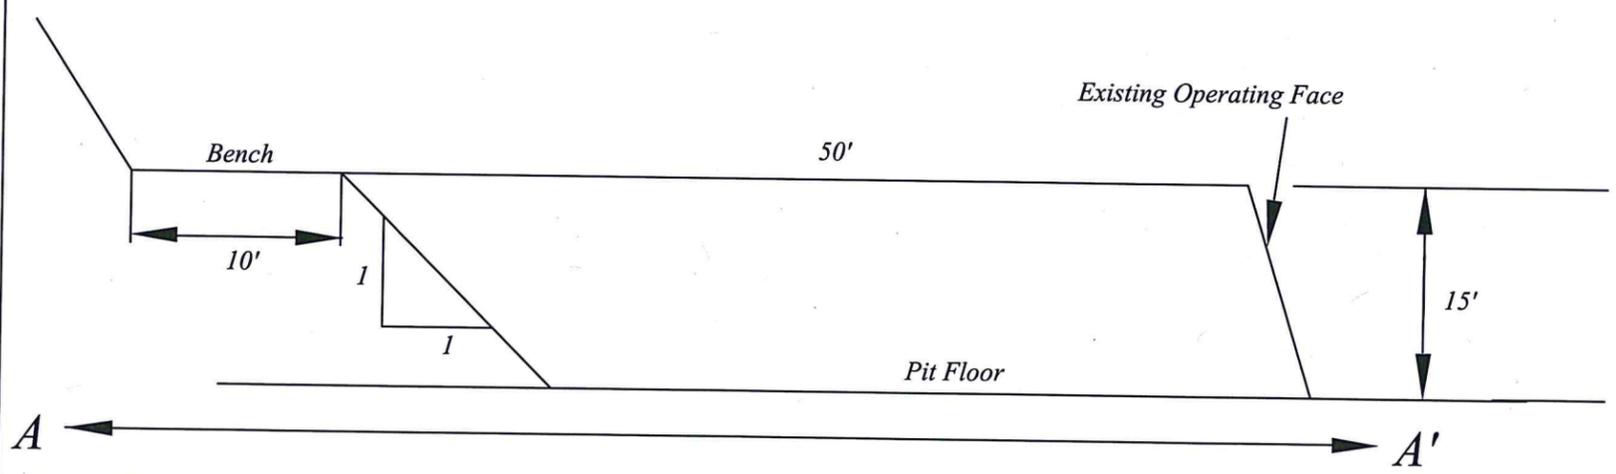

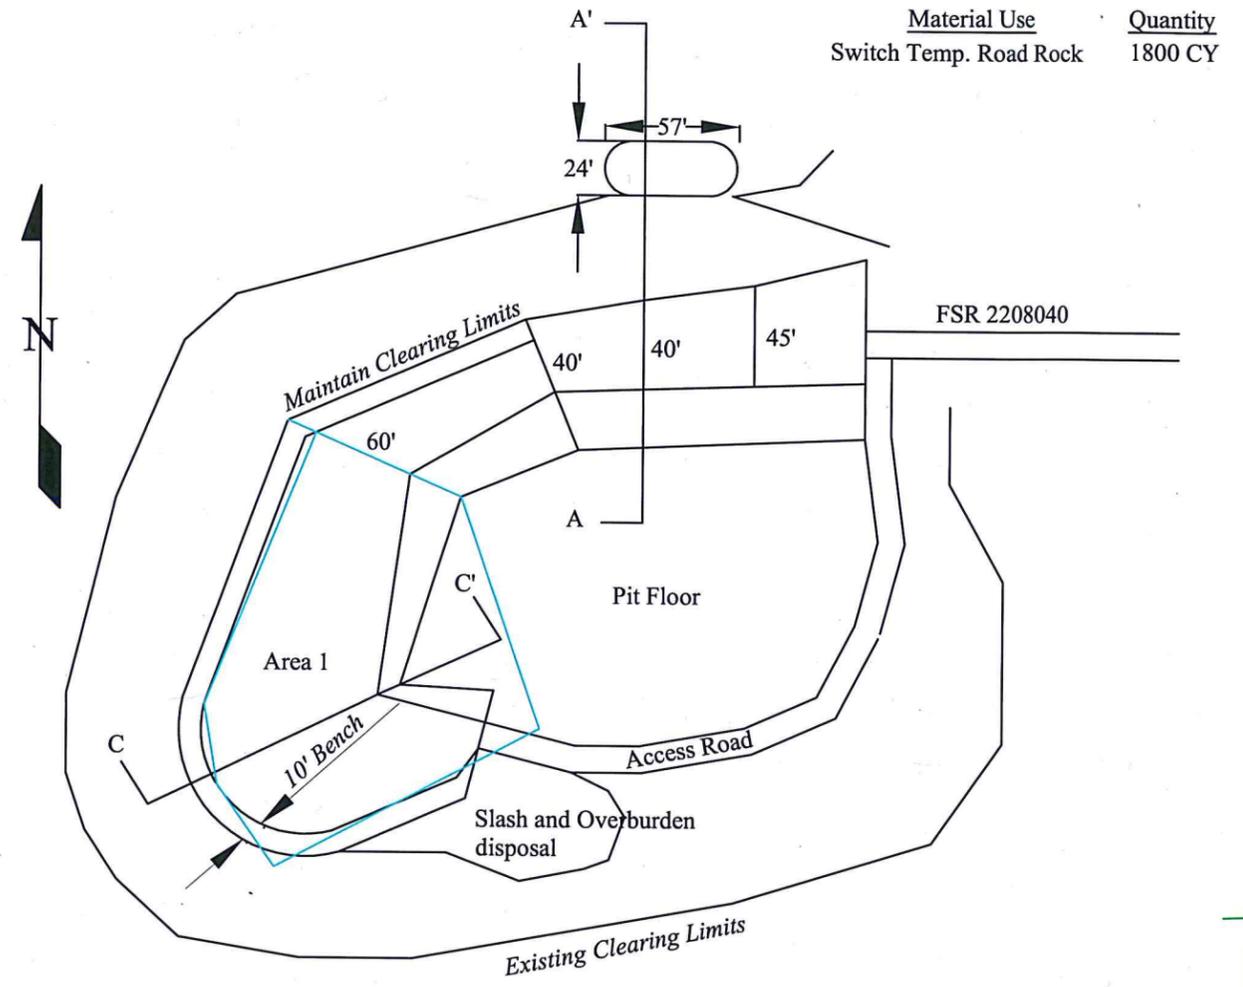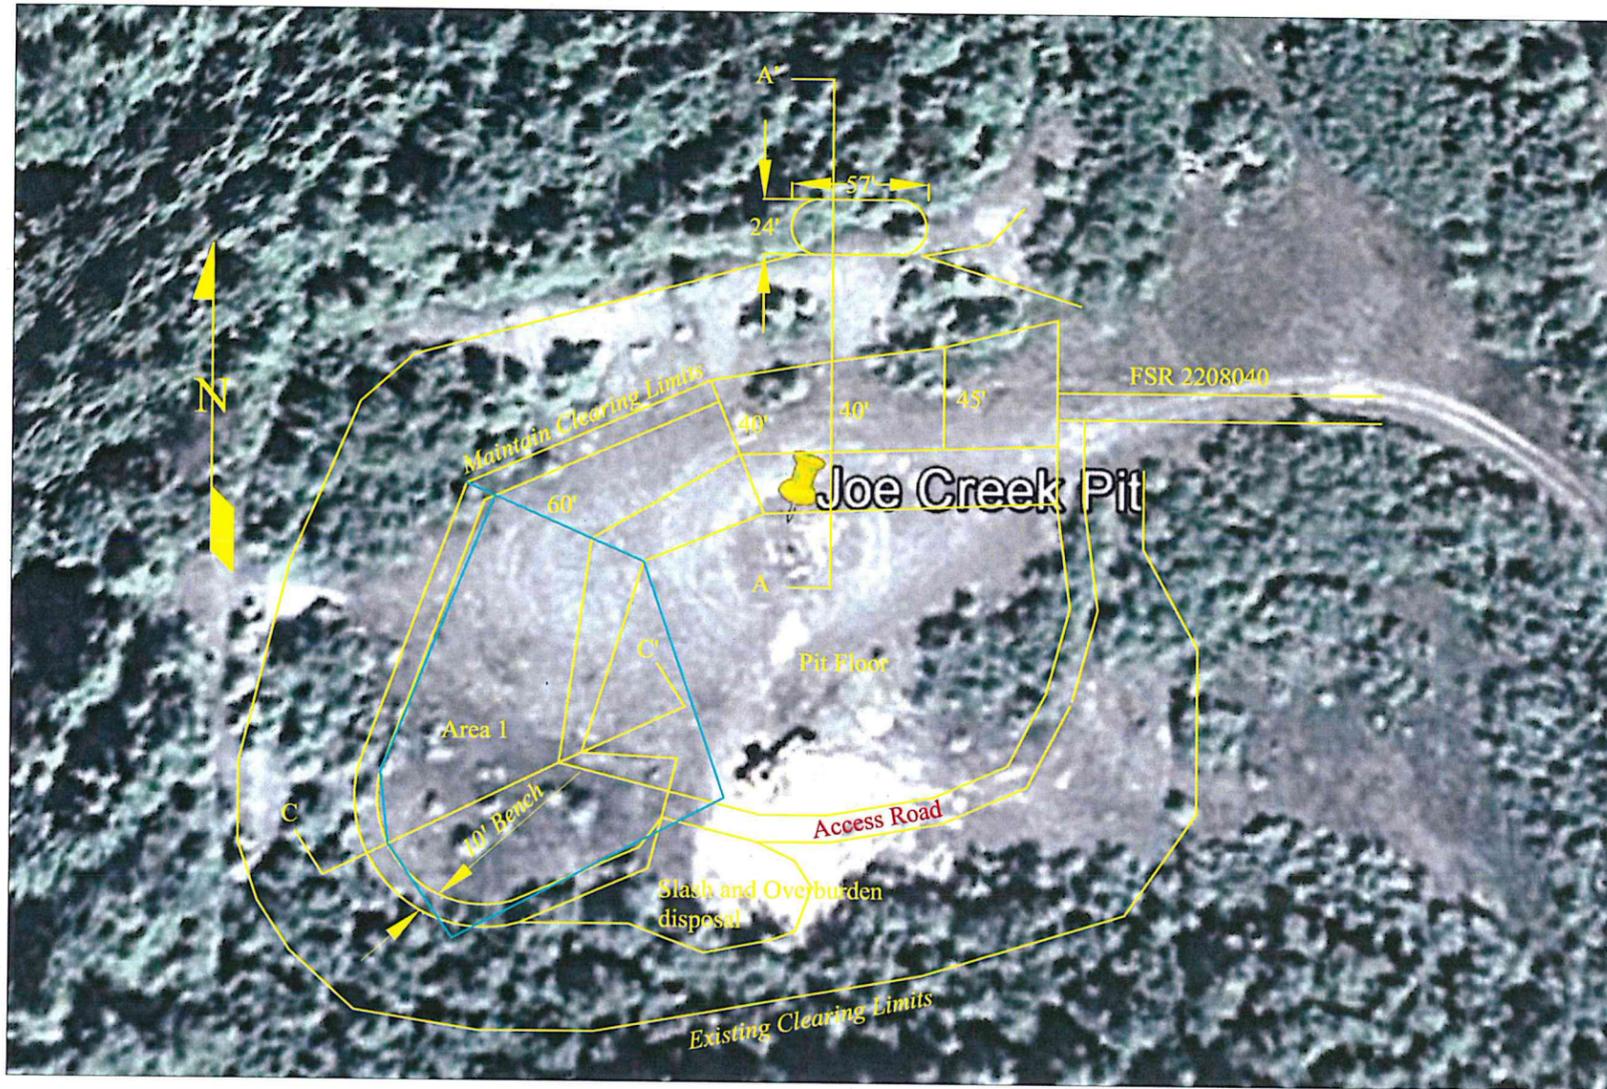

| Material Use | Quantity |
|------------------------|----------|
| Switch Temp. Road Rock | 1800 CY |

Notes:

- 1) All operation shall be contained within Existing Boundaries. Purchaser shall be responsible to coordinate use with others in the pit.
- 2) Area 1 is approved for use for Temp. Road building only.
- 3) Maximum Height of the operating face shall be 5'. The operating face shall be sloped back at 1 1/2 H: 1 V.
- 4) The operating face shall never encroach within 10' of the cutslope.
- 5) Finished Access road surface will be shaped consistent with the adjacent pit floor and maintain continued free drainage.
- 6) Waste, Overburden and Oversize shall be placed as directed by the C.O..

