


C5.41 DRAWINGS FOR SPECIFIED ROAD
 CLOSURE TO USE BY OTHERS
**BLUE DUCK SALVAGE
 TIMBER SALE**
 HAHNS PEAK/BEARS EARS RANGER DISTRICT

INDEX TO SHEETS

- 1 TITLE SHEET & PROJECT MAP
- 2 DESCRIPTIONS OF WORK
- 3 RECONTOURING & SLASH/LOG BARRICADE TYPICALS

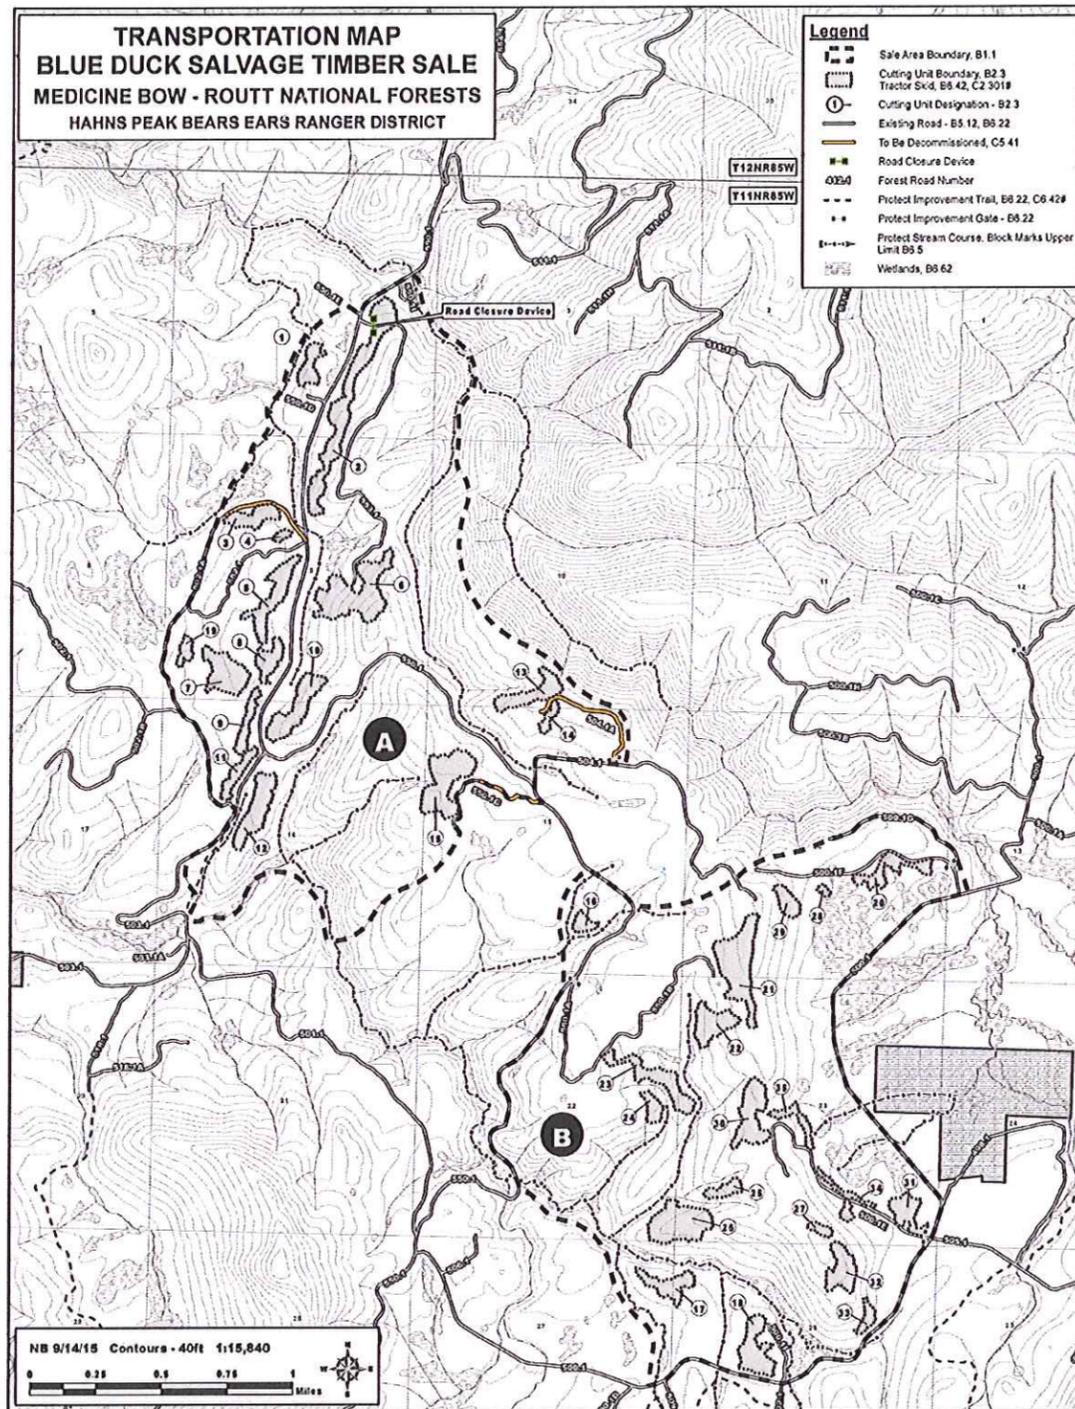

**Medicine Bow — Routt National Forests
 And
 Thunder Basin National Grassland**

PROJECT NAME:
 Blue Duck Salvage Timber Sale

SHEET TITLE:
 Title Sheet & Project Map

SCALE: None	SHEET: 1 Of 3
----------------	------------------

PREPARED BY: Timothy J. Maxwell 9/14/15
 Timothy Maxwell, Design Engineer Date

REVIEWED BY: Brandon P. Taglioli 9/14/15
 Brandon Taglioli, South Zone Engineer Date

I CERTIFY THE TECHNICAL ADEQUACY OF THESE DRAWINGS:
Dana R. Bardsley 9/16/2015
 Dana Bardsley, Forest Engineer Date

I CERTIFY THESE DRAWINGS COMPLY WITH LAND AND
 RESOURCE MANAGEMENT PLANS:
Chad Stewart 9/14/15
 Chad Stewart, HPBE District Ranger Date

APPROVED: Dennis Jaeger 9/16/15
 Dennis Jaeger, Forest Supervisor Date

DESCRIPTION OF WORK -- NFSR 502.1A (POST-HAUL CLOSURES)

Roadway Obliteration	Item Number	N/A					Remarks: 1) Ref. Provision C6.601 for Seed Mix & Specifications
	Unit of Measure	Mile					
	Station						
	0+00						B.O.P. Intersection with NFSR 504.1 Begin obliterating road: rip, recontour, & reseed.
	0+10						Existing 18" x 30' CMP. DO NOT REMOVE.
	0+50	↓					Begin obliterating road: rip, recontour, and reseed.
	21+00	0.4					E.O.P. End obliterating road.
	TOTAL	0.4					

DESCRIPTION OF WORK -- NFSR 550.1G (POST-HAUL CLOSURES)

Roadway Obliteration	Item Number	N/A					Remarks: 1) Ref. Provision C6.601 for Seed Mix & Specifications
	Unit of Measure	Mile					
	Station						
	0+00	↓					B.O.P. Intersection with NFSR 550.1 Begin obliterating road: rip, recontour, & reseed.
	0+05						Remove 18" CMP. Recontour ditch to original grade. Remove all fill.
	11+00	0.21					E.O.P. End obliterating road.
	TOTAL	0.21					

DESCRIPTION OF WORK -- NFSR 504.1A (POST-HAUL CLOSURES)

Roadway Obliteration	Item Number	N/A					Remarks: 1) Ref. Provision C6.601 for Seed Mix & Specifications
	Unit of Measure	Mile					
	Station						
	0+00	↓					B.O.P. Intersection with NFSR 504.1. Begin obliterating road: rip, recontour, & reseed.
	0+95						Existing USFS Type II Gate. Remove gate & braces, and dispose by leaving on-site.
	24+50	0.46					E.O.P. End obliterating road.
	TOTAL	0.46					

DESCRIPTION OF WORK -- NFSR 553.1 (POST-HAUL CLOSURES)

Road Closure: Type - Slash/Log Barricade	Item Number	N/A					Remarks:
	Unit of Measure	Each					
	Station						
	0+00						B.O.P. Intersection with NFSR 550.1
	4+25	1					E.O.P. Close road by constructing slash/log barricade.
	TOTAL	1					

U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE

R-2

ROCKY MOUNTAIN REGION

**Medicine Bow — Routt National Forests
And
Thunder Basin National Grassland**

PROJECT NAME:


Blue Duck Salvage Timber Sale

SHEET TITLE:
Description of Work

SCALE:
None

SHEET:
2 Of 3


TYPICAL SIDESLOPE

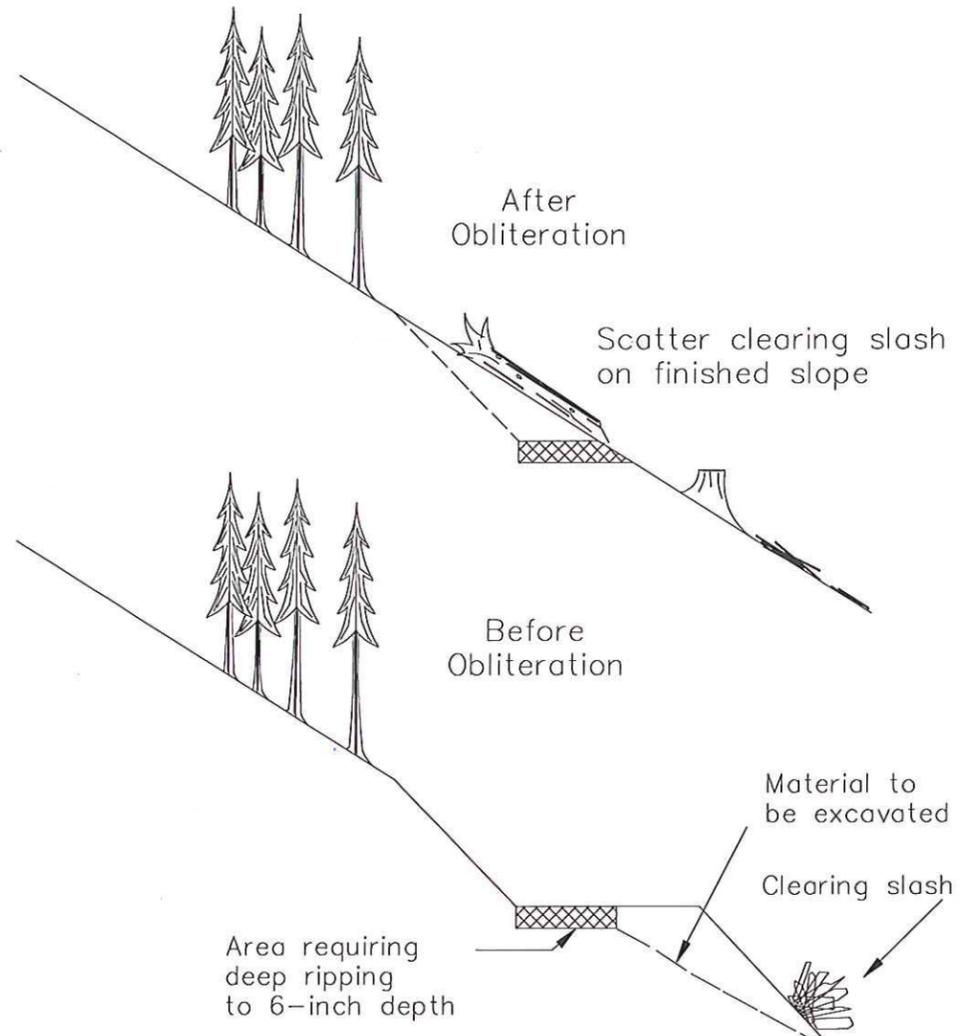

Recontouring Notes:

Obliterate the roadway by restoring to approximate original ground contours. Keep excavated material within the original construction limits. Loosen the roadbed by ripping to a minimum of 6 inches. Remove all specified drainage structures. Remove and slope embankment material at localized drainages to restore natural drainage patterns. Scatter any available slash on obliterated roadway.

LOG/SLASH BARRICADE

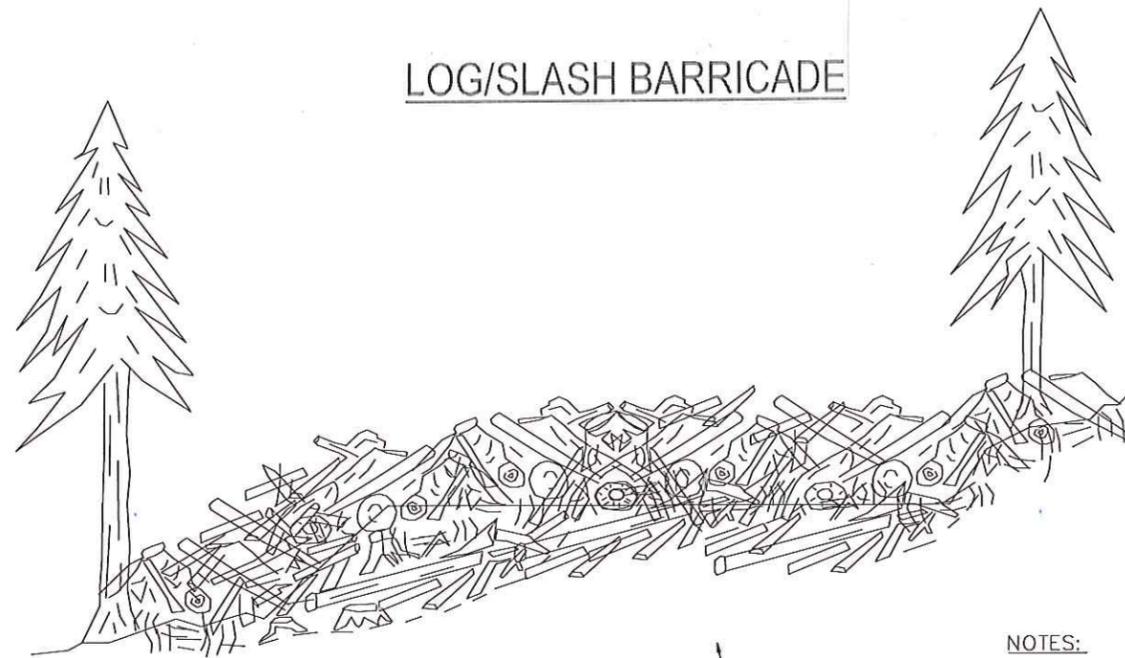

NOTES:

1. SPREAD SLASH AND LOGS TO COMPLETELY BLOCK ROAD TO VEHICULAR TRAFFIC.
2. ANCHOR TO NATURAL PINCH POINTS (INCLUDING LIVE TREES).
3. SLASH SHALL BE DISTRIBUTED TO AVOID MATTING.
4. BARRICADE SHOULD BE AT LEAST 3' TALL AND 15' LONG, IN ADDITION TO SPANNING THE TRAVELLED WAY AND SHOULDERS.

U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE

R-2

ROCKY MOUNTAIN REGION

Medicine Bow — Routt National Forests
And
Thunder Basin National Grassland

PROJECT NAME:

Blue Duck Salvage Timber Sale

SHEET TITLE:

Recontouring & Slash/Log Barricade Typical

SCALE:

None

SHEET:

3 Of 3