


Sully's Timber Sale Area and Slash Disposal Map

San Juan National Forest, Columbine RD

T 34.5N, R5W, NMPM
T 34N, R5W₂ NMPM

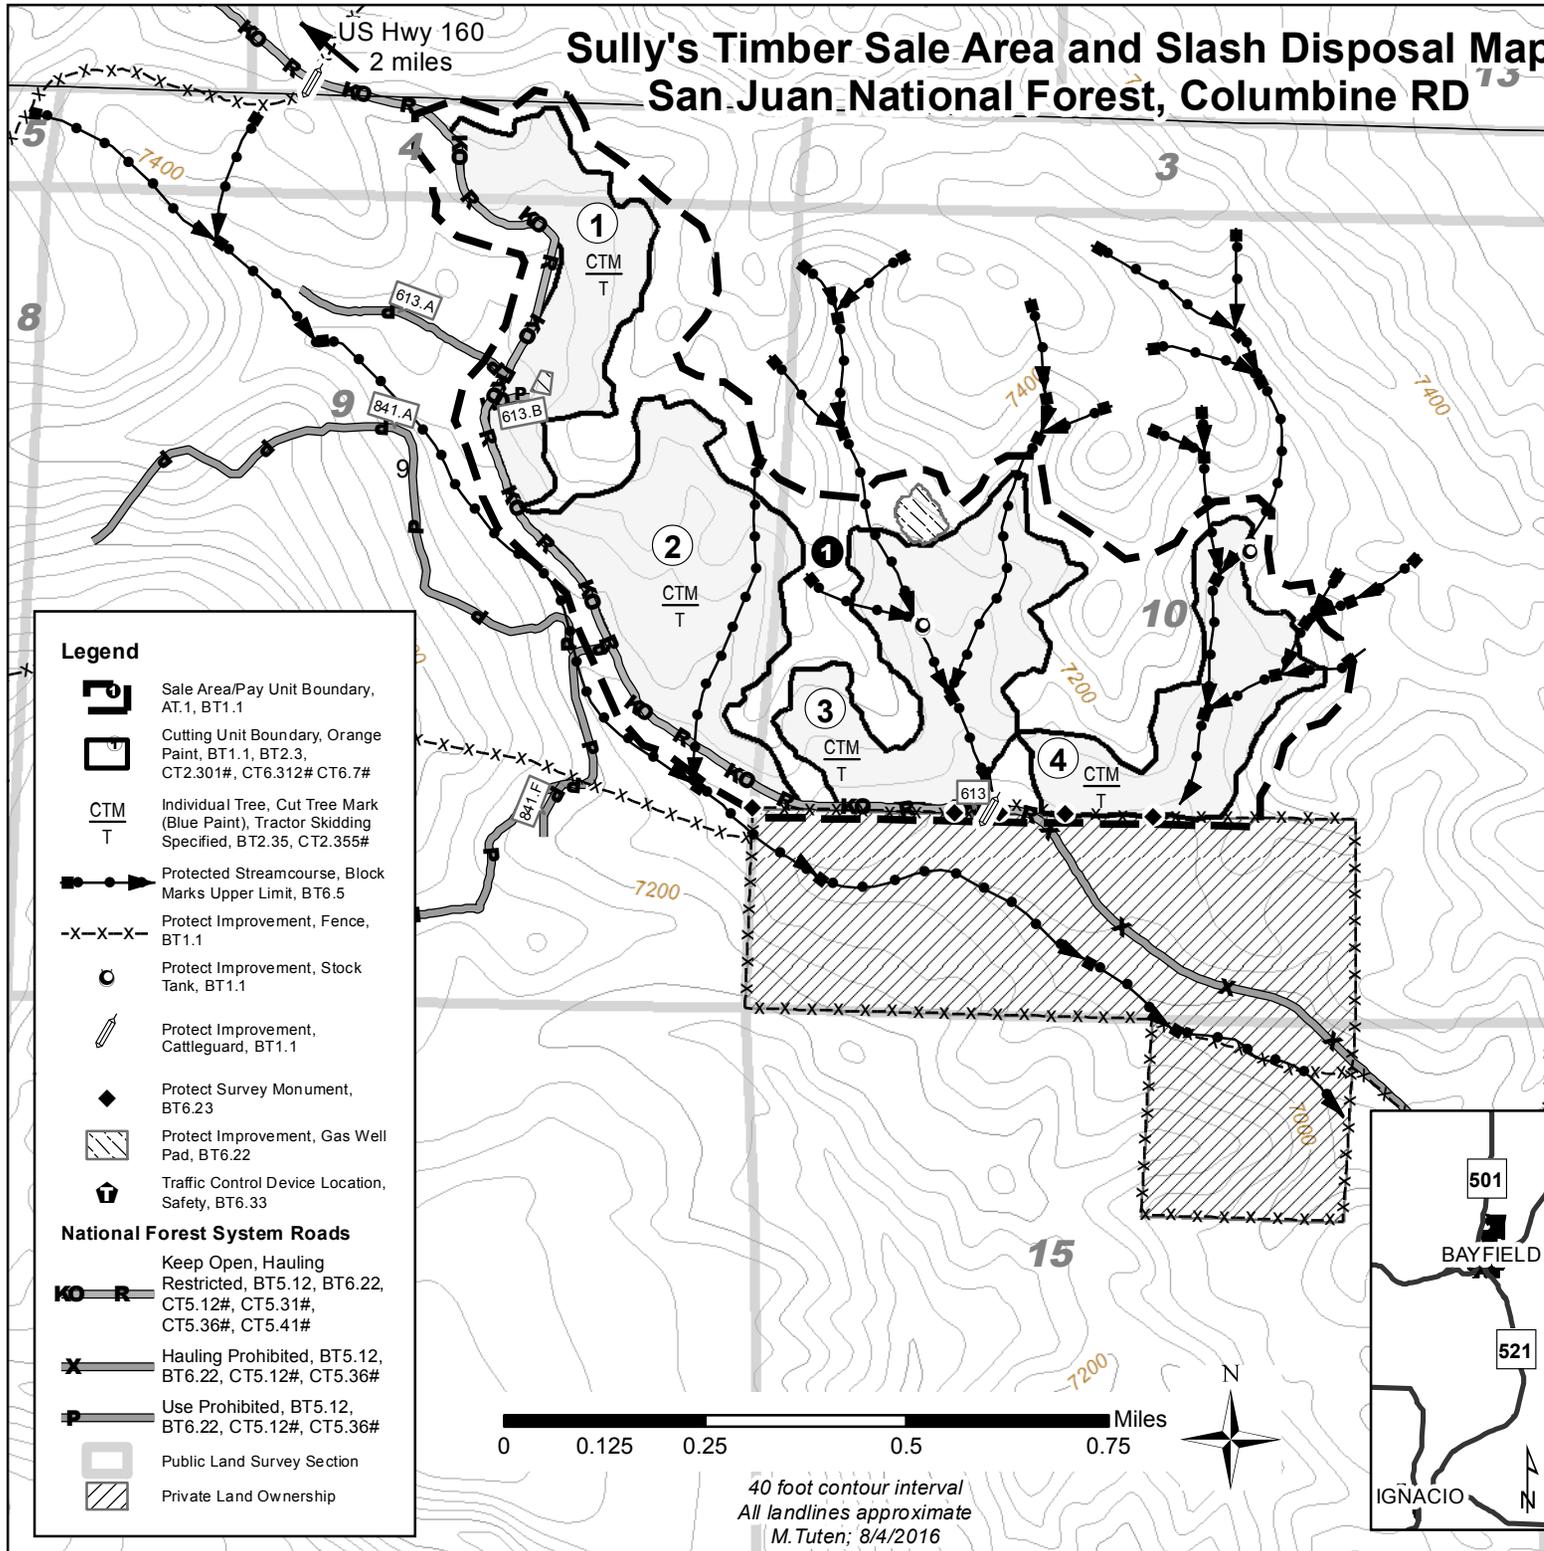

Legend

- Sale Area/Pay Unit Boundary, AT.1, BT1.1
- Cutting Unit Boundary, Orange Paint, BT1.1, BT2.3, CT2.301#, CT6.312# CT6.7#
- Individual Tree, Cut Tree Mark (Blue Paint), Tractor Skidding Specified, BT2.35, CT2.355#
- Protected Streamcourse, Block Marks Upper Limit, BT6.5
- Protect Improvement, Fence, BT1.1
- Protect Improvement, Stock Tank, BT1.1
- Protect Improvement, Cattleguard, BT1.1
- Protect Survey Monument, BT6.23
- Protect Improvement, Gas Well Pad, BT6.22
- Traffic Control Device Location, Safety, BT6.33

National Forest System Roads

- Keep Open, Hauling Restricted, BT5.12, BT6.22, CT5.12#, CT5.31#, CT5.36#, CT5.41#
- Hauling Prohibited, BT5.12, BT6.22, CT5.12#, CT5.36#
- Use Prohibited, BT5.12, BT6.22, CT5.12#, CT5.36#
- Public Land Survey Section
- Private Land Ownership

CT6.7# Slash Treatment: All Cutting units

Type of Slash Disposal:

Approximately 80% of slash generated by harvesting activities shall either be piled within cutting units or at landings.

Piling shall be accomplished by hand or by tractor equipped with a brush rake or grapple. Piles shall be reasonably compact, in as much of a "vertical" position as possible and free of soil to facilitate burning. Material extending 3 feet or more outside the edge of a pile shall be trimmed.

Piles shall be of a minimum size of approximately 6 x 6 x 6 ft and a maximum size of approximately 40 x 40 x 20 ft.

Piles shall be located at least 100 feet from well pads and 50 feet from cut unit boundaries and streamcourses. Piles shall be located a minimum of approximately twice their diameter from residual trees greater than 6" DBH/DRC.


Slash piles shall not contain material greater than 6" DOB small end.

Logging slash at landings 6 inches or larger in small end DOB shall be cut to a maximum length of 8 feet and decked by piling pieces parallel to each other to a maximum height of 5 feet.

All remaining slash shall be lopped and scattered to within 24 inches of the ground.

All trees less than 8 inches DBH, over 5 feet in height, and damaged beyond recovery by Purchaser's Operations shall be felled. Such trees shall be limbed to a stem diameter outside bark of approximately 3 inches, at which point the top shall be cut from the remainder of the stem, and shall be bucked into lengths not exceeding 20 feet.

-Noxious weeds are present within the sale area-



40 foot contour interval
All landlines approximate
M. Tuten; 8/4/2016

