

USDA FOREST SERVICE
FP-03 STANDARD SPECIFICATIONS FOR CONSTRUCTION OF ROADS &
BRIDGES ON FEDERAL HIGHWAY PROJECTS,
FP-03 FS SUPPLEMENTAL SPECIFICATIONS (NATIONAL)

PROJECT NAME: YODA TIMBER SALE

SPECIFICATION LIST

Spec. No.	FS Specification	Last Revision Date
	Preface	3/15/2004
101	Terms, Formats and Definitions	2003
101.00	Terms, Formats and Definitions	7/25/2005
101.01	Terms, Formats and Definitions	1/22/2009
101.03	Terms, Formats and Definitions	6/16/2006
101.04	Terms, Formats and Definitions	3/29/2007
102	Bid, Award, and Execution of Contract	2003
102.00	Bid, Award, and Execution of Contract	2/16/2005
103	Scope of work	2003
103.00	Scope of work	2/16/2005
104	Control of Work	2003
104.00	Control of Work	6/16/2006
104.03	Control of Work	1/22/2009
104.06	Control of Work	2/17/2005
105	Control of Materials	2003
105.02(a)	Control of Materials	1/18/2007
105.05	Control of Materials	5/12/2004
106	Acceptance of Work	2003
106.01	Acceptance of Work	7/31/2007
106.07	Acceptance of Work	5/11/2004
107	Legal Relations and responsibility To the Public	2003

Spec. No.	FS Specification	Last Revision Date
107.05	Legal Relations and responsibility To the Public	5/11/2004
107.06	Legal Relations and responsibility To the Public	6/16/2006
107.08	Legal Relations and responsibility To the Public	3/29/2005
107.09	Legal Relations and responsibility To the Public	6/16/2006
107.10	Legal Relations and responsibility To the Public	6/16/2006
108	Prosecution and Progress	2003
108.00	Prosecution and Progress	2/16/2005
109	Measurement and Payment	2003
109.00	Measurement and Payment	2/17/2005
109.02	Measurement and Payment	6/16/2006
151	Mobilization	2003
152	Construction Survey and Staking	2003
153	Contractor Quality Control	2003
154	Contractor Sampling and Testing	2003
155	Schedules for Construction Contracts	2003
155.00	Schedules for Construction Contracts	5/11/2004
156	Public Traffic	2003
156.00	Public Traffic	4/17/2007
157	Soil Erosion Control	2003
170.00	Develop Water Supply and Watering	3/30/2005
171.00	Weed & Disease Prevention	3/30/2005
301	Untreated Aggregate Courses	2003
301.00	Title Change	3/3/2005
301.01	Work	3/3/2005
301.02	Material	5/16/2005
301.03	General	2/28/2013

301.04	Mixing and Spreading	3/3/2005
301.05	Compacting	5/17/2005
301.06	Surface Tolerance	3/3/2005
301.08	Acceptance	10/14/2011
301.08	Acceptance	3/3/2005
301.08	Acceptance	2/7/2007
301.09	Measurement	7/7/2005
301.10	Payment	3/3/2005
303	Road Reconditioning	2003
303.01	Road Reconditioning	3/2/2005
703	Aggregate	2003
703.05	Subbase, Base, & Surface Course Aggregate	8/14/2009
703.10	Flakiness Index and Adherent Coatings	4/11/2011
718	Traffic Signing and Marking Material	2003
718.05	Aluminum Panels	8/5/2009
725	Miscellaneous Material	2003
725.01	Juvenile Fish Protection	5/4/2006

Preface

Preface_wo_03_15_2004_m

Delete all but the first paragraph and add the following:

The Forest Service, US Department of Agriculture has adopted FP-03 for construction of National Forest System Roads.

101 - Terms, Format, and Definitions

101.00_nat_us_07_25_2005

101.01_nat_us_01_22_2009

101.01 Meaning of Terms

Delete all references to the TAR (Transportation Acquisition Regulations) in the specifications.

101.03_nat_us_06_16_2006

101.03 Abbreviations.

Add the following to (a) Acronyms:

AFPA	American Forest and Paper Association
MSHA	Mine Safety and Health Administration
NIST	<u>National Institute of Standards and Technology</u>
NESC	National Electrical Safety Code
WCLIB	West Coast Lumber Inspection Bureau

Add the following to (b) SI symbols:

mp	Milepost
ppm	Part Per Million

101.04_nat_us_03_29_2007

101.04 Definitions.

Delete the following definitions and substitute the following:

Bid Schedule--The Schedule of Items.

Bridge--No definition.

Contractor--The individual or legal entity contracting with the Government for performance of prescribed work. In a timber sale contract, the contractor is the "purchaser".

Culvert--No definition.

Right-of-Way--A general term denoting (1) the privilege to pass over land in some particular line (including easement, lease, permit, or license to occupy, use, or traverse public or private lands), or (2) Real property necessary for the project, including roadway, buffer areas, access, and drainage areas.

Add the following:

Adjustment in Contract Price--“Equitable adjustment,” as used in the Federal Acquisition Regulations, or “construction cost adjustment,” as used in the Timber Sale Contract, as applicable.

Change--“Change” means “change order” as used in the Federal Acquisition Regulations, or “design change” as used in the Timber Sale Contract.

Design Quantity--“Design quantity” is a Forest Service method of measurement from the FS-96 *Forest Service Specifications for the Construction of Roads and Bridges*. Under these FP specifications this term is replaced by the term “Contract Quantities”.

Forest Service--The United States of America, acting through the Forest Service, U.S. Department of Agriculture.

Neat Line--A line defining the proposed or specified limits of an excavation or structure.

Pioneer Road--Temporary construction access built along the route of the project.

Purchaser--The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through agents, employees, or subcontractors.

Protected Streamcourse--A drainage shown on the plans or timber sale area map that requires designated mitigation measures.


Road Order--An order affecting and controlling traffic on roads under Forest Service jurisdiction. Road Orders are issued by a designated Forest Officer under the authorities of 36 CFR, part 260.

Schedule of Items--A schedule in the contract that contains a listing and description of construction items, quantities, units of measure, unit price, and amount.

Utilization Standards--The minimum size and percent soundness of trees described in the specifications to determine merchantable timber.

Add Figure 101-1—Illustration of road structure terms:

Figure 101-1—Illustration of road structure terms.

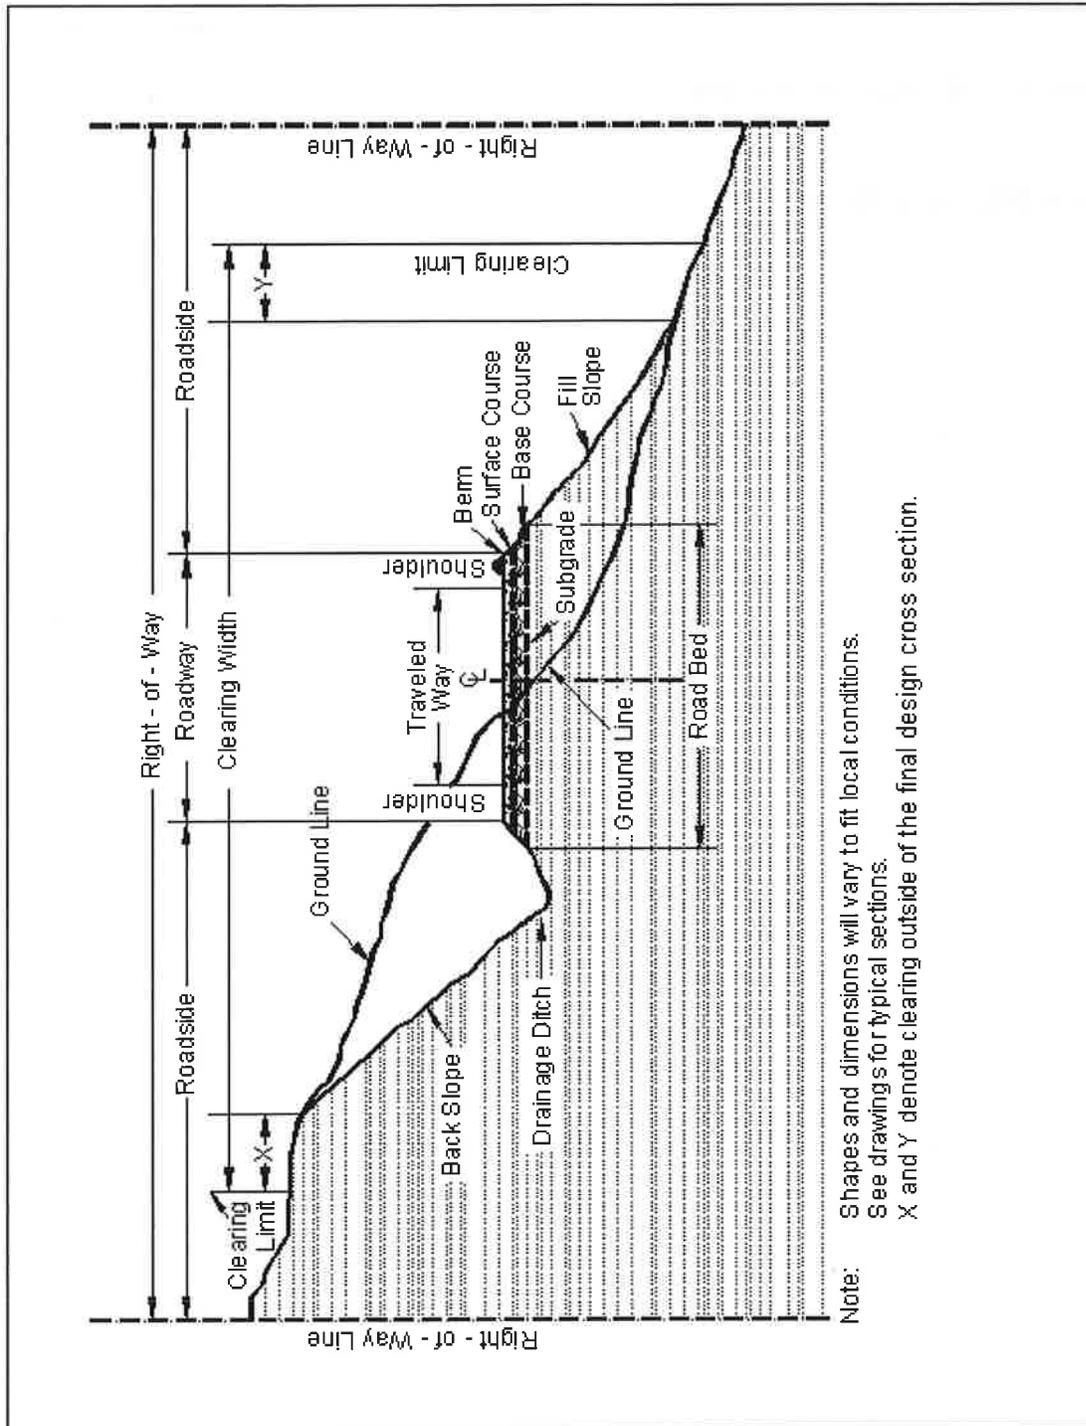

Note: Shapes and dimensions will vary to fit local conditions.
 See drawings for typical sections.
 X and Y denote clearing outside of the final design cross section.

102 - Bid, Award, and Execution of Contract

102.00_nat_us_02_16_2005

102 Bid, Award, and Execution of Contract

Delete Section 102 in its entirety.

103 - Scope of Work

103.00_nat_us_02_16_2005

Deletions

Delete all but subsection 103.01 Intent of Contract.

104 - Control of Work

104.00_nat_us_06_16_2006

Deletions

Delete Sections 104.01, 104.02, and 104.04.

104.03_nat_us_01_22_2009

104.03 Specifications and Drawings.

Delete 104.03.

104.06_nat_us_02_17_2005

Add the following subsection:

104.06 Use of Roads by Contractor

The Contractor is authorized to use roads under the jurisdiction of the Forest Service for all activities necessary to complete this contract, subject to the limitations and authorizations designated in the Road Order(s) or described in the contract, when such use will not damage the roads or national forest resources, and when traffic can be accommodated safely.

105 - Control of Material

105.02_nat_us_01_18_2007

105.02 Material Sources.

105.02(a) Government-provided sources.

Add the following:

Comply with the requirements of 30 CFR 56, subparts B and H. Use all suitable material for aggregate regardless of size unless otherwise designated. When required, re-establish vegetation in disturbed areas according to section 625.

105.05_nat_us_05_12_2004

105.05 Use of Material Found in the Work.

Delete 105.05 (a) and (b) and the last sentence of the second paragraph and substitute the following:

Materials produced or processed from Government lands in excess of the quantities required for performance of this contract are the property of the Government. The Government is not obligated to make reimbursement for the cost of producing these materials.

106 - Acceptance of Work

106.01_nat_us_07_31_2007

106.01 Conformity with Contract Requirements.

Delete Subsection 106.01 and substitute the following:

References to standard test methods of AASHTO, ASTM, GSA, and other recognized standard authorities refer to the methods in effect on the date of solicitation for bids.

Perform all work to the lines, grades, cross-sections, dimensions, and processes or material requirements shown on the plans or specified in the contract.

Incorporate manufactured materials into the work according to the manufacturer's recommendations or to these specifications, whichever is more strict.

Plan dimensions and contract specification values are the values to be strived for and complied with as the design values from which any deviations are allowed. Perform work and provide material that is uniform in character and reasonably close to the prescribed value or within the specified tolerance range. The purpose of a tolerance range is to accommodate occasional minor variations from the median zone that are unavoidable for practical reasons.

When standard manufactured items are specified (such as fence, wire, plates, rolled shapes, pipe conduits, etc., that are identified by gauge, unit mass, section dimensions, etc.), the identification will be considered to be nominal masses or dimensions. Unless specific contract tolerances are noted, established manufacturing tolerances will be accepted.

The Government may inspect, sample, or test all work at any time before final acceptance of the project. When the Government tests work, copies of test reports are furnished to the Contractor upon request. Government tests may or may not be performed at the work site. If Contractor testing and inspection is verified by the Government, the Contractor's results may be used by the Government to evaluate work for acceptance. Do not rely on the availability of Government test results for process control.

Acceptable work conforming to the contract will be paid for at the contract unit bid price. Four methods of determining conformity and accepting work are described in Subsections 106.02 to 106.05 inclusive. The primary method of acceptance is specified in each Section of work. However, work may be rejected at any time it is found by any of the methods not to comply with the contract.

Remove and replace work that does not conform to the contract, or to prevailing industry standards where no specific contract requirements are noted, at no cost to the Government.

(a) Disputing Government test results. If the accuracy of Government test results is disputed, promptly inform the CO. If the dispute is unresolved after reasonable steps are taken to resolve the dispute, further evaluation may be obtained by written request. Include a narrative describing the dispute and a proposed resolution protocol that addresses the following:

- (1) Sampling method;
- (2) Number of samples;
- (3) Sample transport;
- (4) Test procedures;
- (5) Testing laboratories;
- (6) Reporting;
- (7) Estimated time and costs; and
- (8) Validation process.

If the evaluation requires additional sampling or testing be performed, mutually agree with the Government on witnessing procedures and on sampling and testing by a third party laboratory. Use a third party laboratory accredited by the AASHTO accreditation program. Provide proof of the laboratory's accreditation for the test procedures to be used. Do not use the same laboratory that produced the disputed Government test results or that produced the test results used as a basis for the dispute.

The CO will review the proposed resolution protocol and may modify it before final approval and execution.

The Government will use the approved resolution protocol test results to determine the validity of the disputed testing. If the Government test results are validated, the Contractor will be responsible for all costs associated with developing and performing the resolution protocol. If the Government test results are not validated, the Government will be responsible for all costs associated with developing and performing the resolution protocol. If the validity of the Government test results cannot be determined, the Contractor and Government will equally share all costs associated with developing and carrying out the resolution protocol.

(b) Alternatives to removing and replacing non-conforming work. As an alternative to removal and replacement, the Contractor may submit a written request to:

- (1) Have the work accepted at a reduced price; or
- (2) Be given permission to perform corrective measures to bring the work into conformity.

The request must contain supporting rationale and documentation. Include references or data justifying the proposal based on an evaluation of test results, effect on service life, value of material or work, quality, aesthetics, and other tangible engineering basis. The CO will determine disposition of the nonconforming work.

106.07 Delete

Delete subsection 106.07.

107 - Legal Relations and Responsibility to the Public

107.05_nat_us_05_11_2004

107.05 Responsibility for Damage Claims.

Delete the entire subsection.

107.06_nat_us_06_16_2006

107.06 Contractor's Responsibility for Work.

Delete the following from the first paragraph.

“except as provided in Subsection 106.07”.

107.08_nat_us_03_29_2005

107.08 Sanitation, Health, and Safety

Delete the entire subsection.

107.09_nat_us_06_16_2006

107.09 Legal Relationship of the Parties.

Delete the entire subsection.

107.10_nat_us_06_16_2006

107.10 Environmental Protection.

Add the following:

Design and locate equipment repair shops, stationary refueling sites, or other facilities to minimize the potential and impacts of hazardous material spills on Government land.

Before beginning any work, submit a Hazardous Spill Plan. List actions to be taken in the event of a spill. Incorporate preventive measures to be taken, such as the location of mobile refueling facilities, storage and handling of hazardous materials, and similar information. Immediately notify the CO of all hazardous material spills. Provide a written narrative report form no later than 24 hours after the initial report and include the following:

- Description of the item spilled (including identity, quantity, manifest number, and other identifying information).
- Whether amount spilled is EPA or state reportable, and if so whether it was reported, and to whom.

- Exact time and location of spill including a description of the area involved.
- Containment procedures.
- Summary of any communications the Contractor had with news media, Federal, state and local regulatory agencies and officials, or Forest Service officials.
- Description of clean-up procedures employed or to be employed at the site including final disposition and disposal location of spill residue.

When available provide copies of all spill related clean up and closure documentation and correspondence from regulatory agencies.

The Contractor is solely responsible for all spills or leaks that occur during the performance of this contract. Clean up spills or leaks to the satisfaction of the CO and in a manner that complies with Federal, state, and local laws and regulations.

108 - Prosecution and Progress

108.00_nat_us_02_16_2005

108 Delete.

Delete Section 108 in its entirety.

109 - Measurement and Payment

109.00_nat_us_02_17_2005

109 Deletions

Delete the following entire subsections:

109.06 Pricing of Adjustments.

109.07 Eliminated Work.

109.08 Progress Payments.

109.09 Final Payment.

109.02_nat_us_06_16_2006

109.02 Measurement Terms and Definitions.

(b) Contract quantity.

Add the following:

Contract quantities will be adjusted only when there are errors in the original design of 15% or more.

Change the following:

“(b) Cubic yard” to “(c) Cubic yard”.

Add the following definition:

(p) Thousand Board Feet (Mbf). 1,000 board feet based on nominal widths, thickness, and extreme usable length of each piece of lumber or timber actually incorporated in the job. For glued laminated timber, 1,000 board feet based on actual width, thickness, and length of each piece actually incorporated in the job.

155 - Schedules for Construction Contracts

155.00_nat_us_05_11_2004

155 Delete.

Delete Section 155 in its entirety.

156 - Public Traffic

156.00_nat_us_04_17_2007

Delete Section 156 in its entirety and replace with the following:

Description

156.01 This work consists of controlling and protecting public traffic adjacent to and within the project.

Material

156.02 Conform to the MUTCD and the following Sections and Subsections:

Construction sign panels	633
Retro-reflective sheeting	718.01
Temporary concrete barrier	618
Temporary plastic fence	710.11
Temporary traffic control devices	718.22

156.03 General. Unless otherwise provided for in Table 156-1, keep existing roads open to all traffic during road improvement work, and maintain them in a condition that will adequately accommodate traffic. Delays may not exceed 30 minutes at any one time followed by an open period of no less than 10 minutes.

Perform no work that interferes or conflicts with traffic or existing access to the roadway surface until a traffic control plan has been approved. Post construction signs and traffic control devices in conformance with MUTCD. All required signs will be in place and approved prior to beginning work on project.

If the Contractor agrees in writing to allow public traffic to use a new road being constructed prior to completion, it will be considered an existing road for traffic control purposes.

156.04 Temporary Traffic Control. Install and maintain temporary traffic control devices adjacent to and within the project as required by the approved traffic control plan and the MUTCD. Install and maintain traffic control devices as follows:

- (a) Furnish and install traffic control devices before the start of construction operations.
- (b) All detours outside of clearing limits will be approved in writing by the Contracting Officer as part of the traffic control plan.
- (c) Install only those traffic control devices needed for each stage or phase.
- (d) Relocate temporary traffic control devices as necessary.
- (e) Remove devices that no longer apply to the existing conditions.
- (f) Immediately replace any device that is lost, stolen, destroyed, or inoperative.
- (g) Keep temporary traffic control devices clean.
- (h) Remove all temporary traffic control devices upon contract completion or when approved.
- (i) When required, use flaggers certified by the American Traffic Safety Services Association, the National Safety Council, the International Municipal Signal Association, a state agency, or other acceptable organization. Perform the work described under MUTCD Part 6. Use type III, VII, VIII, or IX retroreflective sheeting on flagger paddles. Do not use flags. Flaggers must wear high visibility safety apparel as required by MUTCD 6E.02.

156.05 Temporary Closures. Road segments may be closed as shown in Table 156-1. The maximum consecutive days of closure shall be followed by a minimum number of consecutive days open to traffic as shown. Maintain traffic control devices during closure period(s). Appropriate barricades and signs will be erected and maintained as shown in the traffic control plan or as otherwise designated.

Prior to closing roads during construction, give written notice to the Contracting Officer at least 10 days in advance.

Table 156-1

Temporary Road Closures

Road Number	From Terminus	To Terminus	Maximum Consecutive Days of Closure	Minimum Consecutive Days Open
FS Road 2120	M.P. 0.0	M.P. 2.22	Road can not be closed for a whole day. See spec. 156.3 for closure times.	Road to remain open during road reconditioning activities.

156.06 Acceptance. Public traffic work will be evaluated under Subsection 106.02.

Measurement and Payment

156.07 Do not measure Public Traffic for payment. Compensation is made as an indirect payment.

170 - Develop Water Supply and Watering

170.00_nat_us_03_30_2005

Description

170.01 This work consists of developing an acceptable water supply, furnishing, hauling, and applying water.

Materials

170.02 Conform to the following subsection.

Water	725.01.
-------	---------

Construction Requirements

170.03 Development of Supply & Access. Develop water supplies and access to the water supplies as required. Use designated water sources or other approved water sources. Before using non-designated water sources, obtain all necessary permissions, water rights, and permits.

170.04 Equipment. Provide mobile watering equipment with watertight tanks of known capacity. Provide for positive control of water application from the driver's position.

170.05 Application. Apply water uniformly without ponding or washing.

170.06 Acceptance. Developing water supplies and watering will be evaluated under Subsections 106.02 and 106.04.

Measurement

170.07 Measure the Section 170 items listed in the bid schedule according to Subsection 109.02.

Payment

170.08 The accepted quantities will be paid at the contract price per unit of measurement for the Section 170 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

171 - Weed and Disease Prevention

171.00_nat_us_03_30_2005

Description

171.01 This work consists of washing and treating construction equipment to remove seeds, plants, and plant fragments from the equipment before the equipment is used on National Forest System lands.

Material

171.02 Conform to the following Subsection:

Water

725.01

Construction Requirements

171.03 General . Notify the CO in writing at least 15 days before moving any construction equipment onto National Forest System lands. Construction equipment does not include cars, pickup trucks, and other vehicles that regularly travel between the construction site and areas outside of National Forest System lands.

Perform all work at a location designated on the plans or other locations approved in writing. Provide the CO with an opportunity to monitor the washing and inspection.

171.04 Equipment. Use a high pressure washing system.

For work on National Forest System lands, use a washing system that traps all wash water and either stores it for removal from National Forest System lands or recycles the water for continued use. If the equipment recycles the water, provide adequate filters for seed removal. Dispose of

the filter material and removed seeds in an approved manner. Do not mix soaps, detergents, or other chemicals with the wash water.

For work at a commercial washing facility, use an approved facility.

171.05 Washing. Wash the sides, tops, and undercarriages of all construction equipment. Remove all seeds, plants, plant fragments, dirt, and debris from the construction equipment.

171.06 Inspection. Inspect the washed construction equipment, including the undercarriage, to ensure that the washing removed the dirt, debris, and seeds from the construction equipment. Rewash the construction equipment as necessary or as directed.

171.07 Acceptance. Weed prevention will be evaluated under Subsection 106.02.

Measurement

171.08 Do not measure weed prevention for payment.

Payment

171.09 Include all costs associated with the Section 171-Weed Prevention in the unit price for Section 151-Mobilization.

301 – Untreated Aggregate Courses

301.00_nat_us_03_03_2005

301 Title Change.

Change the title to: Section 301 Aggregate Courses

301.01_nat_us_03_03_2005

301.01 Work.

Add the following:

Work includes producing aggregate by pit-run, grid rolling, screening, or crushing methods, or placing Government-furnished aggregate. Work may include additive mineral filler, or binder.

301.02_nat_us_05_16_2005

301.02 Material.

Add the following:

Bentonite	725.30
Calcium Chloride Flake	725.02
Lignon Sulfonate	725.20
Magnesium Chloride Brine or Calcium Chloride Liquid	725.02

301.03_nat_us_02_28_2013

301.03 General.

Add the following:

Written approval of the roadbed is required before placing aggregate.

For pit run or grid-rolled material, furnish material smaller than the maximum size. No gradation other than maximum size will be required for pit-run or grid-rolled material. For grid rolling, use all suitable material that can be reduced to maximum size. After processing on the road, remove all oversize material from the road and dispose of it as directed by the CO.

Provide additives or binder, if required, at the proportions specified.

Develop and use Government furnished sources according to Section 105.

If the aggregate is produced and stockpiled before placement, handle and stockpiled according to Section 320. Establish stockpile sites at locations approved. Clear and grub stockpile sites according to Section 201.

301.04 Mixing and Spreading.

Delete the first sentence of the first paragraph and add the following:

Ensure that aggregate and any required additives, water, mineral filler, and binder are mixed by the specified method except, if crushed aggregate products are being produced and mineral filler, binder, or additives are required, uniformly blend following crushing. Control additive proportions to 0.5 percent dry weight.

(a) Stationary Plant Method. Mix the aggregate with other required materials in an approved mixer. Add water during the mixing operation in the amount necessary to provide the moisture content for compacting to the specified density. After mixing, transport the aggregate to the jobsite while it contains the proper moisture content, and place it on the roadbed or base course using an aggregate spreader.

(b) Travel Plant Method. After placing the aggregate for each layer with an aggregate spreader or windrow-sizing device, uniformly mix it with other required materials using a traveling mixing plant. During mixing, add water to provide the necessary moisture content for compacting.

(c) Road Mix Method. After placing the aggregate for each layer, mix it with other required materials at the required moisture content until the mixture is uniform throughout. Mix aggregate, water, and all other materials until a uniform distribution is obtained.

Spread the aggregate in a uniform layer, with no segregation of size, and to a loose depth that will provide the required compacted thickness.

When placing aggregate over geotextile, place aggregate in a single lift to the full depth specified.

Route and distribute hauling and leveling equipment over the width and length of each layer.

301.05_nat_us_05_17_2005

301.05 Compacting

Delete and replace with the following:

Compact each layer full width. Roll from the sides to the center, parallel to the centerline of the road. Along curbs, headers, walls, and all places not accessible to the roller, compact the material with approved tampers or compactors.

Compact the aggregate using one of the following methods as specified:

Compaction A. Operating spreading and hauling equipment over the full width of the travelway.

Compaction B. Operate rollers and compact as specified in Subsection 204.11(a)(1).

Compaction C. Moisten or dry the aggregate to a uniform moisture content between 5 and 7 percent based on total dry weight of the mixture. Operate rollers and compact as specified in Subsection 204.11(a)(1).

Compaction D. Compact to a density of at least 95 percent of the maximum density, as determined by AASHTO T 99, method C or D.

Compaction E. Compact to a density of at least 96 percent of the maximum density, as determined by the Modified Marshall Hammer Compaction Method (available upon request from USDA Forest Service, Regional Materials Engineering Center, P.O. Box 7669, Missoula, MT 59807).

Compaction F. Compact to a density of at least 95 per-cent of the maximum density, as determined by AASHTO T 180, method C or D.

Compaction G. Compact to a density of at least 100 percent of the maximum density as determined by the Modified Marshall Hammer Compaction Method (available upon request from USDA Forest Service, Regional Materials Engineering Center, P.O. Box 7669, Missoula, MT 59807).

For all compaction methods, blade the surface of each layer during the compaction operations to remove irregularities and produce a smooth, even surface. When a density requirement is specified, determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

301.06_nat_us_03_03_2005

301.06 Surface Tolerance.

Add the following:

Thickness and Width requirements:

The maximum variation from the compacted specified thickness is ½ inch. The compacted thickness is not consistently above or below the specified thickness and the average thickness of 4 random measurements for any ½ mile of road segment is within + ¼ inch of the specified thickness.

The maximum variation from the specified width will not exceed +12 inches at any point. The compacted width is not consistently above the specified width and the average of any four random measurements along any ½ mile of road segment is within +4 inches of the specified width.

301.08_nat_us_03_30_2005

301.08(b) Plasticity Index.

Add the following to the first sentence:

“and under 703.05(c)(1)”.

Table 301-1: Add the following:

Table 301-1—Acceptance Sampling and Testing Requirements.

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Subbase & Base Courses L, M, N, O, P, Q, R	Measured and tested conformance (Subsection 106.04)	Plastic Limit	-	AASHTO T 90	1 per each 1,000 T	From the windrow or roadbed after processing	Yes	4 Hours

Table 301-1—Acceptance Sampling and Testing Requirements.

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Aggregate Width	Measured and tested conformance (Subsection 106.04)	Width	-	-	4 per each 0.5 mi	Roadbed after processing	-	4 Hours
Aggregate Thickness	Measured and tested conformance (Subsection 106.04)	Thickness	-	-	4 per each 0.5 mi	Roadbed after processing	-	4 Hours
Additive	Measured and tested conformance (Subsection 106.04)	Amount of Additive	-	-	1 per each 1,000 T	From the windrow or roadbed after processing	No	4 Hours

301.09 Measurement.

Replace the second paragraph with the following:

Measure aggregate by cubic yard compacted in place when payment is by contract quantities.

Table 301-1 Field Density Requirements.

Table 301-1: Delete laboratory and field density requirements for base, subbase, and surfacing and replace with the following:

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Base and Subbase	Measured and tested conformance (Subsection 106.04)	Moisture Density	---					
		Method C	---	AASHTO T 99	1 per type and source of material	Source of material	Yes	Before using in work
			---		“	“	“	“
		Method D	---	AASHTO T 180	“	“	“	“
			---		“	“	“	“
		Compaction	---					
		Method C, D	---	AASHTO T 310 or other approved procedures	1 per 500 t	In-place	---	Before placing the next layer
Surfacing	Measured and tested conformance (Subsection 106.04)	Moisture Density						
			---		“	“	“	Before using in work
		Method D	---	AASHTO T 180	“	“	“	“
			---		“	“	“	“
		Compaction						
				Method C, D	---	AASHTO T 310 or other approved procedures	1 per 500 t	In-place

301.10 Payment

Delete the following:

adjusted according to Subsection 106.05

303 - Road Reconditioning

303.01_nat_us_03_02_2005

303.01 Work.

Delete and add the following:

This work consists of reconditioning ditches, shoulders, roadbeds, cattleguards, asphalt surfaces, and aggregate surfaces

703 - Aggregate

703.05_nat_us_08_14_2009

Delete 703.05 and replace with the following:

703.05 Subbase, Base, Surface Course, and Screened Aggregate.

(a) Subbase or base aggregate. Furnish hard, durable particles or fragments of crushed stone, crushed slag, or crushed gravel conforming the following:

(1) Gradation	Table 703-2
(2) Liquid limit, AASHTO T 89	25 max.
(3) Plastic limit, AASHTO T 90	Nonplastic
(4) Los Angeles abrasion, AASHTO T 96	40% max.
(5) Sodium sulfate soundness loss (5 cycles), AASHTO T 104	12% max.
(6) Durability index (coarse), AASHTO T 210	35 min.
(7) Durability index (fine), AASHTO T 210	35 min.
(8) Fractured faces, ASTM D 5821	50% min.
(9) Free from organic matter and lumps or balls of clay	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary. Fine aggregate, material passing the No. 4 sieve, shall consist of natural or crushed sand and fine mineral particles.

(b) Surface course aggregate. Furnish hard, durable particles or fragments of crushed stone, crushed slag, or crushed gravel conforming the following:

(1) Gradation	Table 703-3
(2) Liquid limit, AASHTO T 89	35 max.
(3) Plastic Index, AASHTO T 90	
a) If the percent passing the No. 200 sieve is less than 12%	2 to 9
b) If the percent passing the No. 200 sieve is greater than 12%	Less than 2
(4) Los Angeles abrasion, AASHTO T 96	40% max.
(5) Sodium sulfate soundness loss (5 cycles), AASHTO T 104	12% max.
(6) Durability index (coarse), AASHTO T 210	35 min.
(7) Durability index (fine), AASHTO T 210	35 min.
(8) Fractured faces, ASTM D 5821	75% min.
(9) Free from organic matter and lumps or balls of clay	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Do not furnish material that contains asbestos fibers.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary. Fine aggregate, material passing the No. 4 sieve, shall consist of natural or crushed sand and fine mineral particles.

(c) Screened aggregate – Furnish hard, durable particles or fragments of stone, slag, or gravel conforming the following:

- | | |
|--|--------------|
| (1) Gradation | Table 703-16 |
| (2) Plastic Index, AASHTO T 90 | Less than 9 |
| (3) Los Angeles abrasion, AASHTO T 96 | 55% max. |
| (4) Free from organic matter and lumps or balls of clay. | |

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary.

Delete Table 703-2 and replace with the following:

**Table 703-2
Target Value Ranges for Subbase and Base Gradation
Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)**

Sieve Size	Grading Designation				
	A (Subbase)	B (Subbase)	C (Base)	D (Base)	E (Base)
2½ inch	100				
2 inch	97 – 100	100	100		
1½ inch		97 – 100			
1 inch	65 – 79 (6)		80 – 100 (6)	100	
¾ inch			64 – 94 (6)	86 – 100 (6)	100
½ inch	45 – 59 (7)				
3/8 inch			40 – 69 (6)	51 – 82 (6)	62 – 90 (6)
No. 4	28 – 42 (6)	40 – 60 (8)	31 – 54 (6)	36 – 64 (6)	36 – 74 (6)
No. 40	9 – 17 (4)			12 – 26 (4)	12 – 26 (4)
No. 200	4.0 – 8.0 (3)	4.0 – 12.0 (4)	4.0 – 7.0 (3)	4.0 – 7.0 (3)	4.0 – 7.0 (3)

() The value in the parentheses is the allowable deviation (±) from the target values.

Delete Table 703-3 and replace with the following:

**Table 703-3
Target Value Ranges for Surface Gradation
Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)**

Sieve Size	Grading Designation							
	F	G	H	S	T	U		
1 1/2 inch	100			100				
1 inch	97-100	100		72 - 92 (6)	100			
3/4 inch	76-89 (6)	97 - 100	97 - 100			100		
1/2 inch					71 - 91 (6)			
3/8 inch	56-68 (6)	70 - 80 (6)	80 - 92 (6)	51 - 71 (6)		71 - 90 (6)		
No. 4	43-53 (7)	51 - 63 (7)	58 - 70 (7)	36 - 53 (7)	43 - 60 (7)	50 - 68 (7)		
No. 8				26 - 40 (6)	30 - 46 (6)	34 - 51 (6)		
No. 16	23-32 (6)	28 - 39 (6)	28 - 40 (6)					
No. 40	15-23 (5)	19 - 27 (5)	16 - 26 (5)	14 - 25 (5)	16 - 28 (5)	19 - 30 (5)		
No. 200	10.0-16.0 (4)	10.0 - 16.0 (4)	9.0 - 14.0 (4)	8.0 - 15.0 (4)	8.0 - 15.0 (4)	8.0 - 15.0 (4)		

() The value in the parentheses is the allowable deviation (±) from the target values.
If the plasticity index (PI) is greater than 0, the TV range for the No. 200 sieve size is 8-12 (4).

Add Table 703-16:

Table 703-16

Gradation Requirements for Screened Aggregate

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)						
	Grading Designation						
	L	M	N	O	P	Q	R
6 inch	100	100					
4 inch			100	100			
3 inch					100	100	
2 inch							100
No. 4		15-45		15-45		15-45	

703.10_nat_us_04_11_2011

703.10(e) Flakiness Index.

Delete and replace with the following:

Flakiness Index, FLH T 508 30% max.

703.10(i) Adherent Coating.

Add the following:

Adherent coating on the aggregate, FLH T 512 0.5% max.

718.05_nat_us_08_05_2009

718.05 Aluminum Panels

Delete the third paragraph and replace with the following:

Clean, degrease and properly prepare the panels according to methods recommended by the sheeting manufacturer. Conversion coatings will conform to ASTM B-921 or ASTM B-449.

725 - Miscellaneous Material

725.01_Des_5_4_2006

725.01 Water.

725.01(c) Juvenile fish protection.

Add the following:

Any draft suction hose used by the Contractor to withdraw water from a live stream or pond located on National Forest land, shall utilize one of the following methods of screening on the inlet.

- (a) Perforated Plate: Screen openings shall not exceed $3/32$ or 0.0938 inches.
- (b) Profile Bar Screen: The narrowest dimension in the screen openings shall not exceed $5/64$ or 0.0781 inches in the narrowest direction.
- (c) Woven Wire Screen: Screen openings shall not exceed $3/32$ or 0.0938 inches in the narrow direction.

All screens or plate shall be cleaned frequently with a wire brushing, flushing, or any other acceptable method approved by the CO.

