



W = Waterbar/Cross Ditch Detail

T-839A-10B

PROFILE VIEW

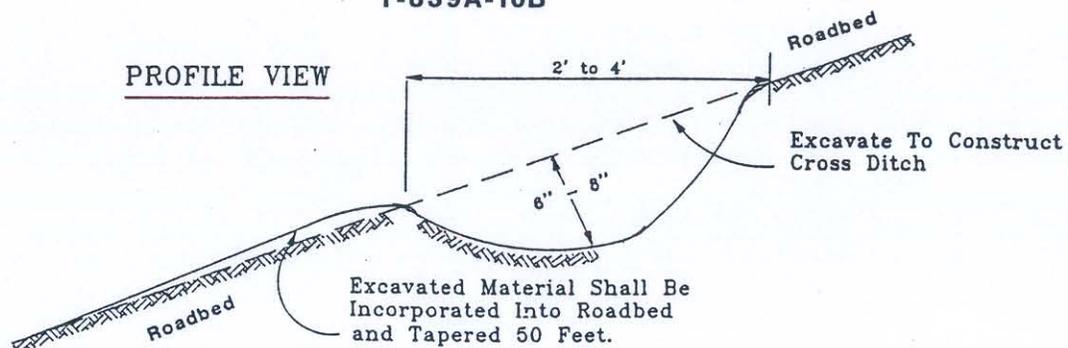

NOT TO SCALE

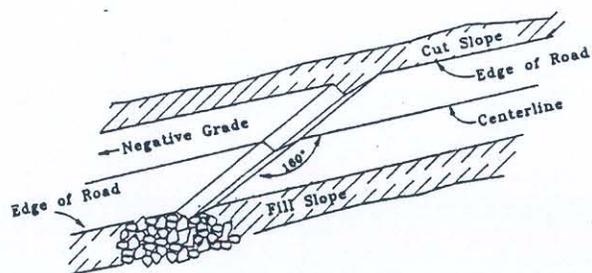


Fill slope shall be rocked to a 10' width, 1' depth, centered on the cross ditch outlet.

Treat Outlet as shown in one of these details

#1

#2

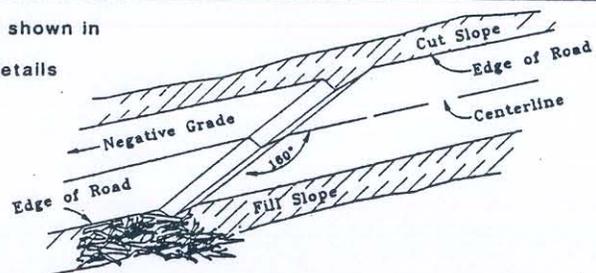

Slash shall be placed on fill slope from cross ditch to toe of fill, to reduce soil erosion. Slash not over 4'' in diameter and not more than 6' in length shall be placed as flat as possible on the fill slope. The width of the slash apron shall not be less than 15', centered on the outlet.