

A22 – List of Special Provisions

- C2.2# - Utilization and Removal of Included Products (4/03)
- C2.211# - Optional Removal of Non-Sawtimber Products (1/07)
- C2.353# - Designation by Damage Class (4/04)
- C4.211 - Downpayment (6/07)
- C4.212 - Temporary Reduction of Downpayment (8/09)
- C4.225# - Advanced Payment for Non-Sawtimber (2/09)
- C4.228# - Brush Disposal Schedule (2/09)
- C5.12# - Use of Roads by Purchaser (6/99)
- C5.316# - Snow Removal (2/02)
- C5.32# - Road Maintenance Deposit Schedule (7/01)
- C5.41# - Closure to Use by Others (3/07)
- C6.10 - Prewrite Conference (10/04)
- C6.23 - Protection of Land Survey Monuments (10/04)
- C6.310# - Salvage Cutting Schedule (5/80)
- C6.316# - Limited Operating Period (5/05)
- B6.33 - Safety Attachment - Logging And Maintenance Operations
Signing Standards (10/01)
- C6.332 - Safety (Timber Hauling) (10/04)
- C6.339 - Accident and Injury Notification (4/05)
- C6.351# - Washing Equipment. (7/07)
- C6.4# - Conduct of Logging (10/82)
- C6.6# - Erosion Prevention and Control (10/04)
- C6.661 - Current Operating Areas (10/04)
- C6.7 - Hazard Reduction and Site Preparation (3/89)
- C6.71 - Change in Slash Treatments (3/90)
- C6.801 - Scaling (Pulp Logs) (10/04)
- C6.822# - Presentation for Weight Scaling (3/07)
- C6.823 - Volume Determination (10/04)
- C6.848 - Weight Accountability for Split Pricing (10/04)
- C6.849 - Route of Haul (10/04)
- C7.2 - Normal Precautions (2/02)
- C8.66# - Use of Timber (4/04)

C2.2# - UTILIZATION AND REMOVAL OF INCLUDED PRODUCTS (4/03) Unless otherwise agreed in writing, or as specified in C2.211# - Optional Removal of Non-sawtimber Products, Purchaser is required to pay for and remove the following products described in A2 of the contract:

Sawtimber is the boles of trees meeting Sawtimber Product specifications as listed in A2 of the contract.

Non-sawtimber is the boles of trees meeting Non-sawtimber Product specifications as listed in A2 of the contract, but that do not meet the minimum piece specifications for Sawtimber Products. Non-sawtimber removal is only required in **Refer to C2.211#**. Only the volume of non-sawtimber in the cutting units listed above is included in the estimated volume shown in A2. If the purchaser and the Forest Service agree to remove non-sawtimber from cutting units other than those listed above this non-sawtimber must be measured and paid for at the rates shown in A4.

C2.211# - OPTIONAL REMOVAL OF NON-SAWTIMBER PRODUCTS (01/07) Purchaser shall fall all trees designated for cutting. Notwithstanding the requirements of B2.2, within **Cutting Unit 1**, all Non-sawtimber Products meeting utilization standards in A2 shall either be decked at the landing or removed, at the option of the Purchaser. Unless otherwise agreed, if Purchaser elects the decking option, the Non-sawtimber Products shall be limbed and decked in such a manner as to facilitate loading at a later date. Payment for this product shall be made as per C4.225. If Purchaser elects to remove this product, then payment shall be made after the product is presented for scaling.

If the Purchaser requests, and the Forest Service agrees, Non-sawtimber Products may be left in the harvest area in lieu of decking at the landing.

C2.353# - DESIGNATION BY DAMAGE CLASS. (4/04) Within Cutting Unit 1, as shown on Sale Area Map, the following criteria are used to designate trees and other products for cutting and removal:

- (a) All down trees and those trees that are visibly root sprung, meeting utilization specifications in A2 that are within the cutting unit boundaries.
- (b) Additional standing trees, or portions of trees, to be felled and removed, if any, are marked with **N/A** paint.

Cutting Unit boundaries and other trees that shall be left uncut are marked with **ORANGE** paint.

Cutting unit boundaries are marked on three (3) sides of the cutting unit boundary trees with vertical stripes of **ORANGE** paint extending from diameter breast height (DBH) upwards approximately three (3) feet. The middle stripe of paint faces the cutting unit and the other two face on line with the cutting unit boundary. In addition, each boundary tree has a horizontal stump mark painted on the downhill side of the tree at ground level. Trees used for boundary designation are not to be cut.

C4.211 - DOWNPAYMENT. (6/07) downpayment amount shown in A18 may not be applied toward any other payment required under the provisions of this contract, except damages determined pursuant to B9.4, transferred to other timber sales, or refunded until (a) stumpage value representing 25 percent of the total bid value of the timber sale has been charged and paid for, or (b) the estimated value of the unscaled timber is equal to or less than the amount of the downpayment, or (c) if 36 CFR 223.49(e) is applicable, the estimated value of the unscaled timber is equal to or less than the amount of the downpayment.

If Forest Service makes a determination that this contract should not have been included under increased downpayment requirements (36 CFR 223.49(e)), the downpayment shall be revised and applied in accordance with 36 CFR 223.49(f).

C4.212 - Temporary Reduction of Downpayment. (8/09) Notwithstanding B4.211 or C4.211, upon the Purchaser's written request Forest Service may temporarily reduce the downpayment when Purchaser's scheduled operations are delayed or interrupted for 30 or more consecutive days, or the contract term is extended for 30 or more consecutive days for any of the following reasons:

- (1) Forest Service requests or orders Purchaser to delay or interrupt operations for reasons other than breach;
- (2) Purchaser interrupts or delays scheduled operations to work on a sale designated by the Forest Service as in urgent need of harvesting; or
- (3) An adjustment of the contract term authorized upon a determination of substantial overriding public interest, including a market-related contract term addition, or an urgent removal contract term extension under 36 CFR 223.53.

When Purchaser is not cutting or removing timber under contract during a qualifying period of delay, interruption, or extension listed above the downpayment may be reduced to \$1000 or 2 percent of the downpayment amount stated in the contract, whichever is greater. The Purchaser must restore the downpayment to the full amount stated in the contract within 15 days from receipt of the bill for collection and written notice from the Contracting Officer that the basis for temporarily reducing the downpayment no longer exists. Purchaser shall not cut or remove timber on a contract where the downpayment has been temporarily reduced until the downpayment amount stated in the contract is fully restored.

C4.225 - ADVANCED PAYMENT FOR NON-SAWTIMBER (2/09) Unless agreed otherwise, within 30 days after the beginning of harvest operations on the Sale Area, Purchaser must notify the Forest Service of the decision to either remove or deck Non-sawtimber Products shown in A2, if provision C2.211# - Optional Removal of Non-sawtimber Products is included in the contract.

Unless otherwise specified in C4.228#, if Purchaser selects the option to deck these products in lieu of removal, then advance cash deposit for stumpage, plus the required slash disposal deposits for the volume of Non-sawtimber Products shown in A2 shall be billed for as a lump sum at the time that Purchaser notifies the Forest Service of the decision to deck Non-sawtimber Products. All such material shown in A2 shall be reported as cut, and charged for, on the timber sale statement of account during the month in which the billing is paid.

C4.228# - SLASH DISPOSAL DEPOSIT SCHEDULE. (2/09)

Purchaser shall make a cash deposit for slash disposal activities to be performed by the Forest Service.

Upon completion of skidding activities in each cutting unit, the Purchaser shall be billed for the amount(s) shown in the table below.

Cutting Unit Number	Required Deposit(s)
1	\$

C5.12# - USE OF ROADS BY PURCHASER. (6/99) Purchaser's use of existing roads identified on Sale Area Map by the following codes is prohibited or subject to restrictive limitations, unless agreed otherwise:

Code	Use Limitations
X	Hauling prohibited
R	Hauling restricted
U	Unsuitable for hauling prior to completion of agreed reconstruction
P	Use prohibited
A	Public use restriction
W	Regulation waiver

Roads coded A will be signed by the Forest Service to inform the public of use restrictions. Purchaser's use of roads coded R, A, or W shall be in accordance with the following restrictions:

Restricted Road List

Road Number	Road Name	Termini		Map Legend	Description of Restrictions
		From	To		
2706	Smeads Creek	Jct w/Rd #2229	Unit 1	R	All vehicles shall comply with statutory load limits unless a permit from the Forest Service and any necessary State permits are obtained prior to overload vehicle use.

C5.316# - SNOW REMOVAL. (02/02) Snow removal shall be done in a manner to preserve and protect the roads to insure safe and efficient transportation and to prevent unacceptable erosion damage to roads, streams, and adjacent lands.

A. Description. Snow removal work by Purchaser shall include:

1. Removal of snow from entire road surface width including turnouts.
2. Removal of snow slides, minor earth slides, fallen timber and boulders that obstruct normal road surface width including turnouts.
3. Maintain drainage so that the drainage system will function efficiently.

B. Performance. All items of snow removal shall be done currently as necessary to insure safe, efficient transportation. Work shall be done in accordance with the following minimum standards of performance.

1. Removal of material. All debris, except snow and ice, that is removed from the road surface and ditches shall be deposited away from stream channels at agreed locations.
2. During snow removal operations, banks shall not be undercut nor shall gravel or other selected surfacing material be bladed off the roadway surface.
3. Ditches and culverts shall be kept functional during and following roadway use.

4. Snow berms shall not be left on the road surface. Berms left on the shoulder of road shall be removed and/or drainage holes shall be opened and maintained. Drainage holes shall be spaced as required to obtain satisfactory surface drainage without discharge on erodible fills.

5. Dozers and skidders shall not be used to plow snow on system roads without written approval of Forest Service. Upon approval, dozers and skidders must be equipped with shoes or runners to keep the plow blade a minimum of **two (2)** inches above the road surface unless specifically removed from the requirements in writing.

6. Snow must not be removed to the road surface. A minimum **two (2)** inch depth must be left to protect the roadway.

7. Purchaser's damage from, or as a result of, snow removal shall be restored in a timely manner.

C5.32# – ROAD MAINTENANCE DEPOSIT SCHEDULE. (7/01) Other provisions herein notwithstanding, when Forest Service requests payment in lieu of Purchaser's performance of road maintenance, Purchaser shall make Required Deposits (16 USC 537) for current and/or deferred road maintenance. Such deposits are based on the estimated volume and distance hauled and Purchaser's commensurate use of each road listed in the Road Maintenance Plan in C5.31#.

Purchaser and Forest Service may agree in writing on adjustment of such rates. If purchaser uses roads under jurisdiction of Forest Service other than those listed in the Road Maintenance Plan, Forest Service shall establish rates commensurate with Purchaser's use of such roads.

The Required Deposits for Forest Service work in lieu of Purchaser performance and for deferred maintenance is: **\$1.27 per Ton.**

Purchaser shall make deposits for road maintenance directly to **N/A** for roads subject to the terms of a Road Maintenance Agreement that is available for inspection at the Forest Supervisor's office. Such deposits shall be at the rate of **\$N/A per N/A**

C5.41# - CLOSURE TO USE BY OTHERS. (3/07)

A. Closure of Roads During Period of Contract. Unless otherwise agreed in writing between Purchaser and Forest Service, Purchaser shall within 15 days of receipt of notice from Forest Service, install closure devices listed below and close them on roads designated "To Be Closed" on Sale Area Map and listed below to effectively block access to vehicle traffic except that constituting official use. Installation of closure devices shall follow closure details attached hereto and made a part hereof.

Official vehicle traffic shall constitute that use by Purchaser and his employees when engaged in timber sale activities. It shall also include administrative traffic by Forest Service, and other landowners for the administration of their lands. Purchaser shall close road as directed by Forest Service at the completion of daily activities or maintain closure after passage of each vehicle. Forest Service will monitor and administer closure activities.

CLOSURE DEVICES					
Road Number	Location	Furnished By	Closure Method	Closure Device Installed By	In Place
2706	Mile Marker 4.5	FS	Gate	FS	Yes – Close nights and weekends.

During the life of this contract, Purchaser shall install temporary barricades at locations designated "Temporary activity Barricade" on Sale Area Map and shown below. Temporary barricades shall be installed so that they may be readily opened by Purchaser or Forest Service for access to Sale Area in case of fire or other emergency. Official vehicle traffic shall also include administrative traffic by Forest Service and other landowners for the administration of their lands. Purchaser shall provide and post approved signs as authorized by Forest Service. Installation of Temporary Activity Barricades shall follow closure details attached hereto and made a part hereof.

During the period **10/22** to **11/27** when Purchaser's Operations are in areas otherwise closed to motorized vehicles, Purchaser shall not be permitted to hunt, transport hunters, discharge firearms or transport big game animals with vehicles within the closed areas.

TEMPORARY ACTIVITY BARRICADES

Road Number	Location	Closure Method
	N/A	

B. Closure of Roads at End of Purchaser's Use. Unless otherwise agreed in writing between Purchaser and Forest Service, upon completion of use, Purchaser shall effectively close to public use the following roads designated "To Be Closed" on Sale Area Map and listed below. Existing locking closure devices shall be closed and locked as directed by Forest Service. As an element of final road maintenance and environmental or resource protection, the designated closure shall be accomplished by using the methods required for each road as described below:

Closure Location(s)				
Road Number	Location	Closure Method	Furnished By	In Place
2706	Mile Marker 4.5	Gate	FS	Yes

C6.10 - PREWORK CONFERENCE. (10/04) Annually, prior to commencement of work, a prework conference will be held to discuss contract terms and work performance requirements. Also at this meeting such things as responsibility under OSHA, and procedures for how undesignated timber that may have to be added to the contract (including danger trees) shall be discussed and documented.

The Purchaser, or designated representative, will arrange for the meeting with the Contracting Officer.

C6.23 - PROTECTION OF LAND SURVEY MONUMENTS. (10/04) Forest Service shall appropriately designate on the ground all known survey monuments including but not limited to horizontal control stations (Triangulation Stations), vertical control stations (Bench Marks), property corner monuments, and all Public Land Survey System monuments. This shall include reference monuments, corner accessories such as bearing trees, line trees and line posts. Identifying signs shall be posted by Forest Service on two sides of each known bearing tree and each line post shall be posted with a metal sign or decal. Line trees may be cut if designated under B2.3.

In authorized clearings such as Clearcutting Units and road construction clearings, and in other instances where damage to survey monuments, corners, corner accessories and survey of property line markers is unavoidable, Forest Service shall arrange protective or perpetuative action which does not cause unnecessary delay to Purchaser.

Purchaser shall protect all known survey monuments, witness corners, reference monuments, bearing trees and line markers against avoidable destruction, obliteration or damage during Purchaser's Operations. Additional monuments or objects discovered on the area shall be promptly reported to the other party and shall also be protected. If any known monuments, corners, corner accessories, and survey or property line markers are destroyed, obliterated or damaged during Purchaser's Operations, Purchaser shall employ a registered professional land surveyor to reestablish or restore at the same location the monuments, corners, corner accessories or line markers. Such surveyors shall use procedures and monumentation that accords with the Bureau of Land Management Manual of Instructions for the Survey of the Public Lands of the United States for General Land Office surveys and any applicable State statutes concerned with land surveys. Purchaser's agent shall record such surveys in accordance with state survey statutes.

C6.310# - SALVAGE CUTTING SCHEDULE. (5/80) To accomplish special salvage objectives of this contract, Included Timber in **Cutting Unit 1** shall be cut and removed from Sale Area by **October 31, 2011** unless waived in writing by Forest Service.

C6.316# - LIMITED OPERATING PERIOD. (5/05) Except when agreed otherwise in writing, Purchaser's operations shall be limited as follows:

During the first two (2) days of the deer/elk rifle hunting season, no operations shall be permitted on roads or cutting units located behind road closures specified in C5.41# and designated "To Be Closed" on Sale Area Map.

**Attachment B6.33
10/01**

LOGGING AND MAINTENANCE OPERATIONS SIGNING STANDARDS

All signs must be manufactured & installed as specified in the FHWA "Manual on Uniform Traffic Control Devices" (MUTCD) & FS publication "Standards for Forest Service Signs & Posters"(EM 7100-15).

SIGN STANDARDS

SHAPE & COLOR: Generally, signs for logging and maintenance operations are either diamond-shaped or rectangular. All signs are **reflective orange background with black legend and border** unless shown otherwise. Handpainted, homemade signs are not legal. Fluorescent paint is not reflectorized.

SUBSTRATE: Sign substrate material may be High Density Overlay (HDO) Plywood, Aluminum, Fiberglass Reinforced Plastic, Corrugated Plastic or Roll-up Fabrics.

SIGN SIZE: Sign size is a factor of speed and MUTCD & FS standards. Where conditions of speed, volume, or special hazard require greater visibility or emphasis, larger signs should be used. Minimum sizes for the most common signs can be found in Figure 4. Refer to the EM-7100-15 for additional sign sizes.

LEGEND: All lettering shall be Series "C" alphabet, conforming to Standard Alphabets for Highway Signs. Letter size is also a function of speed - use letter size and word messages as specified in MUTCD and EM-7100-15.

SIGN PLACEMENT

Signs are to be installed in locations as agreed to in the traffic control plan. All signs are to be removed, covered, or folded when operations are not in progress or the sign message is not applicable. Signs should generally be located on the right-hand side of the roadway. When special emphasis is needed, signs may be placed on both the left and right sides of the road. Sign message shall be clearly visible to road users, mounted on posts or portable sign stands.

LATERAL CLEARANCE

From the edge of the road - 2 foot minimum, where slope limits to less than 6 feet. 6-12 foot preferred.

HEIGHT

Minimum of 7 feet, measured from the bottom of the sign to the near edge of the travelway. The height to the bottom of a supplemental sign mounted below the primary sign will be 6 feet.

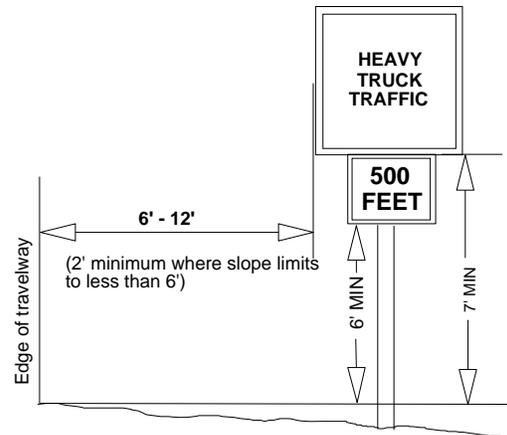


Figure 1: Sign Placement Dimensions

PLACEMENT DISTANCE

Signs must be located 100-500 feet prior to the activity, (both ends if a through road) and maintained at that distance. This distance is based on speed. Refer to Figure 2 , Table II-1, MUTCD, a portion of which is reproduced here, to determine correct placement distance.

Posted or 85 percentile speed MPH	Deceleration to listed advisory speed MPH				
	10	20	30	40	50
20	NA				
25	100				
30	150	100			
35	200	175			
40	275	250	175		
45	350	300	250		
50	425	400	325	225	
55	500	475	400	300	
60	575	550	500	400	300
65	650	625	575	500	375

Figure 2: A Portion of MUTCD TABLE II-1

SIGN SUPPORTS

POSTS: Signs are to be mounted on separate posts. Supplemental signs such as Speed Advisory plates are to be mounted on the same post as the primary sign. **Do not mount signs on trees or other signs.** Posts may be wood, metal, carsonite or similar material. Where sign supports cannot be sufficiently offset from the road edge, supports will meet breakaway standards. Single wood posts with less than 24 square inches do not require breakaway design.

TEMPORARY/PORTABLE SUPPORTS: Portable supports may be used for short-term, short-duration, and mobile conditions. MUTCD defines this time period as one work shift, 12 hours or less. All portable supports must meet MUTCD standards, including breakaway. These must be a minimum of 1 foot above the road surface or more if visibility requires it.

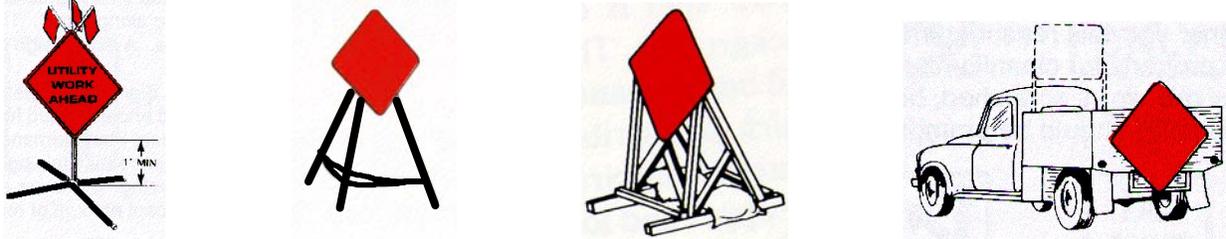


Figure 3: Examples of Temporary/Portable Supports

SIGNS

The following signs meet the intent of Timber Sale Contract Provision B6.33, SAFETY. ***This is not a complete listing of signs that may be needed.***



FG20-1-48*



FG20-2-48



FG20-3-42*



FG20-3a-42



FW22-3-30



FW20-1-30*



W21-3-30*



FW21-4a-30



FW11-7-24



W22-1-36*



FW8-6-24



FW11-9a-24



W7-3a-24*



W13-1-18**



W20-7aP-24*

* Specify Distance

** Specify Speed



BM-L-O



BM-R-O

Barricade Markers (See MUTCD for length and stripe size)

C6.332 - SAFETY (TIMBER HAULING). (10/04) Purchaser shall secure all products transported by truck with at least two chain or cable wrappers over the load, such wrappers being securely fastened to effectively contain every bolt or log in at least two places.

C6.339 – ACCIDENT AND INJURY NOTIFICATION (4/05)

Purchaser shall notify Forest Service of any lost time personal injury accident or any accident or vandalism resulting in personal property damage over \$400 in value that occurs as a result of or is associated with Purchaser's Operations.

Purchaser shall notify Forest Service within 8 hours of any personal injury accident. For vandalism and personal property accidents, Purchaser shall notify Forest Service at the same time notification is given to the state and local law enforcement authorities.

Purchaser shall take all reasonable measures after an accident or vandalism event to preserve the scene of the incident and provide information to facilitate a Forest Service investigation.

The method of notification shall be agreed to in writing at the prework conference required by provision C6.10.

C6.351 # – WASHING EQUIPMENT. (7/07) In order to prevent the spread of noxious weeds into the Sale Area, Purchaser shall be required to clean all "Off-Road Equipment" prior to entry on to the Sale Area. This cleaning shall remove all soil, plant parts, seeds, vegetative matter, or other debris that could contain or hold seeds. Only logging and construction equipment so cleaned and inspected by the Forest Service will be allowed to operate within the Sale Area. All subsequent move-ins of equipment to the Sale Area shall be treated in the same manner as the initial move in. For purposes of this provision, "Off-Road Equipment" includes all logging and construction machinery, except for log trucks, chip vans, service vehicles, water trucks, pickup trucks, cars, and similar vehicles.

Purchaser shall employ whatever cleaning methods are necessary to ensure that Off-Road Equipment is free of noxious weeds. Equipment shall be considered free of soil, seed, and other such debris when a visual inspection does not disclose such material. Disassembly of equipment components or specialized inspection tools is not required.

In order to prevent the spread of noxious weed species **N/A** the Sale Area, Purchaser shall be required to clean all off-road logging and construction equipment that operates in **N/A** prior to the equipment leaving **N/A**. Purchaser and Forest Service shall agree on methods of cleaning, locations for the cleaning, and control of off-site impacts, if any.

Unless otherwise agreed, Purchaser shall give the Forest Service at least 24 hours notice when equipment is ready for inspection. Notification will include an agreed upon location where the equipment will be available for inspection by the forest service.

New infestations of noxious weeds, of concern to Forest Service and identified by either Purchaser or Forest Service, on the Sale Area or on the haul route, shall be promptly reported to the other party. Purchaser and Forest Service shall agree on treatment methods to reduce or stop the spread of noxious weeds when new infestations are found. A current list of noxious weeds of concern to Forest Service is available at each Forest Service office.

C6.4# - CONDUCT OF LOGGING. (10/82) Unless otherwise agreed in writing, silvicultural prescriptions and land management objectives shall be conducted and accomplished by the following requirements, methods and procedures:

CUTTING UNIT	CONDUCT OF LOGGING
1	Trees shall be felled, insofar as safety permits, to angle in the direction of skidding.
1	Groundlead cable and combination loader-yarder machines shall be restricted to approved road systems.
1	No equipment allowed off of road surface.

C6.6 - EROSION PREVENTION AND CONTROL. (10/04)

Unless otherwise agreed in writing, Purchaser shall complete erosion prevention and control work required in section B6.6, including Streamcourse protection, within 15 calendar days after completion of skidding and/or yarding operations for each landing.

Designation of on the ground work shall be done as promptly as feasible unless it is agreed that the location of such work can be established without marking on the ground.

During periods of accelerated water runoff, especially during the spring runoff and periods of heavy rainfall, Purchaser shall inspect and open culverts and drainage structures, construct special cross ditches for road runoff, and take other reasonable measures needed to prevent soil erosion and siltation of streams.

When operations are active outside the Normal Operating Season defined in A16, erosion control work will be kept current and will be completed as soon as practicable.

C6.661 - CURRENT OPERATING AREAS. (10/04) Unless waived in writing by Forest Service, Purchaser shall remove accumulations of slash and logging debris in operating areas from system roads prior to the end of Normal Operating Season. Slash and logging debris in excess of three (3) feet in length and three (3) inches in diameter shall not remain on backslope, in ditches, or on traveled way, shoulders or turnouts. Debris shall be scattered downslope from the roadbed, avoiding any concentrations. When weather permits operation after Normal Operating Season, Purchaser shall keep such work on any additional disturbed areas as current as practicable.

C6.7 - HAZARD REDUCTION AND SITE PREPARATION. (3/89) Purchaser's timing of product removal, hazard reduction and site preparation shall not unnecessarily delay Forest Service slash disposal, site preparation or reforestation. Purchaser shall perform hazard reduction and site preparation work in accordance with the Hazard Reduction and Site Preparation Plan and Map which are attached hereto and made a part hereof. Such work is in addition to Required Deposits for slash disposal.

SMEADS BLOWDOWN
HAZARD REDUCTION PLAN

General:

Unless otherwise agreed in writing, Purchaser shall perform the following work described below and as shown on the Hazard Reduction and Site Preparation Map.

Forest Service and Purchaser shall jointly develop a schedule for completion of slash treatment on the various portions of the sale area.

Any activity fuel or slash generated as a result of timber harvest operations, shall be returned to a minimum of XX feet inside of the cutting unit boundary.

In the event cutting unit contains areas which are not suitable for planned treatments, alternate methods may be substituted if agreed to by the Purchaser and Forest Service.

**Slash Treatment
Methods:**

Specifications:

Landing Cleanup

Unit 1

A landing is considered a place where any logs or products are gathered for loading. Unless otherwise agreed, all slash accumulated at landings shall be piled.

Piles shall be reasonably compact and free of soil to facilitate burning. Piles will not be less than 6 feet in height. Piles shall be of a size and location which will not impair road use or result in damage to residual timber. Piles shall be located at least 10 feet from residual timber. Piles shall not be more than 30 feet long.

The piling of landings will be done by a grapple-type machine.

Clean System Roads

Unit 1

Purchaser shall dispose of all logging slash 3 inch large end diameter and 4 feet in length which is created within the clearing limits of system roads. Slash shall be piled for later burning within the right-of-way clearing unless an alternate method of slash disposal is agreed to in writing. Piles shall be reasonably compact and free of soil to facilitate burning. Piles shall be of a size and location which will not impair road use.

Yard Tops

Unit 1

Purchaser shall leave the tops attached to the top log and yard them to landings.

C6.71 - CHANGE IN SLASH TREATMENTS. (3/90) Slash treatment measures required in accordance with the Hazard Reduction and Site Preparation Plan and Map may be changed upon written agreement. The Forest Service shall determine the current cost of performing the work to be deleted and the work to be added. When the cost of work deleted exceeds the cost of work added, the agreement shall provide for a lump sum payment to the Forest Service for the amount of the difference.

C6.801 - SCALING (PULP LOGS). (10/04) A pulp log, as shown and specified in A2, shall be any log or portion of a tree, except western redcedar, dead or alive, not meeting sawlog specifications shown in A2 and containing at least 50 percent pulpable wood in terms of gross cubic volume. Normal sawlog scaling defects such as stain, shake, checks, crook, sweep, burls, knot clusters, pitch, worm holes, and firm rot are considered pulpable. Fire char is not considered pulpable. Defective logs that will break up under normal debarking operations are not considered pulpable.

Final piece, log, or load volume shall be in terms of gross cubic feet.

When pulp logs are manufactured and marketed in shorter minimum piece lengths than shown in A2, this shorter pulp log shall be considered as meeting Utilization Standards.

C6.822# - PRESENTATION FOR WEIGHT SCALING. (3/07) To facilitate the requirement of B6.82 that loads be presented so that they may be weighed in an economical and safe manner, and to aid in the accountability requirements of C6.840 or C6.848, Purchaser, unless otherwise agreed in writing, shall:

A. Utilize scales that meet the standard for commercial vehicle scales defined in the National Bureau of Standards Handbook 44, current edition.

B. Weigh all loads on scales currently certified by the State in which weighed. Scales must have a current inspection tag or seal posted which shows the date of the most recent test by the State weights and measures agency. No load shall be presented for weighing that weighs more than the certified capacity of the scales in use. Each load shall be weighed as a single unit with the gross and tare weights stamped and recorded by an automatic recording device on the scales. In addition to the gross weight and the tare weight of the load, Purchaser shall record the following information on each weight slip:

- a. Sale name
- b. Load Removal Receipt number
- c. Date and time weighed

C. Maintain load accountability from the Sale Area to point of weighing. In so doing, the load of products shall remain intact while in transit. Products accidentally lost in transit shall be promptly identified by Load Removal Receipt number and sale designation. Purchaser shall, within **24** hours, load out such lost products and present them for weighing or make other arrangements acceptable to Forest Service.

D. Clearly and legibly paint the last three digits of the Load Removal Receipt in large numbers in **YELLOW** colored paint on the back end of at least three (3) logs of every load transported from the Sale Area

C6.823 - VOLUME DETERMINATION. (10/04) Volume determination shall be based on Weight Measurement unless otherwise agreed. Products shall be weighed on certified scales at locations agreed to by Purchaser and Forest Service. The weight ticket, showing sale name, truck ticket number, date and time weighed, and the gross and tare weights, shall be attached to the Truck Ticket Scaler Receipt/Permit and placed in the location(s) as designated by the Forest Service. Upon request, Purchaser shall furnish Forest Service a copy of the scales certification.

In the event of weight scale equipment breakdown or suspension of use for other reasons, hauling will be suspended until Purchaser and Contracting Officer agree to an alternate weighing location.

If load removal receipts or weigh tickets are not provided for any reason, Forest Service shall use data from the records during the period in which loss occurred to determine weight of load(s). The weights of such load(s) shall be deemed equal to the load with the heaviest net weight presented during the payment period in which the loss occurred.

Payment for lost products may not be required if Forest Service determines that the weight of such lost products involved is small and justified by existing conditions.

C6.848 - WEIGHT ACCOUNTABILITY FOR SPLIT PRICING. (10/04)

Products sold on a basis other than single price for all products shall be accounted for as follows:

A. Requirements Applicable to Purchaser Accountability Obligations

a. Where Purchaser's product accountability responsibilities are concerned, all operations performed by Purchaser's employees, agents, contractors, subcontractors, their employees or agents, Purchaser's obligations shall be the same as if performance is by Purchaser.

B. Requirements Applicable to Woods Receipt Ticket Book

a. Purchaser shall sort and deck separately the sawtimber and non-sawtimber products at the landing. The non-sawtimber products shall remain on the landing until released for hauling and weighing by the Sale Administrator. Forest Service will issue to Purchaser or designated representative(s) serially numbered Woods Receipt ticket books for use only on this sale. Woods Receipt ticket books whether used or unused shall be accountable property of Forest Service and shall be returned to issuing District Ranger in accordance with instructions contained on cover of each book.

The Woods Receipt tickets for the non-sawtimber products will be issued by the sale administrator as needed to haul these products and are accountable property of the Forest Service. The non-sawtimber products will not be hauled until inspected and released by the sale administrator.

b. Purchaser shall require:

1. All receipts be filled out in ink by an individual named in writing other than the truck driver and be attached to load before products are hauled from immediate vicinity of or adjacent to location where loading is done showing date loaded, brand, sale name, and destination where products will be weighed. Receipts shall be attached in accordance with instructions on inside cover of Woods Receipt ticket book.

2. Before products are hauled, truck driver will sign legal signature in ink on Woods Receipt stub.

3. Purchaser shall assure that all used Scaler Receipts are returned to the issuing Contracting Officer or as otherwise agreed.

C. Requirements Applicable to Weight Slips

a. Purchaser shall assure that:

1. All products removed are presented for weighing at agreed to locations and that gross and tare weights are obtained on certified scales.

2. That weight slips for each load are attached to proper Scaler Receipt and deposited in accordance with procedures established by the Forest Service.

C6.849 - ROUTE OF HAUL. (10/04) Within 60 days of date Forest Service executes and returns contract and as part of the annual Operating schedule, Purchaser shall furnish Forest Service a map and a written general plan for hauling Included Timber from Sale Area. The plan shall set forth:

- A. Designated haul route(s)
- B. Designated weight scales

Forest Service written approval of the haul route(s) and weight scales is prerequisite to commencement of Purchaser's operations. The designated weight scales must be certified to be acceptable by Forest Service. The Purchaser may be required to furnish Forest Service a copy of certification upon request.

Upon advance written agreement, other haul routes may be approved. All products removed from Sale Area shall be transported over the designated routes of haul. Purchaser shall notify Forest Service when a load of products, after leaving Sale Area, will be delayed for more than 12 hours in reaching weighing location.

Purchaser shall require truck drivers to stop, if requested by the Forest Service, for accountability checks when products are in transit from Sale Area to the designated weighing location.

Locations for accountability checks shall be agreed to by Purchaser and Forest Service in advance of haul. Such locations shall be established only in areas where it is safe to stop trucks.

Forest Service will notify Purchaser of the methods to be used to alert truck drivers of an impending stop.

C7.2 - NORMAL PRECAUTIONS. (2/02) Specific fire precautionary measures are set forth below. Upon request of Forest Service, Purchaser shall permit and provide an individual to assist in periodic testing and inspection of required fire equipment. Purchaser shall promptly remedy deficiencies found through such inspecting and testing.

The following requirements shall apply during the period stated in A12 and during other such periods as specified by Forest Service.

A. Fire Extinguishers and Tools Required with Equipment. Each unit of powered equipment used in connection with this sale shall be equipped with serviceable tools and fire extinguishers acceptable to Forest Service as follows:

1. STATIONARY EQUIPMENT. Examples include yarders, log loaders, Hahn Harvester, stroke delimiters, roadside/landing based processors, whole tree chippers, rock crusher, asphalt plant, or other equipment working at fixed locations such as a landing or rock crushing site.

One - Fire extinguisher, dry chemical type of not less than 2.5-pound capacity with 4 B.C. or higher rating.

One - 5-gallon standard galvanized metal, fiber glass or rubberized backpack water container, with hand pump attached, to be filled at all times.

Weatherproofed tool box marked "FIRE ONLY," equipped with a hasp, kept sealed, and containing:

One - Axe, double bit, 3.5#

Two - Shovels (round point #0 lady or equal)

Two - Pulaskis

The tool box shall be mounted on equipment, if feasible, unless another location is agreed to in writing. The tool box shall be within 100 feet of the designated machine at all times when operating. Only one (1) tool box is required at each active fixed location site.

2. MOBILE EQUIPMENT. Examples include crawler tractors, rubber-tire skidders, soft-track skidders, forwarders, feller-bunchers, feller-processors, excavators, front-end loaders, back-hoes, scrapers, and motor graders.

One - Fire extinguisher, dry chemical type of not less than 2.5-pound capacity with a 4 B.C. or higher rating.

One - Shovel (round point #0 lady or equal). For equipping mobile equipment, an acceptable substitute is a "D-handle" round point shovel with a minimum 27-inch handle and a minimum 8- by 11-inch blade.

One - Axe, double bit, 3.5#, or one pulaski.

3. SUPPORT EQUIPMENT. Examples include trucks, low-boys, busses, pickups, panels, automobiles, service trucks, or similar equipment used in transporting logs, people, equipment, and/or materials.

One - Fire extinguisher, dry chemical type of not less than 2.5-pound capacity with 4 B.C. or higher rating

One - Shovel (round point #0 lady or equal)

One - Axe, 2# or over, 26-inch minimum length, or one pulaski

One - Bucket or similar water container (at least 1-gallon capacity)

4. POWER SAWS

One - Shovel (round point #0 lady or equal). Shovel shall be with gas containers and/or no more than 100 feet distance from where sawyer is working.

One - Fire extinguisher, containing not less than eight (8) ounces of extinguisher fluid or a dry chemical powder type of not less than one (1) pound capacity. The extinguisher shall be carried by the operator at all times.

Any fueling or refueling of a power saw shall only be done in an area which is free of or which has first been cleared of all material capable of carrying fire; such power saw shall be moved at least 10 feet from place of fueling before starting.

B. Fire Tools on Sale Area. Purchaser shall furnish and maintain in serviceable condition, in quantities and at locations to be designated by Forest Service, tool boxes, fire tools and other fire equipment to be used only for suppressing forest fires. Each tool box shall be weatherproofed and marked "TOOLS FOR FIRE ONLY" and kept sealed. These requirements are in addition to fire tool requirements for mobile, stationary, support or power saw equipment.

1. Special tool caches shall not be required when less than 20 people are employed on Sale Area, excluding logging truck drivers.

2. Operations employing more than 20 individuals on Sale Area, excluding truck drivers, shall furnish a tool cache with a minimum of one serviceable tool per person in the following configuration:

Axe, double bit, 3.5#, 10%

Shovels (round point #0 lady or equal), 45%

Pulaskis, 45%

C. Spark Arresters. Each internal combustion engine shall be provided with a spark arrester or spark arresting device approved by Forest Service. Exceptions where Forest Service may approve mufflers or other equipment in lieu of spark arresters qualified and rated under Forest Service standard 5100-1a are: (a) small multi-position engines, such as chain saws, shall meet Society of Automotive Engineers J335b standards, (b) passenger-carrying vehicles and light trucks may have baffle-type muffler with tail pipe, (c) heavy-duty trucks may have a vertical stack exhaust system with muffler, provided the exhaust stack extends above the cab of the vehicle, (d) an exhaust driven turbocharger is considered to be a satisfactory spark arrester. Internal combustion engine exhaust systems, arresters and other devices shall be properly installed and maintained.

D. Blasting. Fuse or prima cord shall not be used unless authorized in writing by Forest Service, with special precautions stated.

E. Smoking. Smoking shall not be permitted within logging operations except on surfaced or dirt roads, at landings, within closed vehicles, in camps or at other posted places. Smoking shall not be permitted while working or traveling on foot, within or through Sale Area.

F. Precautions for Stoves. Stovepipes on all temporary buildings, trailers, and tents using wood-burning stoves shall be equipped with roof jacks and serviceable spark arresters of mesh with openings no larger than 5/8 inch. All stovepipes, inside and out, shall not be closer than two (2) feet from any wood or other flammable material or one (1) foot if the combustible material is protected by a metal or asbestos shield.

G. Debris Around Buildings. The grounds around buildings, tents and other structures shall be kept free of flammable material for a distance of at least 15 feet from the wall of such structures.

H. Storage of Petroleum and Other Highly Inflammable Products. Gasoline, oil, grease, or other highly flammable material shall be stored either in a separate building or at a site where all combustible debris and vegetation is cleared away within a radius of 25 feet. Fire extinguishers and/or sand barrels may be required at such locations specified by Forest Service when unusually hazardous conditions exist.

I. Debris Burning and Warming Fires. Burning permits shall be required throughout the year for all debris burning fires. Lunch and warming fires may be allowed in fireproofed areas during periods of low fire danger as specified in the fire plan. Such fires shall not be left unattended.

J. Cable Logging. All tail blocks and corner blocks shall be of an accepted haulback design which prevents line fouling and used with line guards. Such blocks shall be located to prevent cables from rubbing against trees, snags, down logs or rock when operating.

Areas adjacent to blocks shall be cleared of flammable material within a 5-foot radius. One (1) shovel and one (1) pulaski shall be maintained within 10 feet of each block.

K. Emergency Measures. Additional measures and/or other special requirements necessary during periods of critical fire-weather conditions shall be included in the fire prevention and suppression plan.

L. Welding. Welding and use of cutting torches or cutoff saws will be permitted only in areas that have been cleared or are free of all material capable of carrying fire. Flammable debris and vegetation must be removed from within a minimum 10-foot radius of all welding and cutting operations. A shovel and a 5-gallon standard backpack water container filled and with handpump attached shall be immediately available for use in the event of a fire start.

C8.66# – USE OF TIMBER. (4/04) (a) This contract is subject to the Forest Resources Conservation and Shortage Relief Act of 1990, as amended (16 USC 620, *et seq.*).

(b) Except for **N/A** determined pursuant to public hearing to be surplus, unprocessed Included Timber shall not be exported from the United States nor used in direct or indirect substitution for unprocessed timber exported from private lands by Purchaser or any person as defined in the Act (16 USC 620e).

(c) Timber in the following form will be considered unprocessed:

(i) Trees or portions of trees or other roundwood not processed to standards and specifications suitable for end product use;

(ii) Lumber, construction timbers, or cants intended for remanufacturing not meeting standards defined in the Act (16 USC 620e); and

(iii) Aspen or other pulpwood bolts exceeding 100 inches in length.

(d) Unless otherwise agreed in writing, unprocessed Included Timber shall be delivered to a domestic processing facility and shall not be mixed with logs intended for export.

(e) Prior to award, during the life of this contract, and for a period of 3 years from Termination Date, Purchaser shall furnish to Forest Service, upon request, records showing the volume and geographic origin of unprocessed timber from private lands exported or sold for export by Purchaser or affiliates.

(f) Prior to delivering unprocessed Included Timber to another party, Purchaser shall require each buyer, exchangee, or recipient to execute an acceptable agreement that will:

(i) Identify the Federal origin of the timber;

(ii) Specify domestic processing for the timber involved;

(iii) Require the execution of such agreements between the parties to any subsequent transactions involving the timber;

(iv) Require that all hammer brands and/or yellow paint must remain on logs until they are either legally exported or domestically processed, whichever is applicable; and

(v) Otherwise comply with the requirements of the Act (16 USC 620d).

(g) No later than 10 days following the execution of any such agreement between Purchaser and another party, Purchaser shall furnish to Forest Service a copy of each such agreement. Purchaser shall retain, for 3 years from Termination Date, the records of all sales, exchanges, or dispositions of all Included Timber.

(h) Upon request, all records dealing with origin and disposition of Included Timber shall be made available to Contracting Officer.

(i) For breach of this Section, Forest Service may terminate this contract and take such other action as may be provided by statute or regulation, including the imposition of penalties. When terminated by Forest Service under this Section, Forest Service will not be liable for any Claim submitted by Purchaser relating to the termination.