



ROOF PLAN VIEW


NOTE:
 FEATURES AND DIMENSIONS SHOWN ARE APPROXIMATE,
 CONTRACTOR SHALL VERIFY EXACT DIMENSIONS AND ALL
 FEATURES (I.E. VENTS, CHIMNEYS ETC.)

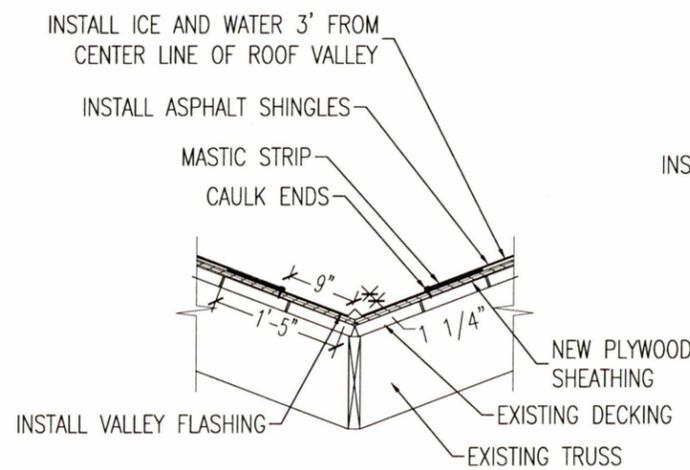


ROOF VALLEY DETAIL

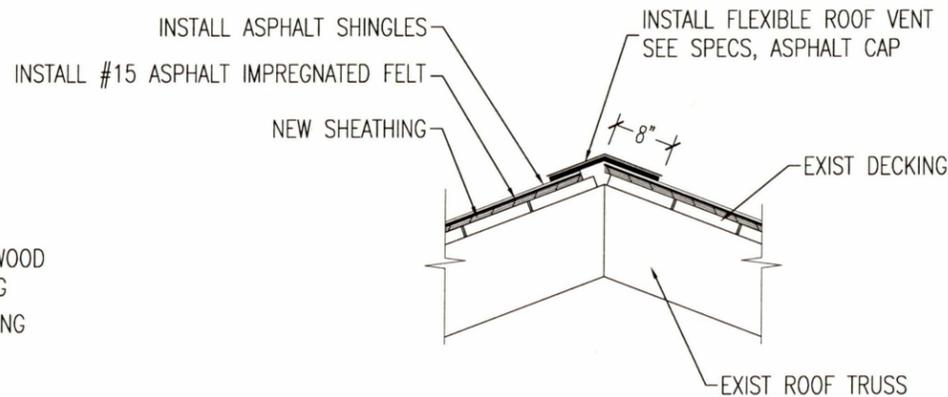

RIDGE VENT DETAIL

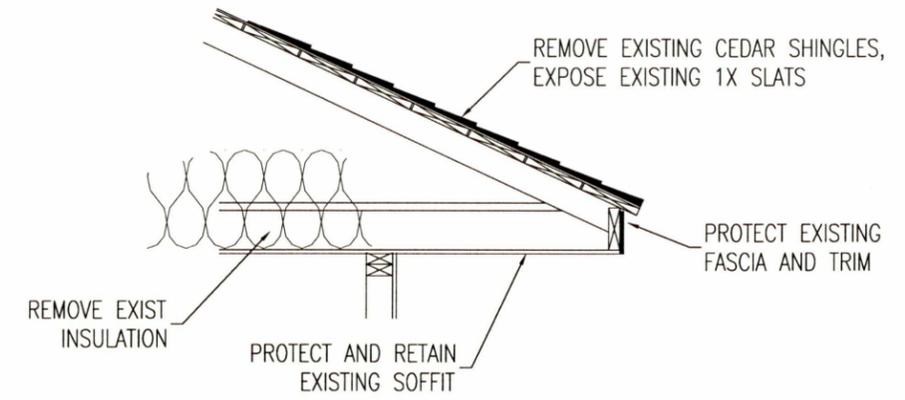

ROOF EDGE DEMO

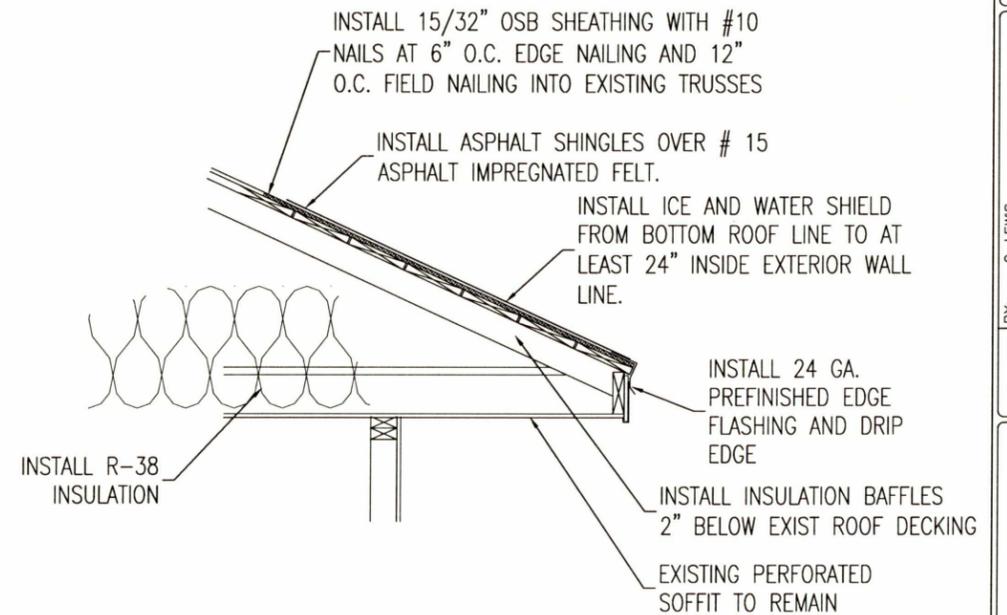

NEW ROOF EDGE

- NOTES:
1. CONTRACTOR SHALL REMOVE EXISTING CEDAR SHAKES TO THE EXISTING 1x ROOF DECKING, AND INSTALL NEW 15/32" OSB SHEATHING OVER ENTIRE ROOF.
 2. EXISTING FASCIA TRIM SHALL BE LEFT IN PLACE.
 3. COVER ENTIRE ROOF WITH #15 ASPHALT IMPREGNATED FELT, ATTACHED PER MANUF. RECOMMENDATIONS.
 4. INSTALL ICE AND WATER SHIELD AT ROOF EDGES AND IN VALLEYS AS SHOWN IN DETAILS AND PLANS, AS PER SPEC.
 5. INSTALL NEW ASPHALT SHINGLES OVER ENTIRE ROOF SURFACE PER SPECIFICATIONS.
 6. INSTALL NEW FLASHINGS AROUND ALL ROOF PENETRATIONS, (I.E. CHIMNEY, PLUMBING, HVAC STACKS ETC.)
 7. INSTALL RIDGE VENT ALONG HORIZONTAL RIDGE LINES, INSTALL ASPHALT RIDGE CAP ALONG ALL RIDGES.

DESIGN	BY: C. LEWIS	DATE: 11/12/17
DRAWING	CHECK: D. JEPPISEN	
APPROVED:	BY: C. LEWIS	
	CHECK: D. JEPPISEN	
	FOREST ENGINEER	