

TRAFFIC CONTROL PLAN AND SPECIFICATIONS PURSUANT TO G.3.3 SAFETY

Unless otherwise agreed, the following measures are required to provide adequate warning of hazards for users of roads and trails adjacent to Contractor's Operations.

Part I. Signing and Other Warning Methods:

(a) Signs. The following signs are required when Contractor's Operations are in progress adjacent to or on Forest Service controlled roads and trails:

MINIMUM SIZE AND LEGEND	LETTER	MINIMUM SHAPE	SIZE AND	AND WHEN AND WHERE REQUIRED
1. LOGGING OPERATIONS NEXT ____ MILES (4" letters)		24" (rectangle)	36"	Min. 100 ft. outside of any continuous work areas, on roads listed in K-F.3.1# and trails listed in Part II.
2. LOGGING OPERATIONS (3" letters)		24" (diamond)	24"	To be used in conjunction with "Logging Operations Next ____ Miles" and where work area is not continuous.
3. FOR LOGGING USE ONLY (3" letters)		24" (diamond)	24"	Required where roads listed in K-F.3.1# and temporary roads intersect with K-F.3.1# roads. Install a cross ditch to discourage use when sign is covered or removed for extended periods.
4. TRUCKS (4" letters)		24" (diamond)	24"	At critical intersections on roads listed in K-F.3.1# when traffic is heavy or otherwise exceeds volumes stated in Part II below. Remove or cover when the sign is not applicable.
5. END LOGGING OPERATIONS (4" letters)		24" (rectangle)	36"	Use in conjunction with "Logging Operations Next ____ Miles" and "Logging Operations."
6. TREE FELLING AHEAD (3" letters)		24" (diamond)	24"	Required 200 feet in advance of danger area where timber is being felled adjacent to all roads, including temporary roads, and trails.
7. ROAD MACHINERY AHEAD (3" letters)		24" (diamond)	24"	Required at least 200 feet in advance of Contractor road maintenance operations on roads listed in Schedule K-F.3.1#.

TRAFFIC CONTROL PLAN AND SPECIFICATIONS - G.3.3 Safety (continued)

All signs shall meet requirements as specified in Parts I and VI of the Manual of Uniform Traffic Control Devices (MUTCD).

Sign borders and lettering shall be black. Borders are 1/2 inch wide, inset 1/2 inch from outside edge of sign. All sign backgrounds shall be orange, except signs #1 and 5 which shall be reflectorized orange.

Signs shall be installed on posts, with a 5 foot minimum ground clearance, or on temporary supports complying with MUTCD standards.

All signs are to be removed or covered when operations are interrupted for seasonal nonuse or other extended periods.

Contractor shall furnish flag personnel and advance warning signs when cable or helicopter logging above roads or trails, felling adjacent to roads or trails, where logs being bucked may roll into roads or trails, and in areas where fallout from blasting may occur. On roads listed in K-F.3.1# and temporary roads, Contractor may temporarily block the road in lieu of furnishing flag personnel.

(b) Barricades. On roads listed in K-F.3.1#, if Contractor's Operations cause the traveled way or road shoulders to be constricted overnight, or longer, by such obstructions as decked logs, parked equipment, or piled slash, Contractor shall place barricades on both sides of the encroaching obstruction to safely channel traffic around such obstructions. Barricades shall remain in place until the obstruction is removed.

Barricades shall be Type II and meet specifications in MUTCD, Part VI. Barricades must be at least 3 feet high. Rails must be at least 2 feet long. Striping shall be alternating orange and white, sloping at a 45 degree angle, and reflectorized. For rails 2 feet to 3 feet long, striping shall be 4 inches wide. For rails longer than 3 feet, striping shall be 6 inches wide. Two rails, 8-12 inches in width, must face each direction.

Barricades shall be equipped with warning lights which shall be Type A low intensity flashing and shall be maintained so as to be capable of being visible on a clear night from a distance of 3,000 feet.

(c) Other Traffic Control Methods. The posting of CB channel signs may be authorized.

On roads listed in K-F.3.1#, Contractor may be authorized to install temporary gates, barricades (except cables), or natural barriers. The devices must be installed with the necessary hazard markers, be reasonably passable by Forest Service, and be removed prior to acceptance of the subdivision being served by the road.

TRAFFIC CONTROL PLAN AND SPECIFICATIONS - G.3.3 Safety
(continued)

Part II. Specific Requirements:

There are no additional requirements.

Contractor and Forest Service agree to the above stated requirements of the Traffic Control Plan:

Name

Name

Title

Title

Date

Date

K-C.1.1# - TIMBER SUBJECT TO AGREEMENT (09/2004)

In addition, there is within Contract Area an unestimated quantity of:

Species	Product
<hr/>	
Douglas-fir and Other Species	Grn Bio Cv

that shall be Included Timber upon written agreement.

K-C.3.5.5# - DESIGNATION BY PRESCRIPTION (09/2004)

Within Subdivision(s) or cutting unit(s) 1, 2, 2A, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 and 14, as shown on Contract Area Map, the following criteria shall be used by Contractor to designate trees and other products for cutting and removal. Contractor shall Mark leave trees with Contractor's non-tracer N/A paint. Forest Service shall inspect and approve Marking prior to cutting.

- (a) see attached table 1.
- (b) Additional trees to be cut, if any, are Marked by Forest Service with green tracer paint.
- (c) Cutting unit boundaries and other trees that shall be left uncut are Marked by Forest Service with orange tracer paint.

K-C.3.5.7# - INDIVIDUAL TREE DESIGNATION (OPTION 1) (06/2008)

All Douglas-fir in Subdivision 6B which meet the minimum tree diameter stated in A.2 are designated for cutting. Additional timber to be cut, if any, will be designated for cutting in accordance with C.3.7.

Leave trees, Marked with orange tracer paint slashes at breast height and below stump height, or identified by, N/A, are not to be cut, unless designated by the Forest Service.

K-D.4.7# - ABNORMAL DELAY (05/2005)

Unless otherwise agreed, felled timber meeting Utilization Standards shall be removed by Contractor pursuant to C.2 and shall be presented for Scaling within the time period indicated in the following removal schedule. The number of days shown are consecutive calendar days.

Failure to remove and present such timber for Scaling within the required time limits will be considered abnormal delay, subject to D.4.7.

See attached removal schedule.

TABLE I PRESCRIPTION PURSUANT TO K-C.3.5.5# - DESIGNATION BY PRESCRIPTION. (9/2004)

Table 1 - Prescription

Subdivision Number	Designated Cut Tree Species	Average Leave Trees per Acre	Average Spacing Between Leave Trees (Feet)	Acceptable Range in Spacing Between Trees (Feet)
2A,6,9	Douglas-fir	45	31	16-45
14	Douglas-fir	50	29	15-43
4,10,12	Douglas-fir	55	28	14-42
1,7,11,13	Douglas-fir	60	27	14-40
3	Douglas-fir	65	26	13-39
2	Douglas-fir	70	25	13-37
5,8	Douglas-fir	75	24	12-36

Use the average spacing figures listed in Table 1 as a "general" guideline in achieving the average number of desired leave trees per acre. Actual leave tree spacing can vary by as much as $\pm 50\%$ as shown in column 5 above to best achieve the specific prescription criteria explained below. *See Prescription Criteria #7 and #8 below for Big Leaf maple release and gap creation.

Prescription Criteria:

1. Designated cut tree species exceeding 35.0 inches DBH shall not be cut, unless otherwise agreed. Trees needing to be cut for operational purposes shall be left.
2. Leave the largest and most vigorous live trees. Accomplish this by varying the leave tree spacing by as much as 50%. Clumping of the larger codominant trees is desirable, but be sure to widen the spacing elsewhere to ensure that the average number of leave trees per acre (TPA) is maintained. Do not include Big Leaf maple release areas and gap areas in the leave TPA count.
3. Include as leave trees up to 5 trees/acre that have multiple tops and/or larger than normal branches. These leave trees shall be recruited from the largest trees available.
4. To facilitate harvest operations, all tree species are designated cut trees within the width of approved yarding corridors and skid roads.
5. Outside of approved yarding corridors and skid trails, all western hemlock and western red cedar trees shall be left and will be counted as leave trees if their diameters at breast height are 12 inches or greater.
6. Outside of approved yarding corridors and skid trails, all hardwoods, Sitka spruce, and dead trees shall be retained but not counted to achieve the desired average leave trees shown in Table 1.
7. Whenever trees are cut with visible infection stain from *Phellinus weirii* during the harvest felling operations, those stumps will be marked as per K-G.4.1.7, Treatment of Stumps, in the Contract.
8. All Big Leaf maples are required to be left standing unless otherwise agreed or required to be cut for safety or operational reasons. An average of two of the largest and most vigorous live Big Leaf maple trees per acre exceeding 6.0 inches DBH shall have all designated tree species shown in Table 1 cut within 37 feet horizontal distance. Trees released in this manner shall occur at random over the entire cutting area where the Big Leaf maple is found. Avoid overlapping the Big

Leaf maple release areas. If Big Leaf maple are not present in the subdivision this requirement will be waived. Avoid releasing Big Leaf Maple located within 37 feet of the boundary.

9. All designated cut tree species shown in Table 1 above shall be cut within the specified distance of any pink marked leave tree. The specified distance for subdivisions **1, 3, 8, 9, 11 and 13** is **118 feet** to create **one** acre "gaps". The specified distance for subdivisions **2, 2A, and 14** is **83 feet** to create **half** acre "gaps". The leave trees are marked with yellow ribbon, tags and a pink paint band at diameter breast height and stump mark on the downhill side of the tree.

Table 2 provides the average desired leave trees per 1/10th acre plot.

Table 2

Average Leave Trees per Acre	Average Leave Trees per 1/10 th Acre Plot
45	4.5
50	5.0
55	5.5
60	6.0
65	6.5
70	7.0
75	7.5

REMOVAL SCHEDULE PURSUANT TO K-D.4.7# - ABNORMAL DELAY. (5/2005)

REMOVAL SCHEDULE

<u>Included Timber</u>	<u>Time Limits</u>
All.	180 days months after felling is started.
All timber decked during construction clearing.	180 days after felling on each Specified Road constructed by Contractor is initiated.
Timber decked during road construction.	180 days after Forest Service authorizes Contractor to use roads pursuant to F.2.

K-E.2.1.5 - DEPOSITS WHEN PAYMENT GUARANTEED (05/2010)

To the extent payment guarantee is provided under E.3, requirements for advance cash deposits under E.2.1.2 shall be waived for the value of Included Timber removed except for:

- (a) Base Rates,
- (b) associated charges, and
- (c) the value of Included Timber exceeding the sum of stewardship credits that have not been established under E.2.2 for mandatory stewardship projects listed in A.4.3 plus optional stewardship projects listed in A.4.3 authorized by Contracting Officer.

Charges for (a), (b) and (c) shall be waived for not more than a monthly billing period, subject to the provisions of E.4.

K-E.2.2 - CHANGES IN STEWARDSHIP CREDITS (06/2008)

The Contracting Officer may at any time, by written order, make changes within the general scope of this contract in any one or more of the following:

- (1) Specifications for Stewardship Projects listed in K-G.9#.
- (2) Quantities of Stewardship Projects listed in A.4.3.
- (3) Prices for Stewardship Projects listed in A.4.3.
- (4) Place of performance of the Stewardship Projects as shown on the Contract Area Map.

In addition, by written agreement, new Stewardship Projects may be added to K-G.9# and A.4.3 as long as they are within the general scope of this contract. Contract Area may be expanded to add new stewardship projects.

If a written change order causes an increase in the time required for performing any part of the work under this contract, the Contracting Officer shall make an adjustment in the Contract Termination Date and shall modify the contract accordingly.

The Contractor must assert their right to equitable adjustments under this provision within 30 days from receipt of the written order. However, if the Contracting Officer decides that the facts justify it, the Contracting Officer may receive and act upon a proposal submitted before contract closure.

If the Contractor's proposal includes the cost of property made obsolete or excess by the change, the Contracting Officer shall have the right to prescribe the manner of the disposition of the property.

Failure to agree to an adjustment under this provision shall be considered a dispute under J.2. However, nothing in this provision shall excuse the Contractor from proceeding with the contract as changed.

In addition, by written modification of the contract, new Stewardship Projects may be added to K-G.9# and A.4.3, with or without expanding the Contract Area, as long as they are within the general scope of this contract.

K-E.4 - PAYMENTS NOT RECEIVED (08/2012)

(a) Payments are due and payable on the date of issue indicated on the bill for collection. When a payment for timber cut and other charges is not received at the location designated by Forest Service by the date specified in the bill for collection, Contracting Officer will suspend all or any part of Contractor's Operations until payment or acceptable payment guarantee is received. Other charges include, but are not limited to:

- (i) Slash disposal, road maintenance, and contract scaling deposits;
- (ii) Cooperative work at rates established by specific agreement under E.2.1.8;
- (iii) Damages pursuant to J.4;
- (iv) Road use fees;
- (v) Restoration of downpayment pursuant to E.2.2;
- (vi) Periodic payments pursuant to E.2.1.3;
- (vii) Extension Deposits pursuant to E.2.1.7; and
- (viii) Other mandatory deposits.

(b) Failure to pay amounts due by the date specified in the bill for collection shall be considered a breach under J.3. The 30-day notice period prescribed therein shall begin to run as of the end of business on the date specified for receipt of payments. If the performance or payment is guaranteed by surety bond, the surety will receive a copy of the written notification of breach. Demand will be made on the surety or other institution providing the guarantee or bond instrument for immediate payment 10 days after issuance of written notification of the breach.

(c) Pursuant to the Debt Collection Improvement Act of 1996, as amended, if payment is not received by Forest Service within 15 days after the date of issue indicated on the bill for collection:

- (i) Simple interest shall be assessed at the Current Value of Funds Rate as established by the Secretary of the Treasury. Interest will begin to accrue as of the date of issue indicated on the initial bill for collection.
- (ii) Debtors will be assessed administrative charges, in addition to the delinquent amount due. Administrative charges are those additional costs incurred by the Government in processing, handling, and collecting delinquent debts.
- (iii) A penalty charge of six (6) percent per annum will be assessed on any portion of a debt delinquent more than 90 days. This penalty charge is in addition to interest and administrative charges under paragraphs (c)(i) and (c)(ii). The penalty charge shall accrue from the date of issue indicated on the bill for collection and shall be assessed on all outstanding amounts, including interest and administrative costs assessed under paragraphs (c)(i) and (c)(ii).
- (iv) Payments will be credited on the date received by the Federal Depository or Collection Officer designated on the bill for collection.

(d) Forest Service remedies for Contractor's failure to make payment for timber cut and other charges when due, except for accrual of interest, suspension of all or any part of Contractor's Operations, and administrative offset, shall be stayed for so long as:

- (i) A bona fide dispute exists as to Contractor's obligation to make such payment and
- (ii) Contractor files and prosecutes a timely Claim.

K-F.1.0.1# - TEMPORARY ROAD AND LANDING CONSTRUCTION (OPTION 1) (06/2010)

In addition to the requirements of F.1 and G.6.3, Contractor and Forest Service will agree to the design, construction, maintenance, closure, and obliteration of all Temporary Roads.

Construction of Temporary Roads in areas shown on Contract Area Map shall be in accordance with the attached plans or criteria.

Unless otherwise agreed, if Contractor's Operations require more than N/A cubic yards of rock for Temporary Roads, landings, or other temporary uses, such rock shall be obtained from commercial sources.

See attached Plans and/or Criteria.

PLANS AND/OR CRITERIA PURSUANT TO K-F.1.0.1# - TEMPORARY ROAD AND LANDING CONSTRUCTION
(OPTION 1) (06/2008)

No plans or criteria are included. Contractor is required to supply plans and/or criteria to the Forest Service prior to beginning construction work.

*Forest Service sources are not available. Approximately 660 cubic yards of rock will be needed. All rock shall be from commercial sources. All materials incorporated into work from Contractor provided sources will be "weed free". The Contracting Officer may request written confirmation of methods utilized to insure weed-free status.

K-F.1.2# - USE OF ROADS BY CONTRACTOR (09/2004)

Contractor's use of existing roads identified on Contract Area Map by the following codes is prohibited or subject to restrictive limitations, unless agreed otherwise:

Code	Use Limitations
X	Hauling prohibited
R	Hauling restricted
U	Unsuitable for hauling prior to completion of agreed reconstruction
P	Use prohibited
A	Public use restriction
W	Regulation waiver

Roads coded A will be signed by Forest Service to inform the public of use restrictions. Contractor's use of roads coded R, A, or W shall be in accordance with the following restrictions:

See Restricted Road List Table.

TABLE A PURSUANT TO K-F.1.2# - USE OF ROADS BY CONTRACTOR. (9/2004)

Restricted Road List

Road Number	Road Name	Termini		Map Legend	Description of Restrictions
		From	To		
All Roads listed in K-F.3.1# and all Temporary Roads.				R	Road use for vehicles over 26,000 pounds GVWR shall be halted when rainfall exceeds 1.0 inch in 24 hours. This suspension shall be for 24 hours after the 1.0-inch rain event. Contractor shall monitor rainfall accumulation from a Remote Automated Weather Station (RAWS) location to be agreed upon at the Pre-work Meeting.
3430000	3430	0.00	2.33	U	Unsuitable for haul prior to completion of reconstruction.
3431000	3431	0.00	2.45	U	

Title and Date of Governing Road Rules Document:
Siuslaw National Forest Road Rule
 (Commercial Road Rules)

April 2012
 (Effective Date)

K-F.1.3# - ROAD COMPLETION DATE (09/2004)

Construction of Specified Roads shall be completed no later than 10/30/2014; except for earlier construction completion dates for roads listed below:

Road Number	Road Name	Station		Completion Date
		From	To	

Completion date is binding on the party that constructs road, whether Contractor or Forest Service. Contracting Officer may modify the completion date in writing to conform to the Technical Proposal under G.3.1.1 at the request of Contractor.

When Contractor elects Forest Service construction of Specified Roads shown in contract advertisement, Forest Service may adjust construction completion date when road construction is delayed or interrupted for causes that qualify for an adjustment of the completion date of Forest Service's road construction contract. When qualifying delays or interruptions of road construction occur, Forest Service shall evaluate such occurrences and document any findings. The current status of any adjustment shall be available to Contractor on request. Promptly after the end of Normal Operating Season in which qualifying days occur, Forest Service shall give Contractor written notice of (a) number of qualifying days claimed, and (b) new construction completion dates. After all road construction is complete, Forest Service shall grant Contract Term Adjustment. Such adjustment shall be limited to road completion date delays that occurred during Normal Operating Season.

If Forest Service is responsible for road construction and the actual date of road completion is 1 year or more after the completion date stated above, Contractor may request a rate redetermination under D.3 for remaining volume. Such request must be made within 30 days of notification that road construction has been completed. Upon receipt of such request, Forest Service shall redetermine rates using standard methods in effect on the completion date of road construction. Rates to be established shall apply to all timber removed from Contract Area after the effective date of the rate redetermination.

Forest Service shall in no way be responsible for any delay or damage caused by road contractor in performing the road construction, except such delay as may be the fault or negligence of Forest Service.

When Contractor constructs Specified Roads and requests Contract Term Adjustment, completion dates shall be adjusted by number of days that qualify for such adjustment, provided such qualifying days occur before specified construction completion date. When Contractor desires to construct an alternate facility under F.2.6, Forest Service and Contractor shall agree, in writing, on a construction completion date for alternate facility. Contract Term Adjustment as noted above will apply. Completion date shall be adjusted where a Design Change or physical changes necessitate a modification of Specified Road construction work that increases the scope or magnitude of the required work.

If Contractor fails to complete construction of any or all Specified Roads by applicable completion date, as adjusted, Contract Term Extension shall not be granted.

As used in this provision, construction of a road is completed when:

(a) Contractor constructs Specified Roads and Forest Service furnishes Contractor with written notice of acceptance under G.3.6 or

(b) Forest Service constructs road and furnishes Contractor with written notice authorizing use of road.

Notwithstanding F.1, Contractor shall not use a road that Contractor has elected for Forest Service to construct, until construction is completed and Forest Service furnishes Contractor with written notice authorizing use of road.

K-F.2.1.3# - DEPOSIT FOR RECONSTRUCTION ENGINEERING SERVICES (09/2004)

Contractor shall make a cash deposit for engineering services (preconstruction and construction) provided by Forest Service for reconstruction of National Forest system roads necessary to accommodate Contractor's use under this contract, pursuant to 16 USC 537.

The total amount to be deposited by Contractor for reconstruction related engineering services to be completed by Forest Service personnel or by public works contract is \$ \$15,009.60. Contractor shall make this deposit at the end of the first full Normal Operating Season or 12 months from contract award, whichever occurs first. In the event a different deposit schedule is agreed to, such deposit shall be due within 15 days after the date of issue indicated on the initial bill for collection, pursuant to E.4.

The amount of the required deposit will be shown as an associated charge on Contractor's Integrated Resource Account. Forest Service shall retain any unexpended deposit for reconstruction related engineering services.

The deposit for reconstruction related engineering services shall be commensurate with project need and Contractor's road use. Forest Service shall complete reconstruction related engineering services on the following schedule unless a different completion schedule is agreed in writing:

Road or Facility No.	Termini	Engineering Services
From	To	Completion Date

N/A

Reconstruction related engineering services may consist of some or all of the engineering work and expense of: preparing, setting out, controlling, inspecting, and measuring the reconstruction of a National Forest system road.

K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS (09/2004)

Contractor shall maintain roads in accordance with the following Contract Road Maintenance Requirements Summary:

See Contract Road Maintenance Requirements Summary Table.

TABLE PURSUANT TO K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS. (9/2004)

Contract Road Maintenance Requirements Summary

Road	Termini		Miles	Applicable Prehaul Road Maintenance Specifications										
	From	To		T-811	T-813	T-815	T-831	T-832	T-834	T-836	T-839	T-842	T-851	T-854
3430 Seg 1	Hwy 34	MP 0.71	0.71	P	D	P	P	P	P	P		P	P	P
3430 Seg 2	MP 0.71	Unit 1	2.79	P	P		P	P	P	P		P	P	P
3430- 111	3430	Unit 3 Ldg B	1.00	P	P		P	P	P		P	P	P	P
3430- 112	3430	Spur to Ldg I	0.46	P	P		P	P	P		P	P	P	P
3431	3430	Unit 13 Ldg D	5.40	P	P		P	P	P	P		P	P	P
3431- 112	3431	MP 0.46	0.10	P	P		P	P	P		P	P	P	P
3431- 113	3431	Unit 9 Ldg C	1.00	P	P		P	P	P		P	P	P	P
3431- 114	3431	Unit 5 Ldg C	0.27	P	P		P	P	P		P	P	P	P
3431- 115	3431	Unit 14 Ldg A	1.00	P	P		P	P	P		P	P	P	P
3431- 116	3431	Unit 11 Ldg F	1.20	P	P		P	P	P		P	P	P	P
3431- 119	3431- 114	Unit 5 Ldg F	0.20	P	P		P	P	P		P	P	P	P
3210 Seg 1	LNC Rd 807	MP 3.66	3.66	P	D	P	P	P	P	P		P	P	P
3210 Seg 2	MP 3.66	Unit 13 Spur to Ldg F	1.24	P	P		P	P	P	P		P	P	P

P = Contractor Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

TABLE PURSUANT TO K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS. (9/2004)

Road	Termini		Miles	Applicable During Haul Road Maintenance Specifications										
	From	To		T-811	T-813	T-815	T-831	T-832	T-834	T-836	T-839	T-842	T-851	T-854
3430 Seg 1	Hwy 34	MP 0.71	0.71	P	D	P	P	P	P	P		P	P	P
3430 Seg 2	MP 0.71	Unit 1	2.79	P	P		P	P	P	P		P	P	P
3430- 111	3430	Unit 3 Ldg B	1.00	P	P		P	P	P		P	P	P	P
3430- 112	3430	Spur to Ldg I	0.46	P	P		P	P	P		P	P	P	P
3431	3430	Unit 13 Ldg D	5.40	P	P		P	P	P	P		P	P	P
3431- 112	3431	MP 0.46	0.10	P	P		P	P	P		P	P	P	P
3431- 113	3431	Unit 9 Ldg C	1.00	P	P		P	P	P		P	P	P	P
3431- 114	3431	Unit 5 Ldg C	0.27	P	P		P	P	P		P	P	P	P
3431- 115	3431	Unit 14 Ldg A	1.00	P	P		P	P	P		P	P	P	P
3431- 116	3431	Unit 11 Ldg F	1.20	P	P		P	P	P		P	P	P	P
3431- 119	3431- 114	Unit 5 Ldg F	0.20	P	P		P	P	P		P	P	P	P
3210 Seg 1	LNC Rd 807	MP 3.66	3.66	P	D	P	P	P	P	P		P	P	P
3210 Seg 2	MP 3.66	Unit 13 Spur to Ldg F	1.24	P	P		P	P	P	P		P	P	P

P = Contractor Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

TABLE PURSUANT TO K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS. (9/2004)

Road	Termini		Miles	Applicable Post Haul Road Maintenance Specifications										
	From	To		T-811	T-813	T-815	T-831	T-832	T-834	T-836	T-839	T-842	T-851	T-854
3430 Seg 1	Hwy 34	MP 0.71	0.71	P	D	P	P	P	P	P		P	P	P
3430 Seg 2	MP 0.71	Unit 1	2.79	P	P		P	P	P	P		P	P	P
3430- 111	3430	Unit 3 Ldg B	1.00	P	P		P	P	P		P	P	P	P
3430- 112	3430	Spur to Ldg I	0.46	P	P		P	P	P		P	P	P	P
3431	3430	Unit 13 Ldg D	5.40	P	P		P	P	P	P		P	P	P
3431- 112	3431	MP 0.46	0.10	P	P		P	P	P		P	P	P	P
3431- 113	3431	Unit 9 Ldg C	1.00	P	P		P	P	P		P	P	P	P
3431- 114	3431	Unit 5 Ldg C	0.27	P	P		P	P	P		P	P	P	P
3431- 115	3431	Unit 14 Ldg A	1.00	P	P		P	P	P		P	P	P	P
3431- 116	3431	Unit 11 Ldg F	1.20	P	P		P	P	P		P	P	P	P
3431- 119	3431- 114	Unit 5 Ldg F	0.20	P	P		P	P	P		P	P	P	P
3210 Seg 1	LNC Rd 807	MP 3.66	3.66	P	D	P	P	P	P	P		P	P	P
3210 Seg 2	MP 3.66	Unit 13 Spur to Ldg F	1.24	P	P		P	P	P	P		P	P	P

P = Contractor Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Description of work required by the above listed T-specs is shown in the following ROAD MAINTENANCE REQUIREMENTS SPECIFICATION table, and included in the Contract.

ROAD MAINTENANCE REQUIREMENTS SPECIFICATION TABLE PURSUANT TO
K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS (9/2004)

1 Road No. and Termini	2 Special Project Specifi- cation	3 Travel Way			4 Brush And Log Out	5 Surfacing	6 Dust Abatement			7 Seasonal Mainte- nance	8 Snow Removal	9 Post Haul	
		Width	X Slope	Comp			Product	Applic Rate	Width			Block	Treat
3430 Seg 1 MP 0.00 to 0.71	T-815-F1	EX	AI		4 ft R&L								
3430 Seg 2 MP 0.71 to 3.50	T-835-F12-2	EX	AI	A	4 ft R&L	280 CY gradation Q							P
3430-111	T-835-F12-2	EX	AI	A	4 ft R&L	50 CY gradation Q			W				P
3430-112	T-835-F12-1	EX	AI	A	4 ft R&L	30 CY gradation Q			W, B			P	P
3431	T-835-F12-2	EX	AI	A	4 ft R&L	540 CY gradation Q							P
3431-112	T-835-F12-1	EX	AI	A	4 ft R&L	10 CY gradation Q			W, B			P	P
3431-113	T-835-F12-1	EX	AI	A	4 ft R&L	100 CY gradation Q			W, B			P	P
3431-114	T-835-F12-1	EX	AI	A	4 ft R&L	20 CY gradation Q			W, B			P	P
3431-115	T-835-F12-1	EX	AI	A	4 ft R&L	50 CY gradation Q			W, B			P	P
3431-116	T-835-F12-1	EX	AI	A	4 ft R&L	120 CY gradation Q			W, B			P	P
3431-119	T-835-F12-1	EX	AI	A	4 ft R&L	10 CY gradation Q			W, B			P	P
3210 Seg 1 MP 0.00 to 3.66	T-815-F1	EX	AI		4 ft R&L								
3210 Seg 2 MP 3.66 to 4.90		EX	AI	A	4 ft R&L	40 CY gradation Q							
Water bars*						460 CY gradation Q							

* Waterbar rock is included to patch over bladed out existing water bars

1/ All materials incorporated into work from Contractor provided sources will be "weed free". The Contracting Officer may request written confirmation of methods utilized to insure weed-free status.

ROAD MAINTENANCE REQUIREMENTS SPECIFICATION CODES TABLE PURSUANT TO
K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS (9/2004)

Column No.	Heading	Entry	Explanation
	Any	Blank	Except as otherwise described, no entry indicates Contractor is not authorized or required to perform the work item(s).
	Any	RC	This work requirement applies only when haul of Contract related construction materials occurs.
2	Special Project Specification	Number	Entry indicates Special Project Specification which applies.
3	Travel Way	EX Numbers IS, C, OS, F, or AI A or B	Contractor shall maintain the traveled way to the width existing upon entry, or at the completion of Specified Road work. Contractor shall maintain the traveled way to the standard width indicated by the entry, plus curve widening, in accordance with Section T-811. If required, the road template shall be shaped to this width and to the designated cross slope before haul and during recurring maintenance. Cross slopes are designated as: IS (Inslope), C (Crown), OS (Outslope), F (Flat), AI (As Is). If compaction is required.
4	Brush and Log Out	Numeric & R and or L As Staked OPT H	Contractor shall remove brush for specified width on either or both the right (R) side or left (L) side of road. Limits of brushing are as staked or marked in the field. Contractor may use hand or mechanical means of brushing. Only hand brushing may be used.
5	Surfacing	Aggregate Grading D	Contractor shall place surfacing on roads listed according to the grading indicated. Contractor is to make deposits for listed road maintenance, including surface rock replacement.
6	Dust Abatement	OPT Product Abbr. EX Numbers	Product selection is Contractor's choice from those listed in Section T-812. Unless otherwise agreed, Contractor is restricted to product listed corresponding to the abbreviation shown in Section T-812; (i.e., LigS = Lignon Sulfonate) Application rates are estimated amounts. Contractor shall abate dust on the existing width Contractor shall abate dust to the width indicated by entry.
7	Seasonal Maintenance	W B	Waterbars and/or crossditching shall be required prior to expected seasonal precipitation. Entrance barriers shall be installed by Contractor prior to nonuse periods.
8	Snow Removal	TS JU Blank	Snowplowing authorized for Contractor's Operations without recreation access being provided per Section T-803 requirements. Snowplowing authorized, but must provide for recreation joint use per Section T-803 requirements. Snowplowing is not authorized. Forest Service may authorize plowing by permit when not in conflict with other uses.
9	Post Haul	P	P denotes that work is Contractor's Responsibility to perform.

K-F.3.2# - ROAD MAINTENANCE DEPOSIT SCHEDULE (09/2004)

Other provisions herein notwithstanding, when Forest Service requests payment in lieu of Contractor's performance of road maintenance, Contractor shall make Required Deposits (16 USC 537) for current and/or deferred road maintenance. Such deposits are based on the estimated volume and distance hauled and Contractor's commensurate use of each road listed in the Road Maintenance Plan in K-F.3.1#.

Contractor and Forest Service may agree in writing on adjustment of such rates. If Contractor uses roads under jurisdiction of Forest Service other than those listed in the Road Maintenance Plan, Forest Service shall establish rates commensurate with Contractor's use of such roads.

The Required Deposits for Forest Service work in lieu of Contractor performance and for deferred maintenance is: \$ \$.03 per Ton.

The following table lists who Contractor will make deposits for road maintenance to, and the rate per unit of measure of the deposit. The Road Maintenance Agreement is available for inspection at the Forest Supervisor's Office.

Deposit Made To	Rate	Unit of Measure
N/A		

K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

Unless otherwise agreed to between Contractor and Forest Service, Contractor's Operations shall be performed in accordance with the following schedule.

See attached schedule.

SCHEDULE PURSUANT TO K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

Subdivision	Operating Conditions	Purpose
R/W	<u>All ditch clean-out or brushing with ground disturbing equipment shall be restricted to July 1 through October 15.</u>	<u>2/</u>
All	Installing and removing in-stream culverts shall be restricted to July 1 through August 31.	<u>2/</u>
All	<u>All road brushing on system roads not subject to T-836, T-838, or T-839 in K-F.3.1# shall be restricted to June 1 through September 15.</u>	<u>3/</u>
All	<u>Road Construction/Reconstruction (including Temporary Roads) and landing construction shall be restricted to July 1 through October 15.</u>	<u>2/</u>
FS roads 3430 & 3431 on FS land	<u>Road Reconstruction shall be restricted to Aug 6 through October 15.</u> <u>Hourly Restrictions: Road Reconstruction that that is within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</u>	<u>1/</u> <u>1/</u>
All	<u>If included in your Technical Proposal and accepted by the Forest Service, ground based felling, yarding and machine piling is restricted to June 15 through October 15.</u>	<u>2/</u>
1	<u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</u> <u>Felling and yarding and machine piling within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</u> <u>Haul-Move-in/out: no restrictions on system roads and temporary roads to landings D,E and F; restricted to June 15 to October 15 all other temporary roads.</u>	<u>1/</u> <u>1/</u> <u>2/</u>
2	<u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</u> <u>Felling and yarding and machine piling within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</u> <u>Haul-Move-in/out: no restrictions on road 3430 and temporary roads to landings D and F; restricted to June 15 to October 15 all other temporary roads and 3430-112.</u>	<u>1/</u> <u>1/</u> <u>2/</u>
2A	<u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</u> <u>Felling and yarding and machine piling within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</u> <u>Haul-Move-in/out: Restricted to June 15 to October 15.</u>	<u>1/</u> <u>1/</u> <u>2/</u>
3	<u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.</u> <u>Felling and yarding and machine piling: no restrictions.</u> <u>Haul-Move-in/out: Restricted to June 15 to October 15.</u>	<u>1/</u> <u>2/</u>

SCHEDULE PURSUANT TO K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

4	<p><u>Hourly Restrictions:</u> All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</p> <p><u>Felling and yarding and machine piling</u> within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</p> <p><u>Haul-Move-in/out:</u> no restrictions on system roads and temporary roads to landings A,B and C; restricted to June 15 to October 15 all other temporary roads.</p>	<p><u>1/</u></p> <p><u>1/</u></p> <p><u>2/</u></p>
5	<p><u>Hourly Restrictions:</u> All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.</p> <p><u>Felling and yarding and machine piling</u> within 100 yards of mature or old growth forest* shall be restricted to September 16 through March 31.</p> <p><u>Haul-Move-in/out:</u> no restrictions on system roads; restricted to June 15 to October 15 on temporary roads.</p>	<p><u>1/</u></p> <p><u>1/</u></p> <p><u>2/</u></p>
6	<p><u>Hourly Restrictions:</u> All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.</p> <p><u>Felling and yarding and machine piling</u> within 100 yards of mature or old growth forest* shall be restricted to September 16 through March 31.</p> <p><u>Haul-Move-in/out:</u> no restrictions on system roads; restricted to June 15 to October 15 on temporary roads.</p>	<p><u>1/</u></p> <p><u>1/</u></p> <p><u>2/</u></p>
6B	<p><u>Hourly Restrictions:</u> All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</p> <p><u>Felling and yarding and machine piling</u> within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</p> <p><u>Haul-Move-in/out:</u> no restrictions on system roads; restricted to June 15 to October 15 on temporary roads.</p>	<p><u>1/</u></p> <p><u>1/</u></p> <p><u>2/</u></p>
7	<p><u>Hourly Restrictions:</u> All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</p> <p><u>Felling and yarding and machine piling</u> within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</p> <p><u>Haul-Move-in/out:</u> no restrictions.</p>	<p><u>1/</u></p> <p><u>1/</u></p>
8	<p><u>Hourly Restrictions:</u> All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.</p> <p><u>Felling and yarding and machine piling:</u> no restrictions.</p> <p><u>Haul-Move-in/out:</u> no restrictions on system roads and temporary road to landings A; restricted to June 15 to October 15 all other temporary roads.</p>	<p><u>1/</u></p> <p><u>2/</u></p>
9	<p><u>Hourly Restrictions:</u> no restrictions.</p> <p><u>Felling and yarding and machine piling:</u> no restrictions.</p> <p><u>Haul-Move-in/out:</u> no restrictions on system roads and temporary roads to landings C; restricted to June 15 to October 15 all other temporary roads.</p>	<p><u>2/</u></p>

SCHEDULE PURSUANT TO K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

10	<p><u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between July 8 and September 15 to two hours after sunrise to two hours before sunset.</u></p> <p><u>Felling and yarding and machine piling within 100 yards of mature or old growth forest* shall be restricted to July 8 through February 28.</u></p> <p><u>Haul-Move-in/out: no restrictions on system roads; restricted to June 15 to October 15 on temporary roads.</u></p>	<p><u>1/</u></p> <p><u>1/</u></p> <p><u>2/</u></p>
11	<p><u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between August 7 and September 15 to two hours after sunrise to two hours before sunset.</u></p> <p><u>Felling and yarding and machine piling within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.</u></p> <p><u>Haul-Move-in/out: Restricted to June 15 to October 15.</u></p>	<p><u>1/</u></p> <p><u>1/</u></p> <p><u>2/</u></p>
12	<p><u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between July 8 and September 15 to two hours after sunrise to two hours before sunset.</u></p> <p><u>Felling and yarding and machine piling within 100 yards of mature or old growth forest* shall be restricted to July 8 through February 28.</u></p> <p><u>Haul-Move-in/out: no restrictions on system roads.</u></p>	<p><u>1/</u></p> <p><u>1/</u></p>
13	<p><u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.</u></p> <p><u>Felling and yarding and machine piling: no restrictions.</u></p> <p><u>Haul-Move-in/out: no restrictions on system roads and temporary roads to landings C,D,F,and G; restricted to June 15 to October 15 all other temporary roads.</u></p>	<p><u>1/</u></p> <p><u>2/</u></p>
14	<p><u>Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.</u></p> <p><u>Felling and yarding and machine piling: no restrictions.</u></p> <p><u>Haul-Move-in/out: no restrictions on system roads.</u></p>	<p><u>1/</u></p>


1/ To minimize disturbance to Marbled Murrelets or Spotted owls during the nesting season that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws)

2/ To minimize streamcourse sedimentation due to wet weather operations.

3/ To maximize the effectiveness of brushing along the haul route.

* See attached map for subdivisions or portions of subdivisions that fall approximately within the 100 yards of mature or old growth forest (restricted areas).

MAP OF RESTRICTED AREAS PURSUANT TO K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

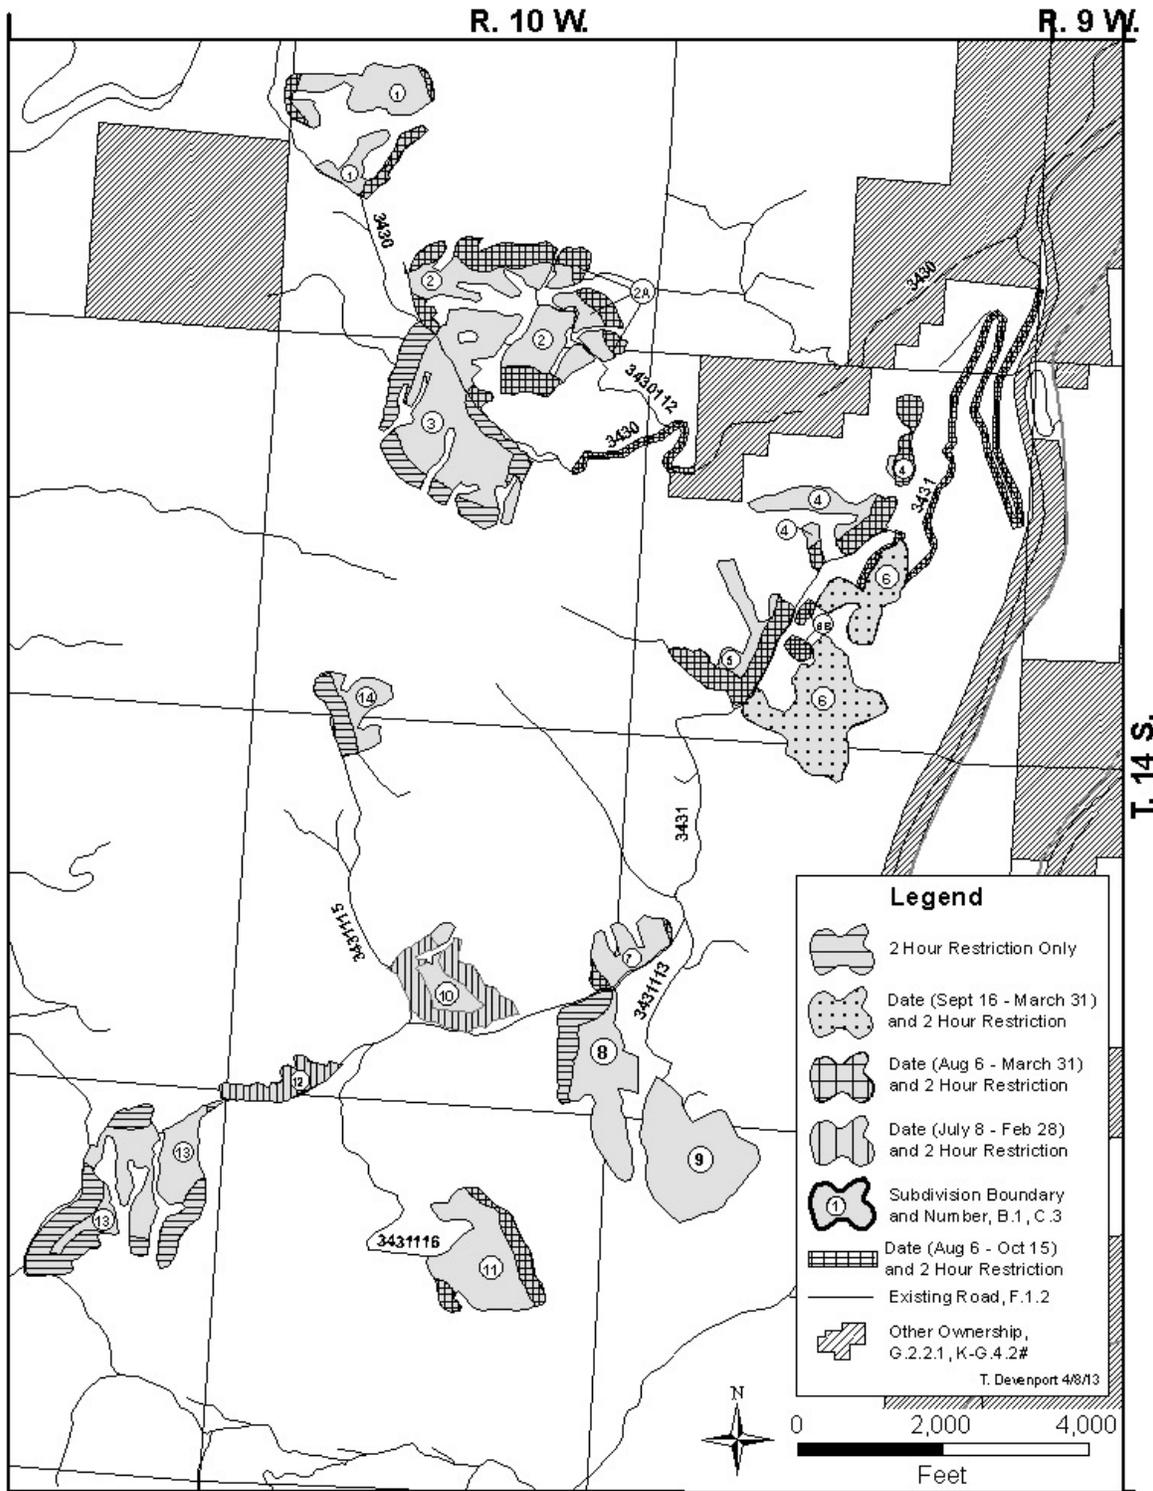

K-G.4.0.5 - ALTERNATE REMOVAL OF INCLUDED TIMBER (05/2005)

Contractor and Forest Service may agree to alternate removal requirements of Included Timber contained in A.2. Alternate removal requirements are to be set forth in an agreement signed by both Contractor and Contracting Officer. The terms of the agreement binds both parties and becomes part of the stewardship contract.

The development and execution of the agreement is based upon the determination by the Contracting Officer that removal of Included Timber is economically impractical if Contractor has no ready market for such logs in the tributary area. A tributary area is defined as the area in which the Contractor and competitors regularly deliver saw logs, or 200 miles from the Contract Area, whichever distance is greater.

The agreement for alternate removal requirements shall be executed prior to removing any timber from the Subdivisions included in the agreement. Alternate removal requirements shall apply only to whole units and not to portions of units. All material meeting alternate removal specifications shall be cut and removed to locations designated in the agreement.

Volumes of material with alternate removal requirements will be determined from the National Cruise report for the project. Contractor will be charged for the following:

- a) stumpage value at current contract rates of the alternatively removed timber;
- b) plus the cost of other work required by the Forest Service to dispose of alternatively removed material;
- c) plus the difference between the appraised transportation cost of the Sawtimber and/or Nonsawtimber material involved and the appraised transportation cost of the alternative;
- d) minus any work required to be completed by the Contractor associated with alternate removal requirements.

Charges will be debited to the Contractor's Integrated Resource Account.

Upon acceptance of the alternate removal requirements, the Subdivision will be removed from the Contract Area under G.3.6.

Title to material included in the alternate removal agreement shall remain with the Forest Service.

K-G.4.1# - SPECIFIC REQUIREMENTS (05/2005)

Notwithstanding G.4.1, G.4.1.1, G.5 and G.6.1, felling objectives shall be accomplished by the type of felling methods and equipment listed herein. Methods or equipment other than those specified may be approved. For Subdivisions shown in the following table, Contractor shall submit a cutting plan for Forest Service acceptance, prior to the start of felling operations.

See attached Table.

TABLE PURSUANT TO K-G.4.1# - SPECIFIC REQUIREMENTS (05/2005)

FELLING METHODS

Trees shall be felled away from paved roads, private property, Streamcourses, buffers, and leave areas, and to the lead of cable corridors and ground-based skid roads. Any tree that falls in a Streamcourse or a buffer shall be left in place unless otherwise approved by the Forest Service for removal.

Trees shall be directionally felled to avoid damaging live limbs greater than 4 inches in diameter on Leave Trees.

SUBDIVISIONS

All

6, 6B

FELLING EQUIPMENT

Mechanical felling machinery may be used on portions of subdivisions where ground based yarding is part of your Technical Proposal and accepted by the Forest Service.

SUBDIVISIONS

All

K-G.4.1.7 - STUMP MARKS (05/2005)

Unless otherwise agreed, Contractor shall cut two grooves in the tops of all stumps with indications of laminated root rot (*Phellinus weirii*) within 1 hour of felling.

Grooves shall be in the top of the stump, parallel to each other, 2 inches deep and 6 inches apart.

Indications of laminated root rot (*Phellinus weirii*) are:

1. Reddish-brown stain in a crescent or irregular shaped area.
2. Laminated decay that separates readily at the growth rings.

Before cutting any trees in areas shown on Contract Area Map as subject to this provision, Contractor shall obtain and furnish each faller with a copy of a guide to be used in determining which stumps need to be cut into in the manner described above. The title of the guide is "Recognizing Laminated Root Rot in Freshly-Cut Douglas-fir Stumps." It will be furnished by Forest Service. Contractor shall require fallers to carry and use the guide for the purpose intended when falling trees in areas subject to this provision.

K-G.4.2# - YARDING/SKIDDING REQUIREMENTS (05/2005)

Contractor shall submit for Forest Service approval a Yarding/Skidding Plan prior to the start of felling operations. Requirements other than those specified in the following table may be approved. When appropriate, such approval shall include adjustments in Current Contract Rates and revision of the Contract Area Map. In no such case shall the adjustments result in Current Contract Rates less than Base Rates.

Location of all skid roads and trails, tractor roads, skyline corridors, mechanized harvester trails, forwarder roads, and other log skidding facilities, shall be approved prior to their use or construction.

See attached table for requirements.

TABLE PURSUANT TO K-G.4.2# - YARDING/SKIDDING REQUIREMENTS (05/2005)

YARDING/SKIDDING REQUIREMENTS	SUBDIVISIONS
<p>If skyline yarding is included in your Technical Proposal and accepted by the Forest Service:</p> <ul style="list-style-type: none"> • Corridor locations shall be approved in advance of felling operations • Corridors will be no more than 12 feet wide and no closer than 120 feet at the far end • Keep the entire length of logs fully suspended above the ground 50 feet each side of the streamcourse during inhaul when yarding across streamcourses • No more than 20 percent of the canopy will be removed in any given 1,000-foot reach of stream when passing through riparian buffers. 	All
<p>If ground-based yarding is in your Technical Proposal and accepted by the Forest Service:</p> <ul style="list-style-type: none"> • location of skid trails shall be agreed upon prior to construction and prior to felling • Skid trails will be no more than 12 feet wide and with an average spacing of 100 feet apart • Keep one end of the log suspended during skidding <p>The ground-base machine will not be allowed on slopes greater than 30 percent. Where practical, machine shall travel on slash.</p>	All
<p>Grass Creek and Lake Creek and some tributaries to these creeks are coho salmon streams which shall not have any disturbance to these stream reaches or to the vegetation in these stream buffers (see Contract Area Map).</p>	3, 9, 11
<p>Trees with live limbs greater than 4" in diameter will remain undamaged.</p>	6, 6B
<p>If contractor chooses to tailhold on private land or land under other ownership, contractor will have to get written permission from the landowner and provide the Forest Service with a copy of the written permission.</p>	All
<p>The tops shall be severed or broken off from at least 20 percent of the felled trees prior to yarding. These severed or broken tops shall be left on site (not yarded or removed) scattered over 80 percent of the subdivision. A top is defined as that portion of the tree less than 6.0 inches DIB on the large end.</p>	All

K-G.6.0# - EROSION CONTROL AND SOIL TREATMENT BY CONTRACTOR (07/2008)

Erosion prevention and control work required by G.6, shall be completed within 15 calendar days after yarding/skidding operations related to each landing are substantially completed or after Forest Service designation on the ground of work where such designation is required hereunder. Said time limit shall be exclusive of full days lost in Contractor's Operations due to causes beyond Contractor's control. Such on the ground designation shall be done as promptly as feasible unless it is agreed that the location of such work can be established without marking on the ground. After September 15, and as long thereafter as operations continue, the work shall be done as promptly as practicable. Damage resulting from Contractor's Operations due to failure to perform required work shall be repaired by Contractor.

On slopes greater than 30 percent, erosion control measures will be done with methods other than mechanized equipment, unless otherwise agreed.

Where soil has been disturbed or displaced on Contract Area by Contractor's Operations and where measures described in G.6 will not result in satisfactory erosion control or where subsoiling is shown on Contract Area Map, the following shall be performed. If applicable, timing of the work shall be coordinated with required scarification or subsoiling.

(a) Where staked or otherwise marked on the ground by Forest Service, seed, fertilizer, and mulch will be applied as indicated in the attached seeding, fertilizing, and mulching schedule. All applications shall be current and done during the period from Septmber 15 to December 1 unless otherwise agreed to. Applications shall be done only during favorable conditions. If Contractor and Forest Service agree, seed can be applied and covered within 10 days of ground disturbance, and may be done outside the required periods.

(b) Where shown on Contract Area Map, landings, Temporary Roads and/or skidtrails/roads shall be scarified to a depth of N/A inches to provide a seedbed for grass seed, fertilizer, and mulch. Seed, fertilizer, and mulch shall be spread evenly at the rates shown in the table. When the seed, fertilizer, and mulch are applied in separate operations, the second or third operations shall be within 10 days of the first or second.

(c) Where shown on Contract Area Map, landings, Temporary Roads, and skid trails/roads used by Contractor shall be subsoiled to a minimum depth of N/A inches, except that Forest Service may agree to lesser depths. Each subsoiler shank shall be equipped with a shoe and wings which has a total width of at least 18 inches. The design of the shank and wings will be such that the treated, compacted soil is slightly lifted and well-fractured rather than plowed, mixed, or displaced. The distance between subsoiler shank passes shall not exceed 36 inches. Treated areas shall span the total width of compaction. Subsoiling shall be kept reasonably current and shall be done during Normal Operating Season unless otherwise agreed.

(d) When agreed to, Contractor may use alternate methods of erosion control.

Seed shall meet current Forest Service requirements, with the additional requirement that no seed containing any noxious weed seed in excess of established state limitations as listed in the current "State Noxious Weed Requirements Recognized in the Administration of the Federal Seed Act" publication will be used (commonly referred to as the "all states" noxious weed seed list). Seed shall be furnished separately or in mixture in standard containers clearly marked with: (1) seed name; (2) lot number; (3) net weight; (4) percentages of purity and of germination (in case of legumes, percentage of germination to include hard seed); (5) percentage of weed seed content; and (6) certification that no noxious weed seeds in excess of established state standards are present. The contractor shall furnish the Government duplicate signed copies of a certificate, signed by a Registered Seed Technologist or Seed Analyst (certified through either the Association of Official Seed Analysis or the Society of Commercial Seed Technologists), certifying that each lot of seed has been tested in accordance with the Association of Official Seed Analysts Standards within 12 months prior to date of application. This certificate shall include (1) name and address of

Contract Name: Meadow Thin STWD

laboratory, (2) date of test, (3) lot number for each kind of seed, (4) name of seed, (5) percentage of germination, (6) percentage of purity, (7) percentage of weed seed content, and (8) certification that no noxious weed seeds in excess of established state limitations are present in any kind of seed.

Legume seed shall be inoculated with approved cultures in accordance with the instructions of the manufacturer.

No seed may be applied without prior written approval by the government.

See attached application schedule.

APPLICATION SCHEDULE PURSUANT TO K-G.6.0# - EROSION CONTROL AND SOIL TREATMENT BY CONTRACTOR (05/2005)

SUBDIVISION OR SUBDIVISION NUMBER	AREAS A) SKID TRAILS B) FIRELINES C) TEMP. ROADS D) LANDINGS E) OTHER	SEED		FERTILIZER		MULCH	
		APPLICATION		APPLICATION		APPLICATION	
		SPECIES MIXTURE	LBS/AC	TYPE	LBS/AC	TYPE	LBS/AC
All	A, C, D	<u>1</u> /	22	None		None	

1/ Blue Wild Rye grass seed will be provided by the Forest Service for the Contractor to use. A co-op deposit of \$.02/Ton will be collected from the Contractor to cover the cost of culturing, growing, and harvesting seed for use in future contracts.

K-G.7 - SLASH DISPOSAL (06/2008)

As used in the following Subsections, the term "slash" is vegetative debris including, but not limited to, cull logs, blasted or pushed-out stumps, chunks, broken tops, limbs, branches, rotten wood, damaged brush, damaged or destroyed reproduction, saplings or poles, resulting from Contractor's Operations, including construction of roads or other improvements under this contract. Slash resulting from the construction of Specified Roads shall be disposed of as provided for in Section 201 of the Standard and Special Specifications and as shown in Drawings.

Any burning of slash or refuse by Contractor is subject to K-H.2.0.1.

Forest Service may enter into a written agreement with Contractor for the Contractor to remove slash from landings, subject to D.4.1. Brush disposal deposits paid by the Contractor for the Forest Service to burn landing piles will be credited to the Contractor's integrated resource account in the amount shown in the brush disposal plan, less the amount needed by the Forest Service for final cleanup of the landings following removal of the landing slash piles by the Contractor. The credit will be made following the final removal of all Included Timber, and slash piles, from the Contract Area.

K-G.7.4.2# - SLASH TREATMENT REQUIREMENTS (OPTION 2) (06/2008)

Contractor shall pile, burn, yard, construct firelines or otherwise treat slash defined in K-G.7, within designated areas. Work required of Contractor shall be in accordance with the following slash plan and specifications, and the Contract Area Map.

Unless otherwise agreed, or shown in the attached slash plan or specifications, when Included Timber is removed during Normal Operating Season, required slash work shall be completed within 30 days of removal of approximately three-quarters of the volume in the unit. When Included Timber is removed outside Normal Operating Season, required work will be completed within 30 days of the beginning of the next Normal Operating Season.

See following specifications.

SPECIFICATIONS PURSUANT TO K-G.7.4.2# - SLASH TREATMENTS REQUIREMENTS
(Option 2) (06/2008)

CONSTRUCTION SLASH. Unless otherwise agreed, all slash as defined in K-G.7 - Slash Disposal, shall be treated.

SPECIFIC DISPOSAL METHOD. Contractor shall pile or scatter all construction slash. Scattering of construction slash shall be outside the Temporary Road clearing limits without damaging trees. All logs shall be limbed. Logs and stumps shall be placed away from trees, positioned so they will not roll, and not be placed on top of one another. Piling of construction slash shall be in accordance with Machine Pile Landings Method of Treatment and Location of Piles below.

In no event will Construction Slash be buried under Temporary Road or landing embankments.

MACHINE PILE LANDINGS

1. AREA SUBJECT TO THIS PROVISION. All landings and the area within 20 feet of the perimeter of landings shall be machine piled.
2. METHOD OF TREATMENT. Unless otherwise agreed, all slash as defined in K-G.7 - Slash Disposal shall be treated as per Method a, Method b, or Method c below.
 - Method a:** All slash other than those specified pieces described in Method b below shall be placed in a compact, dirt free, uniform pile for later disposal by the Forest Service. The pieces shall be placed so that shifting or rolling will not occur and so that no material will extend over the edge of disposal areas. Piles shall be no higher than 15 feet.
 - Method b:** All pieces meeting green biomass convertible specifications and longer than 10 feet shall be placed in a separate pile(s). The pieces in the pile shall be placed parallel to each other similar to log decks, and placed where shifting and rolling will not occur. Unless otherwise agreed, these piles shall be no higher than 6 feet.
 - Method c:** All slash other than that described above in Method b shall be scattered across landings, temporary roads, skid trails, yarding corridors, or other openings in the immediate area, as designated by Forest Service Contract Administrator. Scattering shall be accomplished in a manner to avoid windrows or piling and shall not exceed a depth of 1 foot from natural forest floor or road/landing surface.
3. LOCATION OF PILES.
 - a. Piles as defined in Method a above, shall be located in the center of openings near or on the landings and as far as possible away from residual trees. Unless otherwise agreed, the base of the piles shall be no closer than 10 feet from the drip line of standing trees. Excess slash which cannot be piled as per these specifications, will be required to be hauled to a disposal site as designated by the Forest Service.
 - b. Piles as defined in Method b above, shall be located in agreed upon openings near the landing area adjacent to the road system and be located at least 10 feet away from the pile as defined in a Location of Piles "a" above. These piles can be placed no closer than one foot to standing trees.
4. TIMING OF PILES. Piling of slash shall be done concurrent with yarding on each landing, or within 10 days of completion of yarding on each landing.
5. COVERING PILES. During the construction of each pile, a 100 sq ft (10'x10') piece of 4 ml polyethylene plastic shall be placed on top of the pile when the pile is 2/3 of the way built. The remaining 1/3 of the slash shall be placed on top of the plastic. Kraft-waterproof paper or other similar product may be substituted for the 4 ml plastic.

SPECIFICATIONS PURSUANT TO K-G.7.4.2# - SLASH TREATMENTS REQUIREMENTS
(Option 2) (06/2008)

SCATTER SLASH ALONG ROADS

1. SLASH SPECIFICATION. Unless otherwise agreed, all logging slash more than 2 feet long and less than 3 inches in diameter shall be scattered when in concentrations exceeding 1 foot depth above the natural forest floor and 25 square feet in surface area. Material which is at least 3 inches in diameter on the small end must be limbed and bucked at 3 inches in diameter with the resulting slash meeting the above specification requiring scattering.
2. AREA SUBJECT TO THIS PROVISION. Slash inside Cutting Unit 13 that is within 25 feet slope distance of Road 3210 meeting above specification shall be scattered, away from the road, within the cutting unit, and outside of this area.
3. METHOD OF TREATMENT. Unless otherwise agreed, slash meeting the above slash specification shall be hand or machine scattered or incorporated into the landing piles. Any machine used for scattering shall remain on the running surface of the road at all times. Slash shall not be windrowed or piled (unless added to the landing pile). The scattered slash shall be no more than one-foot in depth, measured from mineral soil.
4. TIMING OF PILES. Scattering of slash shall be done concurrent with yarding in the unit, or within 10 days of completion of yarding.

K-G.8.1.5 - THIRD PARTY SCALING SERVICES (09/2004)

Notwithstanding the requirement for Forest Service or parties under contract to Forest Service to provide Scaling services under G.8.1, Scaling designated in A.10 shall be conducted by a third party Scaling organization approved by Forest Service. Scaling shall be done in accordance with A.9 and Contractor shall bear costs for Scaling service.

In the event third party Scaling service is suspended for causes such as strikes, termination of third party's approval to Scale National Forest logs by Forest Service, or Contractor's failure to pay third party Scaling costs, hauling operations shall be suspended until agreed alternate Scaling services are provided or service by third party is resumed.

When an approved alternate Scaling location pursuant to G.8.1.1 does not have an approved third party scaling organization as a commonly used Scaling services provider, Forest Service or parties under contract to Forest Service shall provide Scaling services at the approved alternate location. In such an event, the cost of waived third party Scaling listed in A.10 shall be charged to Integrated Resource Account.

If Forest Service and Contractor agree in writing that another party under contract to Forest Service will perform Scaling, the contract will be modified to include K-G.8.1.6 and Integrated Resource Account will be charged for such Scaling.

K-G.8.4 - USE OF PAINT BY CONTRACTOR (OPTION 1) (06/2006)

Notwithstanding G.8.4.2, use of paint by the Contractor within the Contract Area in the same color(s) used by the Forest Service in the preparation and administration of the contract will be by written approval of the Forest Service.

K-G.8.5.1 - WEIGHT OF LOST LOADS (04/13)

If weight (TON) is the unit of measure, Contractor shall present all loads for weighing and shall furnish a weight ticket for each load pursuant to a weighing services agreement. Any load for which no weight ticket is furnished shall be considered a lost sample load with a weight equal to the weight of the heaviest load presented during the billing period, as established by the Forest Service.

K-G.9# - STEWARDSHIP PROJECTS (09/2004)

Performance of stewardship projects shall be in accordance with the following specifications.

Stewardship Projects

STEWARDSHIP PROJECTS PURSUANT TO K-G.9# - STEWARDSHIP PROJECTS (09/2004)

- Project #1- **Small Tree-topping** - see attached project description and specifications.
- Project #2- **Down Wood Creation** - see attached project description and specifications.
- Project #3- **Scalp, Gap Plant, and Tree Protection, Upland Areas** - see attached project description and specifications.
- Project #4- **Scalp, Underplant, and Tree Protection, Upland Areas** - see attached project description and specifications.
- Project #5- **Meadow Restoration** - see attached project description and specifications.
- Project #6- **Road Decommissioning** - see attached project description and specifications.
- Project #7- **Deferred Road Maintenance** - see attached project description and specifications.

K-H.1 - PLANS (05/2005)

The plan shall state how Contractor's representative or alternates will be contacted in a fire emergency, both during periods of operation and at other times such as evenings or weekends. Contractor shall certify compliance with specific fire precautionary measures included as Subsections under K-H.2 - Specific Fire Precautions, before beginning operations during Fire Precautionary Period (closed season) and shall update such certification when operations change.

If helicopter yarding is required, the plan shall include a schedule of rates mutually agreed to for computing Contractor costs incurred toward meeting Contractor's obligations under A.14, or for paying for helicopters controlled by Contractor and used under Forest Service direction for suppressing Operations Fires or other fires on Contract Area, excluding Negligent Fires.

K-H.2 - SPECIFIC FIRE PRECAUTIONS (05/2005)

When the industrial fire precaution level is I or higher, unless waiver is granted under K-H.2.2, specific required fire precautionary measures are as follows:

A. Fire Security.

Contractor shall designate in writing a person or persons who shall perform fire security services listed below on Contract Area and vicinity. The designated person will be capable of operating Contractor's communications and fire fighting equipment specified in the contract, excluding helicopters, and of directing the activities of Contractor's personnel on Forest fires. Such person must report any fire detected to Forest Service within 15 minutes of detection. In lieu of having the designated person perform the required supervisory duties, Contractor may provide another person meeting the qualifications stated above to direct the activities of Contractor's personnel and equipment during all fire fighting activities.

Services described shall be for at least 1 hour from the time Contractor's Operations are shut down. For the purposes of this provision, personnel servicing equipment, and their vehicles, who are not engaged in cutting or welding metal are excluded.

Fire security services shall consist of moving throughout the operation area or areas constantly looking, reporting, and taking suppression action on any fires detected. Where possible, the designated person shall observe inaccessible portions of helicopter operating areas from vantage points within or adjacent to Contract Area.

Contractor shall furnish fire security services based on the predicted industrial precaution level, obtained by Contractor from the appropriate Ranger District Headquarters. If predictions made after 6:00 p.m. local time, are significantly different than originally estimated, Forest Service will inform Contractor when changes in fire security services are indicated.

B. Fire Extinguisher and Equipment (on Trucks, Tractors, Power Saws, etc.).

(a) Each yarder or loader equipped with an internal combustion engine or other spark emitting source shall be equipped with a readily accessible fire extinguisher, with an Underwriter's Laboratory (UL) Rating of at least 5 B,C.

(b) All power-driven equipment operated by Contractor on National Forest land, except portable fire pumps, shall be equipped with one fire extinguisher having a UL rating of at least 5 B,C and one "D" handled or long handled round point shovel, size 0 or larger. In addition, each motor patrol, truck and passenger-carrying vehicle shall be equipped with a double-bit axe or Pulaski, 3-1/2 pounds or larger.

(c) Equipment required in (a) and (b) shall be kept in a serviceable condition and shall be readily available.

(d) Each gasoline power saw operator shall be equipped with a pressurized chemical fire extinguisher of not less than 8-ounce capacity by weight, and one long handled round point shovel, size 0 or larger, except at a landing where a suitable fire extinguisher and shovel are immediately available. The extinguisher will be kept in possession of the saw operator at all times. The shovel shall be accessible to the operator within 1 minute.

(e) Each helicopter shall be equipped with one fire extinguisher having a UL rating of at least 5 B,C mounted inside the aircraft within reach of the pilot's operating position.

(f) One refill for each type or one extra extinguisher sufficient to replace each size extinguisher required on equipment shall be safely stored in the fire tool box or other agreed upon place on Contract Area that is protected and readily available.

(g) At each area where helicopters are being serviced or supplied, a carbon dioxide fire extinguisher with a UL rating of at least 20 B,C will be provided on the site and placed where it is available for immediate use.

C. Spark arresters and mufflers.

Each internal combustion engine shall be equipped with a spark arrester qualified and rated under USDA Forest Service Standard 5100-1a as shown in the National Wildfire Coordination Group Spark Arrester Guide, unless it is:

(a) Equipped with a turbine-driven exhaust supercharger such as the turbocharger. There shall be no exhaust bypass.

(b) A multi-position engine, such as on power saws which must meet the performance levels set forth in the Society of Automotive Engineers (SAE) "multi-positioned small engine exhaust fire ignition standard, SAE recommended practice J335B" as now or hereafter amended.

(c) A passenger carrying vehicle or light truck, or medium truck up to 40,000 GVW, used on roads and equipped with a factory designed muffler complete with baffles and an exhaust system in good working condition.

(d) A heavy duty truck, such as a dump or log truck, or other vehicle used for commercial hauling, used only on roads and equipped with a factory designed muffler and with a vertical stack exhaust system extending above the cab.

Exhaust equipment described in this Subsection, including spark arresters and mufflers, shall be properly installed and constantly maintained in serviceable condition.

D. Fire Tools.

Contractor shall furnish serviceable fire fighting tools in a readily accessible fire tool box or compartment of sound construction with a hinged lid and hasp so arranged that the box can be secured or sealed. The box shall be red and marked "Fire Tools" in letters at least 1 inch high. It shall contain a minimum of:

(a) Two axes or Pulaskis with a 32 inch handle.

(b) Three adze eye hoes. One Pulaski may be substituted for one adze eye hoe.

(c) Three long handled, round point shovels, size 0 or larger.

E. Tank Truck.

Contractor shall provide a tank truck or trailer, containing not less than 300 gallons of water, during yarding, skidding, loading, land clearing, right-of-way clearing, mechanical falling, and mechanical treatment of slash. Such tank truck or trailer shall be maintained in a serviceable condition and located within 10 minutes, round trip, from each operating side during Fire Precautionary Period (closed season), except as provided under H.2.1.

The tank truck or trailer shall be equipped with a pump capable of discharging 20 gallons of water per minute, using a 1/4 inch nozzle tip, through a 50 foot length of poly or rubber lined hose. In addition, 500 feet of serviceable hard rubber poly or rubber lined or FJRL hose of not less than 1 inch outside diameter, fitted with a nozzle capable of discharging a straight stream of 1/4 inch diameter and a spray pattern shall be immediately available for use. The tank, pump, nozzle and at least 250 feet, of the total 500 feet of hose, shall be connected and ready for use at all times. Synthetic hose may be used by

agreement.

If a trailer is used, it shall be equipped with a hitch to facilitate prompt movement. A serviceable tow vehicle shall be immediately available for attachment to the trailer and must meet the time requirements stated above. Such truck or trailer shall be equipped to operate for a minimum of 8 hours.

Where designated on Contract Area Map, Contractor shall provide a tank trailer or water source and pumping equipment, including accessories, which can be lifted and transported by the yarding system. The component parts shall meet all specifications above. The tank trailer or water supply and pumping accessories shall be deliverable to a fire, in area of operations, within 15 minutes of detection.

In lieu of the above tank trailer or water supply for helicopter operations, Contractor may provide a suitable helicopter water bucket with a 300 gallon capacity. When Contractor provides a water bucket, a water source shall be provided within 5 minutes round trip flight time from operating side.

F. Communications.

During Contractor's Operations, excluding powersaw falling and bucking, Contractor shall provide adequate two-way communication facilities to report a fire to Forest Service within 15 minutes of detection. Citizen Band radios (CB's) are not considered adequate two-way communications because FCC Regulations prohibit commercial use.

G. Smoking and Open Fire Restrictions.

Smoking and fires shall be permitted only at the option of Contractor. Contractor shall not permit open fires on Contract Area without advance permission in writing from Forest Service.

H. Blasting.

Blasting shall be permitted only for road construction purposes unless advance permission is obtained from Forest Service.

Whenever the Industrial Fire Precaution Level is II or greater, a fire security person equipped with a long handled round point No. 0 or larger shovel and a 5 gallon backpack pump can filled with water, will stay at location of blast for 1 hour after blasting is done. Blasting may be suspended by Forest Service, in areas of high rate of spread and resistance to control.

Fuses shall not be used for blasting. Explosive cords shall not be used without permission of Forest Service, which may specify conditions under which such explosives may be used and precautions to be taken.

I. Compliance with State Fire Laws.

Listing of specific fire precautionary measures in the foregoing Subsections is not intended to relieve Contractor in any way from compliance with State fire laws covering fire prevention and suppression equipment, applicable to Contractor's Operations.

J. Aircraft Communications.

Every aircraft used in conjunction with Contractor's Operations shall be equipped with an operable radio system. The radio system shall be capable of transmitting and receiving on VHF frequency 122.85 Megahertz (MHz) with a minimum output of 5 watts at the transmitter. The system shall be located and installed so that the pilot can operate it while flying. A shielded all-weather broad-band antenna shall be part of the system. Radio and antenna shall be properly installed and maintained.

Upon discovery or notification of a fire on Contract Area, all aircraft pilots controlled by Contractor

shall monitor VHF frequency 122.85 MHz when within 5 miles of a fire and broadcast their intentions.

K. Logging Block Equipment.

Contractor shall provide a serviceable 5 gallon backpack pump full of water, one axe, and one long handled round point shovel, size 0 or larger, at each haulback block through which a running line passes.

The area below such blocks must be kept clear of all flammable debris under 4 inches in diameter for a distance of 6 feet in all directions. Material larger than 4 inches that poses a fire risk, such as punky logs, must also be removed.

Contractor shall avoid line-rub on rocks or woody material which may result in sparks or sufficient heat to cause ignition of fire.

K-H.2.0.1 - BURNING BY CONTRACTOR (06/2006)

Notwithstanding the Fire Precautionary Period limitation of H.2, Contractor is required to obtain written permission from Forest Service prior to any burning on the National Forest Lands.

K-H.2.2 - EMERGENCY FIRE PRECAUTIONS (05/2005)

Contractor shall restrict operations in accordance with the Industrial Fire Precaution Levels attached. Forest Service may change the Industrial Fire Precaution Levels to other values upon revision of the National Fire Danger Rating System and may change the specific Industrial Fire Precaution Levels when such changes are necessary for the protection of the National Forest. When sent to Contractor, the revised Industrial Fire Precaution Levels will supersede the attached levels.

INDUSTRIAL FIRE PRECAUTIONS SCHEDULE

LEVEL INDUSTRIAL FIRE PRECAUTION

I. Closed Season - Fire precaution requirements are in effect. A Fire Watch/Fire Security is required at this and all higher levels unless otherwise waived.

II. Partial Hootowl - The following may operate only between the hours of 8 p.m. and 1 p.m. local time:

power saws, except at loading sites;
cable yarding;
blasting;
welding or cutting of metal.

III. Partial shutdown - The following are prohibited:

cable yarding - except that gravity operated logging systems employing non-motorized carriages may be operated between the hours of 8 p.m. and 1 p.m. local time when all blocks and moving lines are 10 feet or more above the ground, excluding the line between the carriage and the choker.

power saws - except at loading sites and on tractor/skidder operations between the hours of 8 p.m. and 1 p.m. local time.

In addition, the following are permitted between the hours of 8 p.m. and 1 p.m. local time:

tractor, skidder, feller-buncher, forwarder, or shovel logging operations where tractors, skidders or other equipment with a blade capable of constructing fireline are immediately available to quickly reach and effectively attack a fire start;
mechanized loading and hauling;
blasting;
welding or cutting of metal;
any other spark-emitting operation not specifically mentioned.

IV. General shutdown - All operations are prohibited.

The following definitions shall apply to these Industrial Fire Precaution Levels:

Cable yarding systems: A yarding system employing cables and winches in a fixed position.

Closed Season (Fire Precautionary Period): That time period each year when a fire hazard exists and as described in A.12.

Hauling: Where hauling involves transit through more than one shutdown zone/regulated use area, the precaution level at the woods site shall govern the level of haul restrictions, unless prohibited by other than the Industrial Fire Precaution Level system.

Loading sites/woods site: A place where any product or material (including but not limited to logs,

firewood, slash, soil, rock, poles, posts, etc.) is placed in or upon a truck or other vehicle.

Advance written waiver of the above precautions may be issued by the Contracting Officer or Forest Service Representative.

Such waiver, or substitute precautions under H.2.1, shall prescribe measures to be taken by Contractor to reduce the risk of ignition, and/or the spread of fire. The Contracting Officer or Forest Service Representative shall consider site specific weather factors, fuel conditions, and specific operations that result in less risk of fire ignition and/or spread than contemplated when precaution level was predicted. Consideration shall also be given to measures that reduce the precaution levels above. Contractor shall assure that all conditions of such waivers or substitute precautions are met.

Contractor shall obtain the predicted Industrial Fire Precaution Level from the appropriate Ranger District headquarters. If predictions made after 6:00 p.m., local time, are significantly different than originally estimated, Forest Service will inform Contractor when changes in restrictions or industrial precautions are indicated.

K-H.3.1 - ADDITIONAL AREA OF FIRE RESPONSIBILITY (05/2005)

The area within 200 feet slope distance of the center line of any road constructed or reconstructed under this contract on National Forest lands outside of Contract Area shall be considered as a part of Contract Area in connection with responsibilities under H.3 and H.4 until the road has been accepted in writing by Forest Service.

K-I.1.0 - DISCLAIMER OF EXPRESSED OR IMPLIED WARRANTY (05/2005)

Contractor and Forest Service hereby agree, acknowledge, and accept that there is no expressed or implied warranty provided by the Forest Service that guarantees the Contractor will be allowed to complete the removal of products sold under the terms of the contract. Upon execution of the contract, Contractor hereby acknowledges the acceptance of the risk that this contract is subject to interruption or termination as a result of litigation associated with the environmental analysis process used by the Forest Service in the planning of this project. If such interruption or termination occurs due to litigation, Contractor agrees to accept as full compensation for such interruption remedies pursuant to I.3.3, or for termination remedies pursuant to I.3.4.

K-I.2.1.2 - MARKET-RELATED CONTRACT TERM ADDITION (11/2008)

The term of this contract may be adjusted when a drastic reduction in wood product prices has occurred in accordance with 36 CFR 223.52. The Producer Price Index used to determine when a drastic reduction in price has occurred is stated in A.20. Contractor will be notified whenever the Chief determines that a drastic reduction in wood product prices has occurred. If the drastic reduction criteria specified in 36 CFR 223.52 are met for 2 consecutive calendar quarters, after contract award date, Contracting Officer will add 1 year to the contract term, upon Contractor's written request. For each additional consecutive quarter such a drastic reduction occurs, Contracting Officer will, upon written request, add an additional 3 months to the term during Normal Operating Season, except that no single 3-month addition shall extend the term of the contract by more than one year. Contracting Officer must receive Contractor's written request for a market-related contract term addition before the expiration of this contract.

No more than 3 years shall be added to a contract's term by market-related contract term addition unless the following conditions are met:

(i) The contract was awarded after December 31, 2006; and

(ii) A drastic reduction in wood product prices occurred in at least ten of twelve consecutive quarters during the contract term, but not including the quarter in which the contract was awarded.

For each qualifying quarter meeting the criteria in paragraphs (i) and (ii) of this provision, the Forest Service will, upon the Contractor's written request, add an additional 3 months during the normal operating season to the contract, except no single 3-month addition shall extend the term of a contract by more than 1 year.

In no event shall a revised contract term exceed 10 years as a result of market-related contract term addition.

Additional contract time may not be granted for those portions of the contract that have a required completion date or for those portions of the contract where Contracting Officer determines that the timber is in need of urgent removal or that timber deterioration or resource damage may result from delay.

K-I.3.1# - CONTRACT CHANGES (OPTION 1) (05/2005)

Contract changes involving volumes and/or values will use a weight ratio of 3.1827 to convert net CCF cruise volumes to Tons.

K-I.6.8# (Option 1) - USE OF TIMBER (09/2004)

(a) This contract is subject to the Forest Resources Conservation and Shortage Relief Act of 1990, as amended (16 USC 620, et seq.).

(b) Except for None determined pursuant to public hearing to be surplus, unprocessed Included Timber shall not be exported from the United States nor used in direct or indirect substitution for unprocessed timber exported from private lands by Contractor or any person as defined in the Act (16 USC 620e).

(c) Timber in the following form will be considered unprocessed:

(i) Trees or portions of trees or other roundwood not processed to standards and specifications suitable for end product use;

(ii) Lumber, construction timbers, or cants intended for remanufacturing not meeting standards defined in the Act (16 USC 620e); and

(iii) Aspen or other pulpwood bolts exceeding 100 inches in length.

(d) Unless otherwise agreed in writing, unprocessed Included Timber shall be delivered to a domestic processing facility and shall not be mixed with logs intended for export.

(e) Prior to award, during the life of this contract, and for a period of 3 years from Termination Date, Contractor shall furnish to Forest Service, upon request, records showing the volume and geographic origin of unprocessed timber from private lands exported or sold for export by Contractor or affiliates.

(f) Prior to delivering unprocessed Included Timber to another party, Contractor shall require each buyer, exchangee, or recipient to execute an acceptable agreement that will:

(i) Identify the Federal origin of the timber;

(ii) Specify domestic processing for the timber involved;

(iii) Require the execution of such agreements between the parties to any subsequent transactions involving the timber;

(iv) Require that all hammer brands and/or yellow paint must remain on logs until they are either legally exported or domestically processed, whichever is applicable; and

(v) Otherwise comply with the requirements of the Act (16 USC 620d).

(g) No later than 10 days following the execution of any such agreement between Contractor and another party, Contractor shall furnish to Forest Service a copy of each such agreement. Contractor shall retain, for 3 years from Termination Date, the records of all sales, exchanges, or dispositions of all Included Timber.

(h) Upon request, all records dealing with origin and disposition of Included Timber shall be made available to Contracting Officer.

(i) For breach of this Section, Forest Service may terminate this contract and take such other action as may be provided by statute or regulation, including the imposition of penalties. When terminated by Forest Service under this Section, Forest Service will not be liable for any Claim submitted by Contractor relating to the termination.