

TRAFFIC CONTROL PLAN AND SPECIFICATIONS PURSUANT TO G.3.3 SAFETY

Unless otherwise agreed, the following measures are required to provide adequate warning of hazards for users of roads and trails adjacent to Contractor's Operations.

Part I. Signing and Other Warning Methods:

(a) Signs. The following signs are required when Contractor's Operations are in progress adjacent to or on Forest Service controlled roads and trails:

MINIMUM SIZE AND LEGEND	LETTER	MINIMUM SHAPE	SIZE AND	AND WHEN AND WHERE REQUIRED
1. LOGGING OPERATIONS NEXT ____ MILES (4" letters)		24" (rectangle)	36"	Min. 100 ft. outside of any continuous work areas, on roads listed in K-F.3.1# and trails listed in Part II.
2. LOGGING OPERATIONS (3" letters)		24" (diamond)	24"	To be used in conjunction with "Logging Operations Next ____ Miles" and where work area is not continuous.
3. FOR LOGGING USE ONLY (3" letters)		24" (diamond)	24"	Required where roads listed in K-F.3.1# and temporary roads intersect with K-F.3.1# roads. Install a cross ditch to discourage use when sign is covered or removed for extended periods.
4. TRUCKS (4" letters)		24" (diamond)	24"	At critical intersections on roads listed in K-F.3.1# when traffic is heavy or otherwise exceeds volumes stated in Part II below. Remove or cover when the sign is not applicable.
5. END LOGGING OPERATIONS (4" letters)		24" (rectangle)	36"	Use in conjunction with "Logging Operations Next ____ Miles" and "Logging Operations."
6. TREE FELLING AHEAD (3" letters)		24" (diamond)	24"	Required 200 feet in advance of danger area where timber is being felled adjacent to all roads, including temporary roads, and trails.
7. ROAD MACHINERY AHEAD (3" letters)		24" (diamond)	24"	Required at least 200 feet in advance of Contractor road maintenance operations on roads listed in Schedule K-F.3.1#.

TRAFFIC CONTROL PLAN AND SPECIFICATIONS - G.3.3 Safety (continued)

All signs shall meet requirements as specified in Parts I and VI of the Manual of Uniform Traffic Control Devices (MUTCD).

Sign borders and lettering shall be black. Borders are 1/2 inch wide, inset 1/2 inch from outside edge of sign. All sign backgrounds shall be orange, except signs #1 and 5 which shall be reflectorized orange.

Signs shall be installed on posts, with a 5 foot minimum ground clearance, or on temporary supports complying with MUTCD standards.

All signs are to be removed or covered when operations are interrupted for seasonal nonuse or other extended periods.

Contractor shall furnish flag personnel and advance warning signs when cable or helicopter logging above roads or trails, felling adjacent to roads or trails, where logs being bucked may roll into roads or trails, and in areas where fallout from blasting may occur. On roads listed in K-F.3.1# and temporary roads, Contractor may temporarily block the road in lieu of furnishing flag personnel.

(b) Barricades. On roads listed in K-F.3.1#, if Contractor's Operations cause the traveled way or road shoulders to be constricted overnight, or longer, by such obstructions as decked logs, parked equipment, or piled slash, Contractor shall place barricades on both sides of the encroaching obstruction to safely channel traffic around such obstructions. Barricades shall remain in place until the obstruction is removed.

Barricades shall be Type II and meet specifications in MUTCD, Part VI. Barricades must be at least 3 feet high. Rails must be at least 2 feet long. Striping shall be alternating orange and white, sloping at a 45 degree angle, and reflectorized. For rails 2 feet to 3 feet long, striping shall be 4 inches wide. For rails longer than 3 feet, striping shall be 6 inches wide. Two rails, 8-12 inches in width, must face each direction.

Barricades shall be equipped with warning lights which shall be Type A low intensity flashing and shall be maintained so as to be capable of being visible on a clear night from a distance of 3,000 feet.

(c) Other Traffic Control Methods. The posting of CB channel signs may be authorized.

On roads listed in K-F.3.1#, Contractor may be authorized to install temporary gates, barricades (except cables), or natural barriers. The devices must be installed with the necessary hazard markers, be reasonably passable by Forest Service, and be removed prior to acceptance of the subdivision being served by the road.

TRAFFIC CONTROL PLAN AND SPECIFICATIONS - G.3.3 SAFETY (continued)

Part II. Specific Requirements:

There are no additional requirements.

Contractor and Forest Service agree to the above stated requirements of the Traffic Control Plan:

Name

Name

Title

Title

Date

Date

K-C.1.1# - TIMBER SUBJECT TO AGREEMENT (09/2004)

In addition, there is within Contract Area an unestimated quantity of:

Species	Product
<hr/>	
Douglas-fir and Other Species	Grn Bio Cv

that shall be Included Timber upon written agreement.

K-C.3.5.7# - INDIVIDUAL TREE DESIGNATION (OPTION 1) (06/2008)

All live trees as described in the attached table which meet the minimum tree diameter stated in A.2 are designated for cutting. Additional timber to be cut, if any, will be designated for cutting in accordance with C.3.7.

Leave trees, Marked with orange , or identified by, N/A , are not to be cut, unless designated by the Forest Service.

K-D.4.7# - ABNORMAL DELAY (05/2005)

Unless otherwise agreed, felled timber meeting Utilization Standards shall be removed by Contractor pursuant to C.2 and shall be presented for Scaling within the time period indicated in the following removal schedule. The number of days shown are consecutive calendar days.

Failure to remove and present such timber for Scaling within the required time limits will be considered abnormal delay, subject to D.4.7.

See attached removal schedule.

TABLE I PRESCRIPTION PURSUANT TO K-C.3.5.7# - INDIVIDUAL TREE DESIGNATION (OPTION 1).
(6/2008)

Designation Table

SUBDIVISION	DESIGNATED CUT SPECIES	INDIVIDUAL TREE DESIGNATION
13*, 20*, 32*, 39*	Douglas-fir, western hemlock, Sitka spruce, and red alder	DxD spacing 15 feet ^{1/}
29, 50*		DxD spacing 14 feet ^{1/}
33*, 44*, 46*		DxD spacing 16 feet ^{1/}

*Subdivisions 13, 20, 32, 33, 39, 44, 46, and 50 include 1/2 acre and 1 acre gaps. These gaps will be created by falling all live designated cut species within 83 feet (1/2 acre) and 118 feet (1 acre gap) from the designated leave tree. Gap leave trees are marked with a single band (1/2 acre) or double band (1 acre) of orange tracer paint at breast height and a mark below stump height. (See Contract Area Map for locations.)

Designation by Description (DxD):

Cut all live designated cut species, meeting minimum specifications in A.2, within the DxD spacing of a live merchantable tree with the largest DBH^{2/} within the DxD spacing area in the subdivision. *Boundary trees will not be used to designate cut trees.*

^{1/} Distances are measured in slope distance, tree face to tree face outside bark at breast height (4.5 feet). The face of the tree is defined as the portion of the bole that is closest to the bole of the tree being measured from.

^{2/} Diameter at breast height (DBH) is measured at 4.5 feet above the natural forest floor on the high or uphill side of the tree at a right angle to the lean of the tree. The diameter of trees with swellings, branches, or abnormalities at 4.5 feet will be taken above 4.5 feet at a point where diameter is no longer affected by the condition.

Forest Service shall approve areas of felled timber prior to yarding.

All skyline corridors, skid trails, temporary roads, and landing clearing limits shall be identified and approved pursuant to K-G.4.2# before this provision is implemented.

REMOVAL SCHEDULE PURSUANT TO K-D.4.7# - ABNORMAL DELAY. (5/2005)

REMOVAL SCHEDULE

<u>Included Timber</u>	<u>Time Limits</u>
All.	180 days after felling is started.
All timber decked during construction clearing.	180 days after felling on each Specified Road constructed by Contractor is initiated.
Timber decked during road construction.	180 days after Forest Service authorizes Contractor to use roads pursuant to F.2.

K-E.2.1.5 - DEPOSITS WHEN PAYMENT GUARANTEED (05/2010)

To the extent payment guarantee is provided under E.3, requirements for advance cash deposits under E.2.1.2 shall be waived for the value of Included Timber removed except for:

- (a) Base Rates,
- (b) associated charges, and
- (c) the value of Included Timber exceeding the sum of stewardship credits that have not been established under E.2.2 for mandatory stewardship projects listed in A.4.3 plus optional stewardship projects listed in A.4.3 authorized by Contracting Officer.

Charges for (a), (b) and (c) shall be waived for not more than a monthly billing period, subject to the provisions of E.4.

K-E.2.2 - CHANGES IN STEWARDSHIP CREDITS (06/2008)

The Contracting Officer may at any time, by written order, make changes within the general scope of this contract in any one or more of the following:

- (1) Specifications for Stewardship Projects listed in K-G.9#.
- (2) Quantities of Stewardship Projects listed in A.4.3.
- (3) Prices for Stewardship Projects listed in A.4.3.
- (4) Place of performance of the Stewardship Projects as shown on the Contract Area Map.

In addition, by written agreement, new Stewardship Projects may be added to K-G.9# and A.4.3 as long as they are within the general scope of this contract. Contract Area may be expanded to add new stewardship projects.

If a written change order causes an increase in the time required for performing any part of the work under this contract, the Contracting Officer shall make an adjustment in the Contract Termination Date and shall modify the contract accordingly.

The Contractor must assert their right to equitable adjustments under this provision within 30 days from receipt of the written order. However, if the Contracting Officer decides that the facts justify it, the Contracting Officer may receive and act upon a proposal submitted before contract closure.

If the Contractor's proposal includes the cost of property made obsolete or excess by the change, the Contracting Officer shall have the right to prescribe the manner of the disposition of the property.

Failure to agree to an adjustment under this provision shall be considered a dispute under J.2. However, nothing in this provision shall excuse the Contractor from proceeding with the contract as changed.

In addition, by written modification of the contract, new Stewardship Projects may be added to K-G.9# and A.4.3, with or without expanding the Contract Area, as long as they are within the general scope of this contract.

K-E.4 - PAYMENTS NOT RECEIVED (08/2012)

(a) Payments are due and payable on the date of issue indicated on the bill for collection. When a payment for timber cut and other charges is not received at the location designated by Forest Service by the date specified in the bill for collection, Contracting Officer will suspend all or any part of Contractor's Operations until payment or acceptable payment guarantee is received. Other charges include, but are not limited to:

- (i) Slash disposal, road maintenance, and contract scaling deposits;
- (ii) Cooperative work at rates established by specific agreement under E.2.1.8;
- (iii) Damages pursuant to J.4;
- (iv) Road use fees;
- (v) Restoration of downpayment pursuant to E.2.2;
- (vi) Periodic payments pursuant to E.2.1.3;
- (vii) Extension Deposits pursuant to E.2.1.7; and
- (viii) Other mandatory deposits.

(b) Failure to pay amounts due by the date specified in the bill for collection shall be considered a breach under J.3. The 30-day notice period prescribed therein shall begin to run as of the end of business on the date specified for receipt of payments. If the performance or payment is guaranteed by surety bond, the surety will receive a copy of the written notification of breach. Demand will be made on the surety or other institution providing the guarantee or bond instrument for immediate payment 10 days after issuance of written notification of the breach.

(c) Pursuant to the Debt Collection Improvement Act of 1996, as amended, if payment is not received by Forest Service within 15 days after the date of issue indicated on the bill for collection:

- (i) Simple interest shall be assessed at the Current Value of Funds Rate as established by the Secretary of the Treasury. Interest will begin to accrue as of the date of issue indicated on the initial bill for collection.
- (ii) Debtors will be assessed administrative charges, in addition to the delinquent amount due. Administrative charges are those additional costs incurred by the Government in processing, handling, and collecting delinquent debts.
- (iii) A penalty charge of six (6) percent per annum will be assessed on any portion of a debt delinquent more than 90 days. This penalty charge is in addition to interest and administrative charges under paragraphs (c)(i) and (c)(ii). The penalty charge shall accrue from the date of issue indicated on the bill for collection and shall be assessed on all outstanding amounts, including interest and administrative costs assessed under paragraphs (c)(i) and (c)(ii).
- (iv) Payments will be credited on the date received by the Federal Depository or Collection Officer designated on the bill for collection.

(d) Forest Service remedies for Contractor's failure to make payment for timber cut and other charges when due, except for accrual of interest, suspension of all or any part of Contractor's Operations, and administrative offset, shall be stayed for so long as:

- (i) A bona fide dispute exists as to Contractor's obligation to make such payment and
- (ii) Contractor files and prosecutes a timely Claim.

K-F.1.0.1# - TEMPORARY ROAD AND LANDING CONSTRUCTION (OPTION 1) (06/2010)

In addition to the requirements of F.1 and G.6.3, Contractor and Forest Service will agree to the design, construction, maintenance, closure, and obliteration of all Temporary Roads.

Construction of Temporary Roads in areas shown on Contract Area Map shall be in accordance with the attached plans or criteria.

Unless otherwise agreed, if Contractor's Operations require more than N/A cubic yards of rock for Temporary Roads, landings, or other temporary uses, such rock shall be obtained from commercial sources.

See attached Plans and/or Criteria.

PLANS AND/OR CRITERIA PURSUANT TO K-F.1.0.1# - TEMPORARY ROAD AND LANDING CONSTRUCTION
(OPTION 1) (06/2008)

No plans or criteria are included. Contractor is required to supply plans and/or criteria to the Forest Service prior to beginning construction work.

Forest Service sources are not available. Approximately 580 cubic yards of rock will be needed. All rock shall be from commercial sources. All materials incorporated into work from Contractor provided sources will be "weed free". The Contracting Officer may request written confirmation of methods utilized to insure weed-free status

K-F.1.2# - USE OF ROADS BY CONTRACTOR (09/2004)

Contractor's use of existing roads identified on Contract Area Map by the following codes is prohibited or subject to restrictive limitations, unless agreed otherwise:

Code	Use Limitations
X	Hauling prohibited
R	Hauling restricted
U	Unsuitable for hauling prior to completion of agreed reconstruction
P	Use prohibited
A	Public use restriction
W	Regulation waiver

Roads coded A will be signed by Forest Service to inform the public of use restrictions. Contractor's use of roads coded R, A, or W shall be in accordance with the following restrictions:

See Restricted Road List Table.

TABLE A PURSUANT TO K-F.1.2# - USE OF ROADS BY CONTRACTOR. (9/2004)

Restricted Road List

Road Number	Road Name	Termini		Map Legend	Description of Restrictions
		From	To		
All Roads listed in K-F.3.1# and all Temporary Roads.				R	Road use for vehicles over 26,000 pounds GVWR shall be halted when rainfall exceeds 1.0 inch in 24 hours. This suspension shall be for 24 hours after the 1.0-inch rain event. Contractor shall monitor rainfall accumulation from a Remote Automated Weather Station (RAWS) location to be agreed upon at the Pre-work Meeting.
8172 Unit 50 - all temp rds Units 13, 20, 29, 32 & 33 - All Roads		2.1	End	R R R	Hauling restricted to dry season, June 15 - October 15.

Title and Date of Governing Road Rules Document:

Siuslaw National Forest Road Rule

(Commercial Road Rules)

April 2012

(Effective Date)

K-F.1.3# - ROAD COMPLETION DATE (09/2004)

Construction of Specified Roads shall be completed no later than 09/30/2015; except for earlier construction completion dates for roads listed below:

Road Number	Road Name	Station From To	Completion Date
-------------	-----------	-----------------	-----------------

N/A

Completion date is binding on the party that constructs road, whether Contractor or Forest Service. Contracting Officer may modify the completion date in writing to conform to the Technical Proposal under G.3.1.1 at the request of Contractor.

When Contractor elects Forest Service construction of Specified Roads shown in contract advertisement, Forest Service may adjust construction completion date when road construction is delayed or interrupted for causes that qualify for an adjustment of the completion date of Forest Service's road construction contract. When qualifying delays or interruptions of road construction occur, Forest Service shall evaluate such occurrences and document any findings. The current status of any adjustment shall be available to Contractor on request. Promptly after the end of Normal Operating Season in which qualifying days occur, Forest Service shall give Contractor written notice of (a) number of qualifying days claimed, and (b) new construction completion dates. After all road construction is complete, Forest Service shall grant Contract Term Adjustment. Such adjustment shall be limited to road completion date delays that occurred during Normal Operating Season.

If Forest Service is responsible for road construction and the actual date of road completion is 1 year or more after the completion date stated above, Contractor may request a rate redetermination under D.3 for remaining volume. Such request must be made within 30 days of notification that road construction has been completed. Upon receipt of such request, Forest Service shall redetermine rates using standard methods in effect on the completion date of road construction. Rates to be established shall apply to all timber removed from Contract Area after the effective date of the rate redetermination.

Forest Service shall in no way be responsible for any delay or damage caused by road contractor in performing the road construction, except such delay as may be the fault or negligence of Forest Service.

When Contractor constructs Specified Roads and requests Contract Term Adjustment, completion dates shall be adjusted by number of days that qualify for such adjustment, provided such qualifying days occur before specified construction completion date. When Contractor desires to construct an alternate facility under F.2.6, Forest Service and Contractor shall agree, in writing, on a construction completion date for alternate facility. Contract Term Adjustment as noted above will apply. Completion date shall be adjusted where a Design Change or physical changes necessitate a modification of Specified Road construction work that increases the scope or magnitude of the required work.

If Contractor fails to complete construction of any or all Specified Roads by applicable completion date, as adjusted, Contract Term Extension shall not be granted.

As used in this provision, construction of a road is completed when:

(a) Contractor constructs Specified Roads and Forest Service furnishes Contractor with written notice of acceptance under G.3.6 or

(b) Forest Service constructs road and furnishes Contractor with written notice authorizing use of road.

Notwithstanding F.1, Contractor shall not use a road that Contractor has elected for Forest Service to construct, until construction is completed and Forest Service furnishes Contractor with written notice authorizing use of road.

K-F.2.1.3# - DEPOSIT FOR RECONSTRUCTION ENGINEERING SERVICES (09/2004)

Contractor shall make a cash deposit for engineering services (preconstruction and construction) provided by Forest Service for reconstruction of National Forest system roads necessary to accommodate Contractor's use under this contract, pursuant to 16 USC 537.

The total amount to be deposited by Contractor for reconstruction related engineering services to be completed by Forest Service personnel or by public works contract is \$ \$17,800.00. Contractor shall make this deposit at the end of the first full Normal Operating Season or 12 months from contract award, whichever occurs first. In the event a different deposit schedule is agreed to, such deposit shall be due within 15 days after the date of issue indicated on the initial bill for collection, pursuant to E.4.

The amount of the required deposit will be shown as an associated charge on Contractor's Integrated Resource Account. Forest Service shall retain any unexpended deposit for reconstruction related engineering services.

The deposit for reconstruction related engineering services shall be commensurate with project need and Contractor's road use. Forest Service shall complete reconstruction related engineering services on the following schedule unless a different completion schedule is agreed in writing:

Road or Facility No.	From	Termini To	Engineering Services Completion Date
----------------------	------	------------	--------------------------------------

N/A

Reconstruction related engineering services may consist of some or all of the engineering work and expense of: preparing, setting out, controlling, inspecting, and measuring the reconstruction of a National Forest system road.

K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS (09/2004)

Contractor shall maintain roads in accordance with the following Contract Road Maintenance Requirements Summary:

See Contract Road Maintenance Requirements Summary Table.

TABLE PURSUANT TO K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS. (9/2004)

Contract Road Maintenance Requirements Summary

Road	Termini		Miles	Applicable Prehaul Road Maintenance Specifications									
	From	To		T-811	T-813	T-831	T-832	T-834	T-838	T-839	T-842	T-851	T-854
8172 Seg. 1	Co Rd 857	M.P. 2.4	2.4	P	P	P	P	P	P		P	P	P
8172 Seg. 2	M.P. 2.4	Landing 13-D	3.0	P	P	P	P	P		P	P	P	P
8172-115	8172	Landing 46-B	0.12	P	P	P	P	P		P	P	P	P

P = Contractor Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road	Termini		Miles	Applicable During Haul Road Maintenance Specifications									
	From	To		T-811	T-813	T-831	T-832	T-834	T-838	T-839	T-842	T-851	T-854
8172 Seg. 1	Co Rd 857	M.P. 2.4	2.4	P	P	P	P	P	P		P	P	P
8172 Seg. 2	M.P. 2.4	Landing 13-D	3.0	P	P	P	P	P		P	P	P	P
8172-115	8172	Landing 46-B	0.12	P	P	P	P	P		P	P	P	P

P = Contractor Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road	Termini		Miles	Applicable Post Haul Road Maintenance Specifications									
	From	To		T-811	T-813	T-831	T-832	T-834	T-838	T-839	T-842	T-851	T-854
8172 Seg. 1	Co Rd 857	M.P. 2.4	2.4	P	P	P	P	P	P		P	P	P
8172 Seg. 2	M.P. 2.4	Landing 13-D	3.0	P	P	P	P	P		P	P	P	P
8172-115	8172	Landing 46-B	0.12	P	P	P	P	P		P	P	P	P

P = Contractor Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Description of work required by the above listed T-specs is shown in the following ROAD MAINTENANCE REQUIREMENTS SPECIFICATION table, and included in the Contract.

ROAD MAINTENANCE REQUIREMENTS SPECIFICATION TABLE PURSUANT TO
K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS (9/2004)

1 Road No. and Termini	2 Special Project Specifi- cation	3 Travel Way			4 Brush And Log Out	5 Surfacing	6 Dust Abatement			7 Seasonal Mainte- nance	8 Snow Removal	9 Post Haul	
		Width	X Slope	Comp			Product	Applic Rate	Width			Block	Treat
8172 - Seg 1** Co Rd 857 to M.P. 2.4	T835-F12-2	EX	AI	A	4ft R&L	30 CY Grading A				W			P
8172 - Seg 2 M.P. 2.4 to Landing 13-D	T835-F12-1	EX	AI	A	4ft R&L	150 CY Grading A				W, B		P	P
8172-115 8172 to Landing 46-B	T835-F12-1	EX	AI	A	4ft R&L	20 CY Grading A				W, B		P	P
Water bars*						140 CY Grading Q							

* Waterbar rock is included for filling in or over bladed out existing water bars

** Segment begins 0.3 mile along valley bottom before road turns at earth barricade to head uphill

1/ All materials incorporated into work from Contractor provided sources will be "weed free". The Contracting Officer may request written confirmation of methods utilized to insure weed-free status.

ROAD MAINTENANCE REQUIREMENTS SPECIFICATION CODES TABLE PURSUANT TO
K-F.3.1# - ROAD MAINTENANCE REQUIREMENTS (9/2004)

Column No.	Heading	Entry	Explanation
	Any	Blank	Except as otherwise described, no entry indicates Contractor is not authorized or required to perform the work item(s).
	Any	RC	This work requirement applies only when haul of Contract related construction materials occurs.
2	Special Project Specification	Number	Entry indicates Special Project Specification which applies.
3	Travel Way	EX Numbers IS, C, OS, F, or AI A or B	Contractor shall maintain the traveled way to the width existing upon entry, or at the completion of Specified Road work. Contractor shall maintain the traveled way to the standard width indicated by the entry, plus curve widening, in accordance with Section T-811. If required, the road template shall be shaped to this width and to the designated cross slope before haul and during recurring maintenance. Cross slopes are designated as: IS (Inslope), C (Crown), OS (Outslope), F (Flat), AI (As Is). If compaction is required.
4	Brush and Log Out	Numeric & R and or L As Staked OPT H	Contractor shall remove brush for specified width on either or both the right (R) side or left (L) side of road. Limits of brushing are as staked or marked in the field. Contractor may use hand or mechanical means of brushing. Only hand brushing may be used.
5	Surfacing	Aggregate Grading D	Contractor shall place surfacing on roads listed according to the grading indicated. Contractor is to make deposits for listed road maintenance, including surface rock replacement.
6	Dust Abatement	OPT Product Abbr. EX Numbers	Product selection is Contractor's choice from those listed in Section T-812. Unless otherwise agreed, Contractor is restricted to product listed corresponding to the abbreviation shown in Section T-812; (i.e., LigS = Lignon Sulfonate) Application rates are estimated amounts. Contractor shall abate dust on the existing width Contractor shall abate dust to the width indicated by entry.
7	Seasonal Maintenance	W B	Waterbars and/or crossditching shall be required prior to expected seasonal precipitation. Entrance barriers shall be installed by Contractor prior to nonuse periods.
8	Snow Removal	TS JU Blank	Snowplowing authorized for Contractor's Operations without recreation access being provided per Section T-803 requirements. Snowplowing authorized, but must provide for recreation joint use per Section T-803 requirements. Snowplowing is not authorized. Forest Service may authorize plowing by permit when not in conflict with other uses.
9	Post Haul	P	P denotes that work is Contractor's Responsibility to perform.

K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

Unless otherwise agreed to between Contractor and Forest Service, Contractor's Operations shall be performed in accordance with the following schedule.

See attached schedule.

SCHEDULE PURSUANT TO K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

Subdivision	Operating Conditions	Purpose
R/W	All ditch clean-out with ground disturbing equipment, such as an excavator shall be restricted to June 15 through October 15.	<u>2/</u>
All	Installing and removing in-stream culverts shall be restricted to July 1 through September 15.	<u>2/</u>
All	All road brushing on system roads not subject to T-838 or T-839 in K-F.3.1# shall be restricted to June 15 through September 15.	<u>3/</u>
All	Road Construction/Reconstruction (including Temporary Roads) and landing construction shall be restricted to June 1 through October 15.	<u>2/</u>
All	Ground based felling, yarding and machine piling is restricted to June 15 through October 15.	<u>2/</u>
20, 29, 32, 33, 39, 44, 46, 50 Rd 8172 & 8172115*	Hourly Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws) shall be restricted between April 1 and September 15 to two hours after sunrise to two hours before sunset.	<u>1/</u>
46, 50	Date Restrictions: All operations, except haul, that are within 100 yards of mature or old growth forest* shall be restricted to August 6 through March 31.	<u>1/</u>

1/ To minimize disturbance to Marbled Murrelets or Spotted owls during the nesting season that are within 100 yards of mature or old growth forest* and involve use of heavy equipment or power-tools (such as chainsaws)


2/ To minimize streamcourse sedimentation due to wet weather operations.

3/ To maximize the effectiveness of brushing along the haul route.

* See attached map for roads, subdivisions or portions of subdivisions that fall approximately within the 100 yards of mature or old growth forest (restricted areas).

NOTE: Haul Restrictions have been moved to K-F.1.2# - Use of Roads by Purchaser.

MAP OF RESTRICTED AREAS PURSUANT TO K-G.3.1.5# - PROJECT OPERATION SCHEDULE (05/2005)

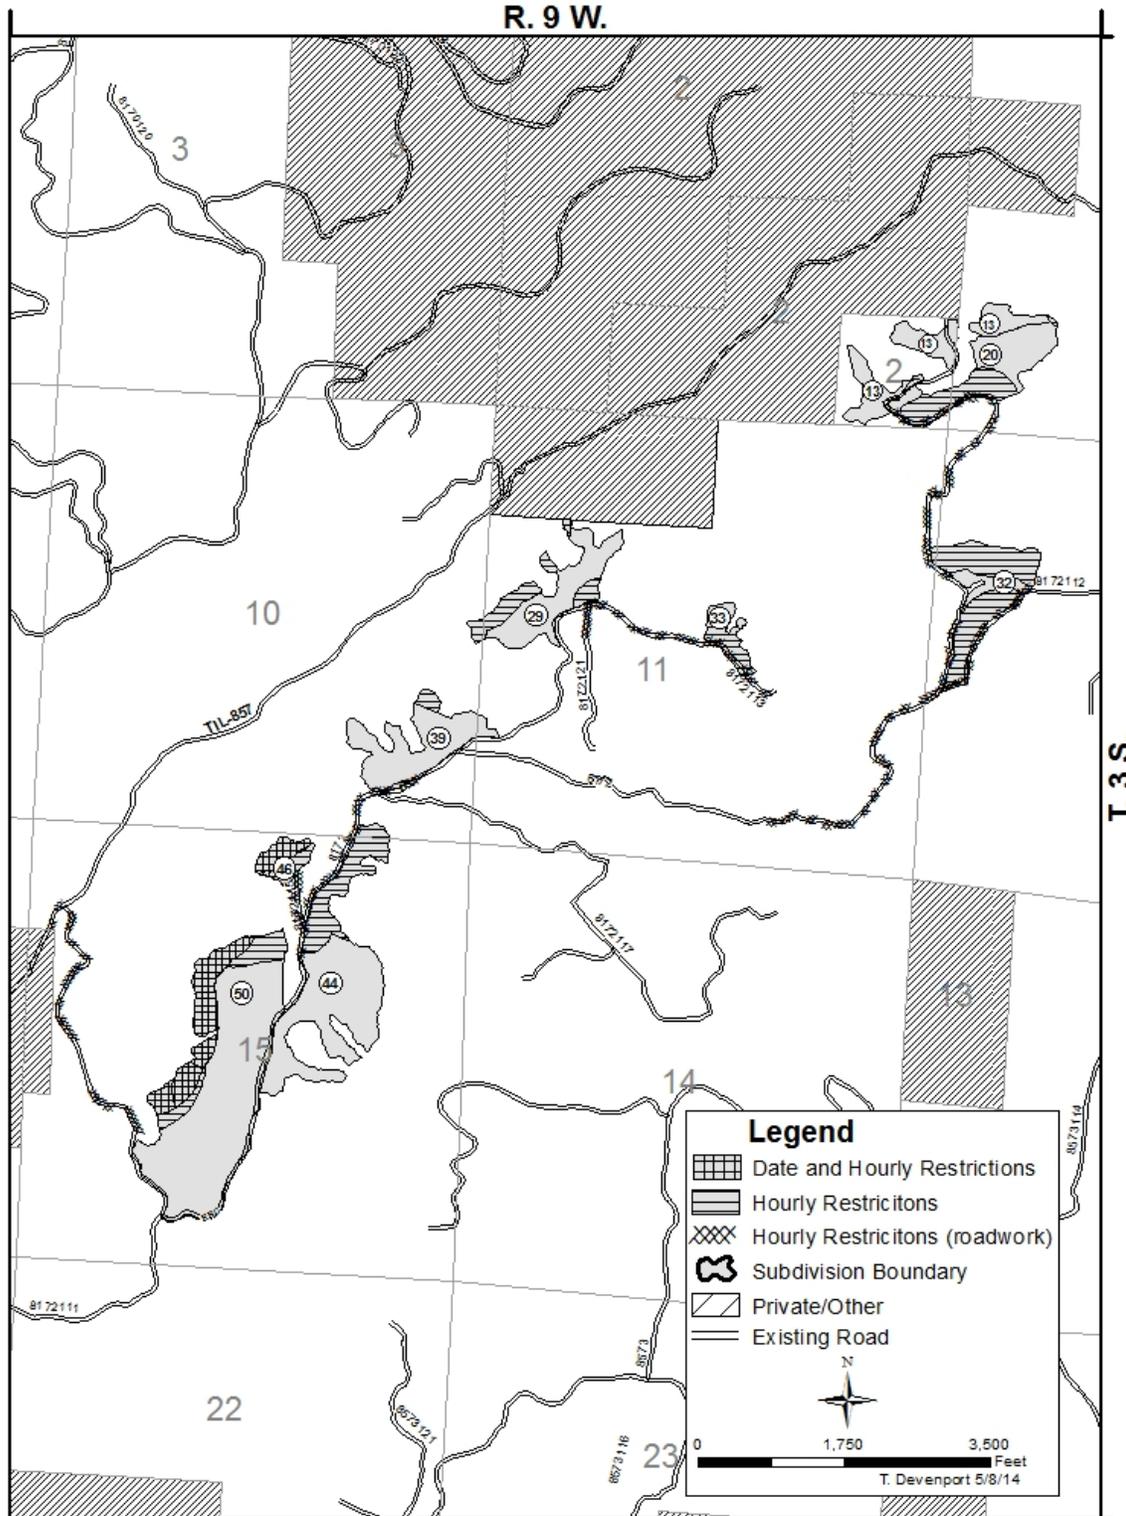

K-G.4.0.5 - ALTERNATE REMOVAL OF INCLUDED TIMBER (05/2005)

Contractor and Forest Service may agree to alternate removal requirements of Included Timber contained in A.2. Alternate removal requirements are to be set forth in an agreement signed by both Contractor and Contracting Officer. The terms of the agreement binds both parties and becomes part of the stewardship contract.

The development and execution of the agreement is based upon the determination by the Contracting Officer that removal of Included Timber is economically impractical if Contractor has no ready market for such logs in the tributary area. A tributary area is defined as the area in which the Contractor and competitors regularly deliver saw logs, or 200 miles from the Contract Area, whichever distance is greater.

The agreement for alternate removal requirements shall be executed prior to removing any timber from the Subdivisions included in the agreement. Alternate removal requirements shall apply only to whole units and not to portions of units. All material meeting alternate removal specifications shall be cut and removed to locations designated in the agreement.

Volumes of material with alternate removal requirements will be determined from the National Cruise report for the project. Contractor will be charged for the following:

- a) stumpage value at current contract rates of the alternatively removed timber;
- b) plus the cost of other work required by the Forest Service to dispose of alternatively removed material;
- c) plus the difference between the appraised transportation cost of the Sawtimber and/or Nonsawtimber material involved and the appraised transportation cost of the alternative;
- d) minus any work required to be completed by the Contractor associated with alternate removal requirements.

Charges will be debited to the Contractor's Integrated Resource Account.

Upon acceptance of the alternate removal requirements, the Subdivision will be removed from the Contract Area under G.3.6.

Title to material included in the alternate removal agreement shall remain with the Forest Service.

K-G.4.1# - SPECIFIC REQUIREMENTS (05/2005)

Notwithstanding G.4.1, G.4.1.1, G.5 and G.6.1, felling objectives shall be accomplished by the type of felling methods and equipment listed herein. Methods or equipment other than those specified may be approved. For Subdivisions shown in the following table, Contractor shall submit a cutting plan for Forest Service acceptance, prior to the start of felling operations.

See attached Table.

TABLE PURSUANT TO K-G.4.1# - SPECIFIC REQUIREMENTS (05/2005)

FELLING METHODS

Trees shall be felled away from paved roads, private property, streamcourses, buffers, and leave areas, and to the lead of cable corridors and ground-based skid roads. Any tree that falls in a streamcourse or a buffer shall be left in place unless otherwise approved by the Forest Service for removal.

SUBDIVISIONS

All

FELLING EQUIPMENT

Equipment included in your Technical Proposal and accepted by the Forest Service.

SUBDIVISIONS

All

K-G.4.2# - YARDING/SKIDDING REQUIREMENTS (05/2005)

Contractor shall submit for Forest Service approval a Yarding/Skidding Plan prior to the start of felling operations. Requirements other than those specified in the following table may be approved. When appropriate, such approval shall include adjustments in Current Contract Rates and revision of the Contract Area Map. In no such case shall the adjustments result in Current Contract Rates less than Base Rates.

Location of all skid roads and trails, tractor roads, skyline corridors, mechanized harvester trails, forwarder roads, and other log skidding facilities, shall be approved prior to their use or construction.

See attached table for requirements.

TABLE PURSUANT TO K-G.4.2# - YARDING/SKIDDING REQUIREMENTS (05/2005)

YARDING/SKIDDING REQUIREMENTS	SUBDIVISIONS
<p>If skyline yarding is included in your Technical Proposal and accepted by the Forest Service:</p> <ul style="list-style-type: none"> • corridor locations shall be approved in advance of felling operations • corridors will be no more than 12 feet wide and no closer than 120 feet at the far end • one end suspension during inhaul • keep the entire length of logs fully suspended above the ground 50 feet each side of the streamcourse during inhaul when yarding across streamcourses • no more than 20 percent of the canopy will be removed in any given 1,000-foot reach of stream when passing through riparian buffers 	All
<p>If ground-based yarding is included in your Technical Proposal and accepted by the Forest Service:</p> <ul style="list-style-type: none"> • skid trails will be no more than 15 feet wide and with an average spacing of 100 feet apart • Keep one end of the log suspended during skidding <p>The ground-based machine will not be allowed on slopes greater than 30 percent. Where practical, machine shall travel on slash.</p>	All
<p>If contractor chooses to tailhold on private land or land under other ownership, prior to the start of operation for each subdivisions, contractor will have to get written permission from the landowner and provide the Forest Service with a copy of the written permission.</p>	13, 20, 29
<p>Wolfe Creek and some of its tributaries are coho salmon streams which shall not have any disturbance to these stream reaches or the vegetation in these minimum 100 foot stream buffers.</p>	44
<p>The tops from at least 20 percent of felled trees shall be left on site (not yarded or removed) throughout the subdivision. A top is defined as that portion of the tree 6 inches DIB or smaller.</p>	All

K-G.6.0# - EROSION CONTROL AND SOIL TREATMENT BY CONTRACTOR.

(4/14) Erosion prevention and control work required by G.6, shall be completed within 15 calendar days after yarding/skidding operations related to each landing are substantially completed or after Forest Service designation on the ground of work where such designation is required hereunder. Said time limit shall be exclusive of full days lost in Contractor's Operations due to causes beyond Contractor's control. Such on the ground designation shall be done as promptly as feasible unless it is agreed that the location of such work can be established without marking on the ground. After September 15, and as long thereafter as operations continue, the work shall be done as promptly as practicable. Damage resulting from Contractor's Operations due to failure to perform required work shall be repaired by Contractor.

On slopes greater than 30 percent, erosion control measures will be done with methods other than mechanized equipment, unless otherwise agreed.

Where soil has been disturbed or displaced on Contract Area by Contractor's Operations and where measures described in G.6 will not result in satisfactory erosion control or where subsoiling is shown on Contract Area Map, the following shall be performed. If applicable, timing of the work shall be coordinated with required scarification or subsoiling.

(a) Where staked or otherwise marked on the ground by Forest Service, seed, fertilizer, and mulch will be applied as indicated in the attached seeding, fertilizing, and mulching schedule. All applications shall be current and done during the period from September 15 to December 1 unless otherwise agreed to. Applications shall be done only during favorable conditions. If Contractor and Forest Service agree, seed can be applied and covered within 10 days of ground disturbance, and may be done outside the required periods.

(b) Where shown on Contract Area Map, landings, Temporary Roads and/or skidtrails/roads shall be scarified to a depth of 20 inches to provide a seedbed for grass seed, fertilizer, and mulch. Seed, fertilizer, and mulch shall be spread evenly at the rates shown in the table. When the seed, fertilizer, and mulch are applied in separate operations, the second or third operations shall be within 10 days of the first or second.

(c) Where shown on Contract Area Map, landings, Temporary Roads, and skid trails/roads used by Contractor shall be subsoiled to a minimum depth of 20 inches, except that Forest Service may agree to lesser depths. Each subsoiler shank shall be equipped with a shoe and wings which has a total width of at least 18 inches. The design of the shank and wings will be such that the treated, compacted soil is slightly lifted and well-fractured rather than plowed, mixed, or displaced. The distance between subsoiler shank passes shall not exceed 36 inches. Treated areas shall span the total width of compaction. Subsoiling shall be kept reasonably current and shall be done during Normal Operating Season unless otherwise agreed.

(d) When agreed to, Contractor may use alternate methods of erosion control.

Seed shall meet current Forest Service requirements, with the additional requirement that no seed containing any noxious weed seed in excess of established state limitations as listed in the current "State Noxious Weed Requirements Recognized in the Administration of the Federal Seed Act" publication will be used (commonly referred to as the "all states" noxious weed seed list). Seed shall be furnished separately or in mixture in standard containers clearly marked with: (1) seed name; (2) lot number; (3) net weight; (4) percentages of purity and of germination (in case of legumes, percentage of germination to include hard seed); (5) percentage of weed seed content; and (6) certification that no noxious weed seeds in excess of established state standards are present. The contractor shall furnish the Government duplicate signed copies of a certificate, signed by a Registered Seed Technologist or Seed Analyst (certified through either the Association of Official Seed Analysis or the Society of Commercial Seed Technologists), certifying that each lot of seed has been tested in accordance with the Association of Official Seed Analysts Standards within 12 months prior to date of application. This certificate shall include (1) name and address of laboratory, (2) date of test, (3) lot number for each kind of seed, (4) name of seed, (5) percentage of germination, (6) percentage of purity, (7) percentage of weed seed content, and (8) certification that no noxious weed seeds in excess of established state limitations are present in any kind of seed.

Legume seed shall be inoculated with approved cultures in accordance with the instructions of the manufacturer. No seed may be applied without prior written approval by the government.

(e) Contractor may be required to seed areas disturbed by harvest activities to prevent the spread of noxious weeds, or the establishment of new areas.
See attached application schedule. **See attached application schedule.**

APPLICATION SCHEDULE PURSUANT TO K-G.6.0# - EROSION CONTROL AND SOIL TREATMENT BY CONTRACTOR (05/2005)

SUBDIVISION OR SUBDIVISION NUMBER	AREAS A) SKID TRAILS B) FIRELINES C) TEMP. ROADS D) LANDINGS E) OTHER	SEED		FERTILIZER		MULCH	
		APPLICATION		APPLICATION		APPLICATION	
		SPECIES MIXTURE	LBS/AC	TYPE	LBS/AC	TYPE	LBS/AC
All	A, C, D	<u>1</u> /	22	None		None	

Blue Wild Rye and Sitka Brome grass seed will be provided by the Forest Service for the Contractor to use. A co-op deposit of \$0.02/Ton will be collected from the Contractor to cover the cost of culturing, growing, and harvesting seed for use in future contracts.

1/ For projects in Oregon, the seed shall meet the State certification specifications. Seed must be packaged in containers carrying official certification labels sewn in, glued to, or printed upon the container, with the following information:

1. Variety (if certified as to variety) and kind.
2. Quantity of seed (pounds or bushels).
3. Class of certified seed (blue tags for certified seed).
4. Inspection or lot number traceable to the certifying agency's records.

For projects in Washington, the seed shall be labeled as "Prohibited and Restricted Noxious Weed Free for the State of Washington." The Contractor shall furnish a copy of the seed analysis.

For state of California lands in Region 6, seed must be certified by the state of California, or by an independent agency or company that is approved by the state of California for "prohibited and restricted noxious weed free for the state of California."

For mixtures of seed, each ingredient in excess of 5 percent must be listed with its percentage by weight and its germination percentage.

Legumes must be inoculated with nitrogen fixing bacteria before planting. The label must show the expiration date of the inoculant.

All seed treated with a fungicide or pesticide must be labeled that it is "treated" giving the name of the chemical used, and an appropriate warning or a caution statement.

2/ Fertilizer shall be a standard commercial fertilizer with guaranteed analysis of contents clearly marked on containers.

3/ Mulch shall meet the appropriate State's certification specifications, with evidence of its certification traceable to the certifying agency's records.

K-G.7 - SLASH DISPOSAL (06/2008)

As used in the following Subsections, the term "slash" is vegetative debris including, but not limited to, cull logs, blasted or pushed-out stumps, chunks, broken tops, limbs, branches, rotten wood, damaged brush, damaged or destroyed reproduction, saplings or poles, resulting from Contractor's Operations, including construction of roads or other improvements under this contract. Slash resulting from the construction of Specified Roads shall be disposed of as provided for in Section 201 of the Standard and Special Specifications and as shown in Drawings.

Any burning of slash or refuse by Contractor is subject to K-H.2.0.1.

Forest Service may enter into a written agreement with Contractor for the Contractor to remove slash from landings, subject to D.4.1. Brush disposal deposits paid by the Contractor for the Forest Service to burn landing piles will be credited to the Contractor's integrated resource account in the amount shown in the brush disposal plan, less the amount needed by the Forest Service for final cleanup of the landings following removal of the landing slash piles by the Contractor. The credit will be made following the final removal of all Included Timber, and slash piles, from the Contract Area.

K-G.7.4.2# - SLASH TREATMENT REQUIREMENTS (OPTION 2) (06/2008)

Contractor shall pile, burn, yard, construct firelines or otherwise treat slash defined in K-G.7, within designated areas. Work required of Contractor shall be in accordance with the following slash plan and specifications, and the Contract Area Map.

Unless otherwise agreed, or shown in the attached slash plan or specifications, when Included Timber is removed during Normal Operating Season, required slash work shall be completed within 30 days of removal of approximately three-quarters of the volume in the unit. When Included Timber is removed outside Normal Operating Season, required work will be completed within 30 days of the beginning of the next Normal Operating Season.

See following specifications.

SPECIFICATIONS PURSUANT TO K-G.7.4.2# - SLASH TREATMENTS REQUIREMENTS
(Option 2) (06/2008)

SPECIFIC DISPOSAL METHOD

Unless otherwise agreed, Contractor shall pile or scatter all slash as defined in K-G.7. Scattering of construction slash shall be outside the road clearing limits without damaging trees. All logs shall be limbed. Logs and stumps shall be placed away from trees, positioned so they will not roll, and not be placed on top of one another.

In no event will slash be buried under temporary road or landing embankments.

AREA SUBJECT TO THIS PROVISION

1. All landings and the area within 20 feet of the perimeter of landings.

METHOD OF TREATMENT

Unless otherwise agreed, all slash as defined in K-G.7 - Slash Disposal shall be treated as per Method a or Method b below.

Method a: Machine Piling - Slash less than 10 feet long shall be placed in a compact, dirt free, uniform pile for later disposal by the Forest Service. The pieces shall be placed so that shifting or rolling will not occur and so that no material will extend over the edge of disposal areas. Piles shall be no higher than 15 feet. Piles shall be covered as described below.

Method b: Scattering - Slash shall be scattered across landings, temporary roads, skid trails, yarding corridors, or other openings in the immediate area, as designated by Forest Service Sale Administrator. Scattering shall be accomplished in a manner to avoid windrows and shall not exceed a depth of 1 foot from natural forest floor or road/landing surface.

LOCATION OF PILES

Piles as defined in Method a above, shall be located in the center of openings near or on the landings and as far as possible away from residual trees. Unless otherwise agreed, the base of the piles shall be no closer than 10 feet from standing trees. Excess slash which cannot be piled as per these specifications, will be required to be hauled to a disposal site as designated by the Forest Service.

TIMING OF PILES

Piling of slash shall be done concurrent with yarding on each landing, or within 10 days of completion of yarding on each landing.

COVERING PILES

During the construction of each pile, a 100 sq ft (10'x10') piece of 4 ml polyethylene plastic shall be placed on top of the pile when the pile is 2/3 of the way built. The remaining 1/3 of the slash shall be placed on top of the plastic. Kraft-waterproof paper or other similar product may be substituted for the 4 ml plastic.

K-G.8.1.5 - THIRD PARTY SCALING SERVICES (09/2004)

Notwithstanding the requirement for Forest Service or parties under contract to Forest Service to provide Scaling services under G.8.1, Scaling designated in A.10 shall be conducted by a third party Scaling organization approved by Forest Service. Scaling shall be done in accordance with A.9 and Contractor shall bear costs for Scaling service.

In the event third party Scaling service is suspended for causes such as strikes, termination of third party's approval to Scale National Forest logs by Forest Service, or Contractor's failure to pay third party Scaling costs, hauling operations shall be suspended until agreed alternate Scaling services are provided or service by third party is resumed.

When an approved alternate Scaling location pursuant to G.8.1.1 does not have an approved third party scaling organization as a commonly used Scaling services provider, Forest Service or parties under contract to Forest Service shall provide Scaling services at the approved alternate location. In such an event, the cost of waived third party Scaling listed in A.10 shall be charged to Integrated Resource Account.

If Forest Service and Contractor agree in writing that another party under contract to Forest Service will perform Scaling, the contract will be modified to include K-G.8.1.6 and Integrated Resource Account will be charged for such Scaling.

K-G.8.4 - USE OF PAINT BY CONTRACTOR (OPTION 1) (06/2006)

Notwithstanding G.8.4.2, use of paint by the Contractor within the Contract Area in the same color(s) used by the Forest Service in the preparation and administration of the contract will be by written approval of the Forest Service.

K-G.8.5.1 - WEIGHT OF LOST LOADS (04/2014)

Contractor shall present all loads for weighing and shall furnish a weight ticket for each load pursuant to a weighing services agreement. Any load for which a weight ticket is not provided, or the weight ticket is incomplete or unreadable, or does not include the Forest Service load receipt number, shall be considered a lost sample load with a net weight equal to the load with the heaviest net weight presented during the billing period, as established by the Forest Service.

K-G.9# - STEWARDSHIP PROJECTS (09/2004)

Performance of stewardship projects shall be in accordance with the following specifications.

Stewardship Projects

STEWARDSHIP PROJECTS PURSUANT TO K-G.9# - STEWARDSHIP PROJECTS (09/2004)

- Project #001: Small Tree Topping - see attached project description and specifications.
- Project #002: Down Wood Creation - see attached project description and specifications.
- Project #003: Road Decommissioning - see attached project description and specifications.

K-H.1 - PLANS (05/2005)

The plan shall state how Contractor's representative or alternates will be contacted in a fire emergency, both during periods of operation and at other times such as evenings or weekends. Contractor shall certify compliance with specific fire precautionary measures included as Subsections under K-H.2 - Specific Fire Precautions, before beginning operations during Fire Precautionary Period (closed season) and shall update such certification when operations change.

If helicopter yarding is required, the plan shall include a schedule of rates mutually agreed to for computing Contractor costs incurred toward meeting Contractor's obligations under A.14, or for paying for helicopters controlled by Contractor and used under Forest Service direction for suppressing Operations Fires or other fires on Contract Area, excluding Negligent Fires.

K-H.2 - SPECIFIC FIRE PRECAUTIONS (05/2005)

When the industrial fire precaution level is I or higher, unless waiver is granted under K-H.2.2, specific required fire precautionary measures are as follows:

A. Fire Security.

Contractor shall designate in writing a person or persons who shall perform fire security services listed below on Contract Area and vicinity. The designated person will be capable of operating Contractor's communications and fire fighting equipment specified in the contract, excluding helicopters, and of directing the activities of Contractor's personnel on Forest fires. Such person must report any fire detected to Forest Service within 15 minutes of detection. In lieu of having the designated person perform the required supervisory duties, Contractor may provide another person meeting the qualifications stated above to direct the activities of Contractor's personnel and equipment during all fire fighting activities.

Services described shall be for at least 1 hour from the time Contractor's Operations are shut down. For the purposes of this provision, personnel servicing equipment, and their vehicles, who are not engaged in cutting or welding metal are excluded.

Fire security services shall consist of moving throughout the operation area or areas constantly looking, reporting, and taking suppression action on any fires detected. Where possible, the designated person shall observe inaccessible portions of helicopter operating areas from vantage points within or adjacent to Contract Area.

Contractor shall furnish fire security services based on the predicted industrial precaution level, obtained by Contractor from the appropriate Ranger District Headquarters. If predictions made after 6:00 p.m. local time, are significantly different than originally estimated, Forest Service will inform Contractor when changes in fire security services are indicated.

B. Fire Extinguisher and Equipment (on Trucks, Tractors, Power Saws, etc.).

(a) Each yarder or loader equipped with an internal combustion engine or other spark emitting source shall be equipped with a readily accessible fire extinguisher, with an Underwriter's Laboratory (UL) Rating of at least 5 B,C.

(b) All power-driven equipment operated by Contractor on National Forest land, except portable fire pumps, shall be equipped with one fire extinguisher having a UL rating of at least 5 B,C and one "D" handled or long handled round point shovel, size 0 or larger. In addition, each motor patrol, truck and passenger-carrying vehicle shall be equipped with a double-bit axe or Pulaski, 3-1/2 pounds or larger.

(c) Equipment required in (a) and (b) shall be kept in a serviceable condition and shall be readily available.

(d) Each gasoline power saw operator shall be equipped with a pressurized chemical fire extinguisher of not less than 8-ounce capacity by weight, and one long handled round point shovel, size 0 or larger, except at a landing where a suitable fire extinguisher and shovel are immediately available. The extinguisher will be kept in possession of the saw operator at all times. The shovel shall be accessible to the operator within 1 minute.

(e) Each helicopter shall be equipped with one fire extinguisher having a UL rating of at least 5 B,C mounted inside the aircraft within reach of the pilot's operating position.

(f) One refill for each type or one extra extinguisher sufficient to replace each size extinguisher required on equipment shall be safely stored in the fire tool box or other agreed upon place on Contract Area that is protected and readily available.

(g) At each area where helicopters are being serviced or supplied, a carbon dioxide fire extinguisher with a UL rating of at least 20 B,C will be provided on the site and placed where it is available for immediate use.

C. Spark arresters and mufflers.

Each internal combustion engine shall be equipped with a spark arrester qualified and rated under USDA Forest Service Standard 5100-1a as shown in the National Wildfire Coordination Group Spark Arrester Guide, unless it is:

(a) Equipped with a turbine-driven exhaust supercharger such as the turbocharger. There shall be no exhaust bypass.

(b) A multi-position engine, such as on power saws which must meet the performance levels set forth in the Society of Automotive Engineers (SAE) "multi-positioned small engine exhaust fire ignition standard, SAE recommended practice J335B" as now or hereafter amended.

(c) A passenger carrying vehicle or light truck, or medium truck up to 40,000 GVW, used on roads and equipped with a factory designed muffler complete with baffles and an exhaust system in good working condition.

(d) A heavy duty truck, such as a dump or log truck, or other vehicle used for commercial hauling, used only on roads and equipped with a factory designed muffler and with a vertical stack exhaust system extending above the cab.

Exhaust equipment described in this Subsection, including spark arresters and mufflers, shall be properly installed and constantly maintained in serviceable condition.

D. Fire Tools.

Contractor shall furnish serviceable fire fighting tools in a readily accessible fire tool box or compartment of sound construction with a hinged lid and hasp so arranged that the box can be secured or sealed. The box shall be red and marked "Fire Tools" in letters at least 1 inch high. It shall contain a minimum of:

(a) Two axes or Pulaskis with a 32 inch handle.

(b) Three adze eye hoes. One Pulaski may be substituted for one adze eye hoe.

(c) Three long handled, round point shovels, size 0 or larger.

E. Tank Truck.

Contractor shall provide a tank truck or trailer, containing not less than 300 gallons of water, during yarding, skidding, loading, land clearing, right-of-way clearing, mechanical falling, and mechanical treatment of slash. Such tank truck or trailer shall be maintained in a serviceable condition and located within 10 minutes, round trip, from each operating side during Fire Precautionary Period (closed season), except as provided under H.2.1.

The tank truck or trailer shall be equipped with a pump capable of discharging 20 gallons of water per minute, using a 1/4 inch nozzle tip, through a 50 foot length of poly or rubber lined hose. In addition, 500 feet of serviceable hard rubber poly or rubber lined or FJRL hose of not less than 1 inch outside diameter, fitted with a nozzle capable of discharging a straight stream of 1/4 inch diameter and a spray pattern shall be immediately available for use. The tank, pump, nozzle and at least 250 feet, of the total 500 feet of hose, shall be connected and ready for use at all times. Synthetic hose may be used by

agreement.

If a trailer is used, it shall be equipped with a hitch to facilitate prompt movement. A serviceable tow vehicle shall be immediately available for attachment to the trailer and must meet the time requirements stated above. Such truck or trailer shall be equipped to operate for a minimum of 8 hours.

Where designated on Contract Area Map, Contractor shall provide a tank trailer or water source and pumping equipment, including accessories, which can be lifted and transported by the yarding system. The component parts shall meet all specifications above. The tank trailer or water supply and pumping accessories shall be deliverable to a fire, in area of operations, within 15 minutes of detection.

In lieu of the above tank trailer or water supply for helicopter operations, Contractor may provide a suitable helicopter water bucket with a 300 gallon capacity. When Contractor provides a water bucket, a water source shall be provided within 5 minutes round trip flight time from operating side.

F. Communications.

During Contractor's Operations, excluding powersaw falling and bucking, Contractor shall provide adequate two-way communication facilities to report a fire to Forest Service within 15 minutes of detection. Citizen Band radios (CB's) are not considered adequate two-way communications because FCC Regulations prohibit commercial use.

G. Smoking and Open Fire Restrictions.

Smoking and fires shall be permitted only at the option of Contractor. Contractor shall not permit open fires on Contract Area without advance permission in writing from Forest Service.

H. Blasting.

Blasting shall be permitted only for road construction purposes unless advance permission is obtained from Forest Service.

Whenever the Industrial Fire Precaution Level is II or greater, a fire security person equipped with a long handled round point No. 0 or larger shovel and a 5 gallon backpack pump can filled with water, will stay at location of blast for 1 hour after blasting is done. Blasting may be suspended by Forest Service, in areas of high rate of spread and resistance to control.

Fuses shall not be used for blasting. Explosive cords shall not be used without permission of Forest Service, which may specify conditions under which such explosives may be used and precautions to be taken.

I. Compliance with State Fire Laws.

Listing of specific fire precautionary measures in the foregoing Subsections is not intended to relieve Contractor in any way from compliance with State fire laws covering fire prevention and suppression equipment, applicable to Contractor's Operations.

J. Aircraft Communications.

Every aircraft used in conjunction with Contractor's Operations shall be equipped with an operable radio system. The radio system shall be capable of transmitting and receiving on VHF frequency 122.85 Megahertz (MHz) with a minimum output of 5 watts at the transmitter. The system shall be located and installed so that the pilot can operate it while flying. A shielded all-weather broad-band antenna shall be part of the system. Radio and antenna shall be properly installed and maintained.

Upon discovery or notification of a fire on Contract Area, all aircraft pilots controlled by Contractor

shall monitor VHF frequency 122.85 MHz when within 5 miles of a fire and broadcast their intentions.

K. Logging Block Equipment.

Contractor shall provide a serviceable 5 gallon backpack pump full of water, one axe, and one long handled round point shovel, size 0 or larger, at each haulback block through which a running line passes.

The area below such blocks must be kept clear of all flammable debris under 4 inches in diameter for a distance of 6 feet in all directions. Material larger than 4 inches that poses a fire risk, such as punky logs, must also be removed.

Contractor shall avoid line-rub on rocks or woody material which may result in sparks or sufficient heat to cause ignition of fire.

K-H.2.0.1 - BURNING BY CONTRACTOR (06/2006)

Notwithstanding the Fire Precautionary Period limitation of H.2, Contractor is required to obtain written permission from Forest Service prior to any burning on the National Forest Lands.

K-H.2.2 - EMERGENCY FIRE PRECAUTIONS (05/2005)

Contractor shall restrict operations in accordance with the Industrial Fire Precaution Levels attached. Forest Service may change the Industrial Fire Precaution Levels to other values upon revision of the National Fire Danger Rating System and may change the specific Industrial Fire Precaution Levels when such changes are necessary for the protection of the National Forest. When sent to Contractor, the revised Industrial Fire Precaution Levels will supersede the attached levels.

INDUSTRIAL FIRE PRECAUTIONS SCHEDULE

LEVEL INDUSTRIAL FIRE PRECAUTION

I. Closed Season - Fire precaution requirements are in effect. A Fire Watch/Fire Security is required at this and all higher levels unless otherwise waived.

II. Partial Hootowl - The following may operate only between the hours of 8 p.m. and 1 p.m. local time:

- power saws, except at loading sites;
- cable yarding;
- blasting;
- welding or cutting of metal.

III. Partial shutdown - The following are prohibited:

cable yarding - except that gravity operated logging systems employing non-motorized carriages may be operated between the hours of 8 p.m. and 1 p.m. local time when all blocks and moving lines are 10 feet or more above the ground, excluding the line between the carriage and the choker.

power saws - except at loading sites and on tractor/skidder operations between the hours of 8 p.m. and 1 p.m. local time.

In addition, the following are permitted between the hours of 8 p.m. and 1 p.m. local time:

- tractor, skidder, feller-buncher, forwarder, or shovel logging operations where tractors, skidders or other equipment with a blade capable of constructing fireline are immediately available to quickly reach and effectively attack a fire start;
- mechanized loading and hauling;
- blasting;
- welding or cutting of metal;
- any other spark-emitting operation not specifically mentioned.

IV. General shutdown - All operations are prohibited.

The following definitions shall apply to these Industrial Fire Precaution Levels:

Cable yarding systems: A yarding system employing cables and winches in a fixed position.

Closed Season (Fire Precautionary Period): That time period each year when a fire hazard exists and as described in A.12.

Hauling: Where hauling involves transit through more than one shutdown zone/regulated use area, the precaution level at the woods site shall govern the level of haul restrictions, unless prohibited by other than the Industrial Fire Precaution Level system.

Loading sites/woods site: A place where any product or material (including but not limited to logs,

firewood, slash, soil, rock, poles, posts, etc.) is placed in or upon a truck or other vehicle.

Advance written waiver of the above precautions may be issued by the Contracting Officer or Forest Service Representative.

Such waiver, or substitute precautions under H.2.1, shall prescribe measures to be taken by Contractor to reduce the risk of ignition, and/or the spread of fire. The Contracting Officer or Forest Service Representative shall consider site specific weather factors, fuel conditions, and specific operations that result in less risk of fire ignition and/or spread than contemplated when precaution level was predicted. Consideration shall also be given to measures that reduce the precaution levels above. Contractor shall assure that all conditions of such waivers or substitute precautions are met.

Contractor shall obtain the predicted Industrial Fire Precaution Level from the appropriate Ranger District headquarters. If predictions made after 6:00 p.m., local time, are significantly different than originally estimated, Forest Service will inform Contractor when changes in restrictions or industrial precautions are indicated.

K-H.3.1 - ADDITIONAL AREA OF FIRE RESPONSIBILITY (05/2005)

The area within 200 feet slope distance of the center line of any road constructed or reconstructed under this contract on National Forest lands outside of Contract Area shall be considered as a part of Contract Area in connection with responsibilities under H.3 and H.4 until the road has been accepted in writing by Forest Service.

K-I.1.0 - DISCLAIMER OF EXPRESSED OR IMPLIED WARRANTY (05/2005)

Contractor and Forest Service hereby agree, acknowledge, and accept that there is no expressed or implied warranty provided by the Forest Service that guarantees the Contractor will be allowed to complete the removal of products sold under the terms of the contract. Upon execution of the contract, Contractor hereby acknowledges the acceptance of the risk that this contract is subject to interruption or termination as a result of litigation associated with the environmental analysis process used by the Forest Service in the planning of this project. If such interruption or termination occurs due to litigation, Contractor agrees to accept as full compensation for such interruption remedies pursuant to I.3.3, or for termination remedies pursuant to I.3.4.

K-I.2.1.2 - MARKET-RELATED CONTRACT TERM ADDITION (11/2008)

The term of this contract may be adjusted when a drastic reduction in wood product prices has occurred in accordance with 36 CFR 223.52. The Producer Price Index used to determine when a drastic reduction in price has occurred is stated in A.20. Contractor will be notified whenever the Chief determines that a drastic reduction in wood product prices has occurred. If the drastic reduction criteria specified in 36 CFR 223.52 are met for 2 consecutive calendar quarters, after contract award date, Contracting Officer will add 1 year to the contract term, upon Contractor's written request. For each additional consecutive quarter such a drastic reduction occurs, Contracting Officer will, upon written request, add an additional 3 months to the term during Normal Operating Season, except that no single 3-month addition shall extend the term of the contract by more than one year. Contracting Officer must receive Contractor's written request for a market-related contract term addition before the expiration of this contract.

No more than 3 years shall be added to a contract's term by market-related contract term addition unless the following conditions are met:

(i) The contract was awarded after December 31, 2006; and

(ii) A drastic reduction in wood product prices occurred in at least ten of twelve consecutive quarters during the contract term, but not including the quarter in which the contract was awarded.

For each qualifying quarter meeting the criteria in paragraphs (i) and (ii) of this provision, the Forest Service will, upon the Contractor's written request, add an additional 3 months during the normal operating season to the contract, except no single 3-month addition shall extend the term of a contract by more than 1 year.

In no event shall a revised contract term exceed 10 years as a result of market-related contract term addition.

Additional contract time may not be granted for those portions of the contract that have a required completion date or for those portions of the contract where Contracting Officer determines that the timber is in need of urgent removal or that timber deterioration or resource damage may result from delay.

K-I.3.1# - CONTRACT CHANGES (OPTION 1) (05/2005)

Contract changes involving volumes and/or values will use a weight ratio of 2.9483 to convert net CCF cruise volumes to Tons.

K-I.6.8# (Option 1) - USE OF TIMBER (09/2004)

(a) This contract is subject to the Forest Resources Conservation and Shortage Relief Act of 1990, as amended (16 USC 620, et seq.).

(b) Except for none determined pursuant to public hearing to be surplus, unprocessed Included Timber shall not be exported from the United States nor used in direct or indirect substitution for unprocessed timber exported from private lands by Contractor or any person as defined in the Act (16 USC 620e).

(c) Timber in the following form will be considered unprocessed:

(i) Trees or portions of trees or other roundwood not processed to standards and specifications suitable for end product use;

(ii) Lumber, construction timbers, or cants intended for remanufacturing not meeting standards defined in the Act (16 USC 620e); and

(iii) Aspen or other pulpwood bolts exceeding 100 inches in length.

(d) Unless otherwise agreed in writing, unprocessed Included Timber shall be delivered to a domestic processing facility and shall not be mixed with logs intended for export.

(e) Prior to award, during the life of this contract, and for a period of 3 years from Termination Date, Contractor shall furnish to Forest Service, upon request, records showing the volume and geographic origin of unprocessed timber from private lands exported or sold for export by Contractor or affiliates.

(f) Prior to delivering unprocessed Included Timber to another party, Contractor shall require each buyer, exchangee, or recipient to execute an acceptable agreement that will:

(i) Identify the Federal origin of the timber;

(ii) Specify domestic processing for the timber involved;

(iii) Require the execution of such agreements between the parties to any subsequent transactions involving the timber;

(iv) Require that all hammer brands and/or yellow paint must remain on logs until they are either legally exported or domestically processed, whichever is applicable; and

(v) Otherwise comply with the requirements of the Act (16 USC 620d).

(g) No later than 10 days following the execution of any such agreement between Contractor and another party, Contractor shall furnish to Forest Service a copy of each such agreement. Contractor shall retain, for 3 years from Termination Date, the records of all sales, exchanges, or dispositions of all Included Timber.

(h) Upon request, all records dealing with origin and disposition of Included Timber shall be made available to Contracting Officer.

(i) For breach of this Section, Forest Service may terminate this contract and take such other action as may be provided by statute or regulation, including the imposition of penalties. When terminated by Forest Service under this Section, Forest Service will not be liable for any Claim submitted by Contractor relating to the termination.