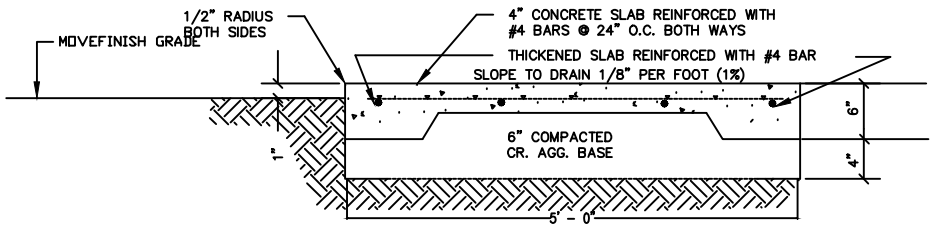

CONCRETE CROSS SECTION

NO SCALE

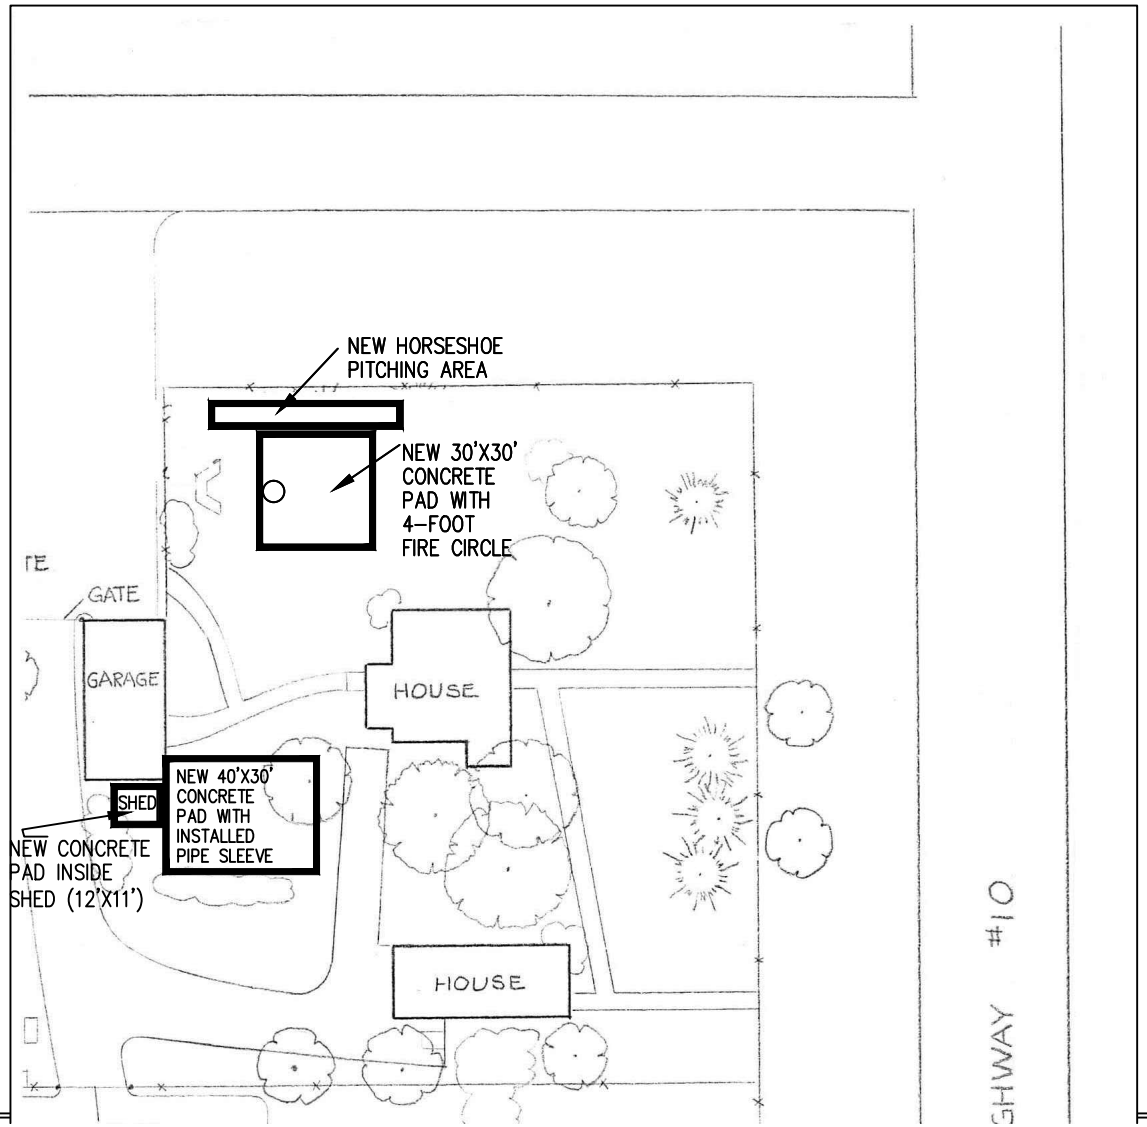

WORK NOTES:

-CONTRACTOR SHALL PREPARE GROUND AND PLACE 6-INCHES OF COMPACTED CRUSHED AGGREGATE FOR A 4-INCH THICK MONOLITHIC CONCRETE SLAB FOR A BASKETBALL COURT, PATIO BY FIREPLACE AND INSIDE SMALL SHED. THE CONCRETE SHALL HAVE A 1% SLOPE.

-CONCRETE SHALL HAVE A SMOOTH FINISH AND BE SEALED.

- CONTRACTOR SHALL SAWCUT CONTROL JOINTS EVERY 10 FEET, EACH WAY. WET CUT JOINTS SHALL NOT BE PERMITTED. (CONTROL JOINTS IN SHED SHALL BE EVERY 5'-6' EACH DIRECTION)

-CONCRETE FLATWORK, HORSESHOE PIT AND FIRE CIRCLE LOCATIONS SHALL BE STAKED BY COR.

-CONTRACTOR SHALL REMOVE AND DISPOSE OF SHRUBS THAT ARE WITHIN THE CONSTRUCTION AREA

- CONCRETE FINISH FLOOR ELEVATION SHALL BE DETERMINED PRIOR TO STARTING WORK.

- CONTRACTOR SHALL INSTALL A BASKETBALL HOOP STEEL PIPE SLEEVE PRIOR TO POURING CONCRETE. COR SHALL STAKE THE LOCATION OF THE PIPE SLEEVE. COR SHALL PROVIDE BASKETBALL HOOP STEEL SLEEVE TO CONTRACTOR

-CONTRACTOR SHALL PROVIDE ALL MATERIALS TO REPAIR EXISTING CHIMNEY FIREPLACE.

U. S. Department of Agriculture
FOREST SERVICE
Intermountain Region 4 Engineering
NATL_FOREST

DESIGN BY: DESIGN_BY
CHECK: DESIGN_CK_BY
DRAWING BY: DRAWN_BY
CHECK: DRWNG-CK-BY
APPROVED: DIRECTOR, ENGINEERING DATE

FERRON_ADMIN_SITE_REC_AREA

CONCRETE_BASKETBALL_COURT_DETAILS

PROJECT No.PRJ_NO
DRAWING No.
SHEET 3 OF 5
FILE NAME & EXT.