Table of Contents

Table of Contents	8
Preface	4
101 - Terms, Format, and Definitions	5
101.01 Meaning of Terms	5
101.03 Abbreviations.	5
101.04 Definitions	5
102 - Bid, Award, and Execution of Contract	8
102 Bid, Award, and Execution of Contract	8
103 - Scope of Work	9
Deletions	9
104 - Control of Work	10
Deletions	10
104.06 Use of Roads by Contractor	10
105 - Control of Material	11
105.02 Material Sources.	11
105.02(a) Government-provided sources	11
105.05 Use of Material Found in the Work	11
106 - Acceptance of Work	12
106.07 Delete	12
107 - Legal Relations and Responsibility to the Public	13
107.05 Responsibility for Damage Claims.	13
107.06 Contractor's Responsibility for Work	13
107.09 Legal Relationship of the Parties.	13
107.10 Environmental Protection.	13
108 - Prosecution and Progress	15
108 Delete.	15
109 - Measurement and Payment	16
109 Deletions	16

109.02 Measurement Terms and Definitions.	16
151 - Mobilization	17
155 - Schedules for Construction Contracts	19
155 Delete	19
156 - Public Traffic	20
201 - Clearing and Grubbing	23
201.06 Disposal	23
203 - Removal of Structures and Obstructions	24
203.05 Disposing of Material.	24
204 - Excavation and Embankment	25
204.06 Roadway Excavation	25
204.11 Compaction	25
204.14 Disposal of Unsuitable or Excess Material.	26
204.15 Acceptance	26
209 - Structure Excavation and Backfill	27
209.10 Backfill	27
209.11 Compacting.	27
209.12 Acceptance	28
230 - Roadside Brushing.	29
301 - Untreated Aggregate Courses	31
301.05 Compacting	31
303 - Road Reconditioning	32
602 - Culverts and Drains	36
602.03 General	36
625 - Turf Establishment	37
625.03 General	37
625.04 Preparing Seedbed.	37
625.05 Watering	37
625.06 Fertilizing.	37
625.07 Seeding	38

625.08 Mulching.	38
625.09 Protecting and Caring for Seeded Areas.	
625.11 Measurement	38
650 - Road Closure Devices	40
718 - Traffic Signing and Marking Material	42
718 05 Aluminum Panels	42

Preface

Delete all but the first paragraph and add the following:

The Forest Service, US Department of Agriculture has adopted FP-03 for construction of National Forest System Roads.

101 - Terms, Format, and Definitions

101.01 Meaning of Terms

Delete all references to the TAR (Transportation Acquisition Regulations) in the specifications.

101.03 Abbreviations.

Add the following to (a) Acronyms:

. == .	
AFPA	American Forest and Paper Association
MSHA	Mine Safety and Health Administration
NIST	National Institute of Standards and Technology
NESC	National Electrical Safety Code
WCLIB	West Coast Lumber Inspection Bureau

.

Add the following to (b) SI symbols:

mp	Milepost
ppm	Part Per Million

101.04 Definitions.

Delete the following definitions and substitute the following:

Bid Schedule--The Schedule of Items.

Bridge--No definition.

Contractor--The individual or legal entity contracting with the Government for performance of prescribed work. In a timber sale contract, the contractor is the "purchaser".

Culvert--No definition.

Right-of-Way-A general term denoting (1) the privilege to pass over land in some particular line (including easement, lease, permit, or license to occupy, use, or traverse public or private lands), or (2) Real property necessary for the project, including roadway, buffer areas, access, and drainage areas.

Add the following:

Adjustment in Contract Price--"Equitable adjustment," as used in the Federal Acquisition Regulations, or "construction cost adjustment," as used in the Timber Sale Contract, as applicable.

Change--"Change" means "change order" as used in the Federal Acquisition Regulations, or "design change" as used in the Timber Sale Contract.

Design Quantity--"Design quantity" is a Forest Service method of measurement from the FS-96 *Forest Service Specifications for the Construction of Roads and Bridges*. Under these FP specifications this term is replaced by the term "Contract Quantities".

Forest Service--The United States of America, acting through the Forest Service, U.S. Department of Agriculture.

Neat Line--A line defining the proposed or specified limits of an excavation or structure.

Pioneer Road--Temporary construction access built along the route of the project.

Purchaser--The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through agents, employees, or subcontractors.

Protected Streamcourse--A drainage shown on the plans or timber sale area map that requires designated mitigation measures.


Road Order--An order affecting and controlling traffic on roads under Forest Service jurisdiction. Road Orders are issued by a designated Forest Officer under the authorities of 36 CFR, part 260.

Schedule of Items--A schedule in the contract that contains a listing and description of construction items, quantities, units of measure, unit price, and amount.

Utilization Standards--The minimum size and percent soundness of trees described in the specifications to determine merchantable timber.

Add Figure 101-1—Illustration of road structure terms:

Figure 101-1—Illustration of road structure terms.

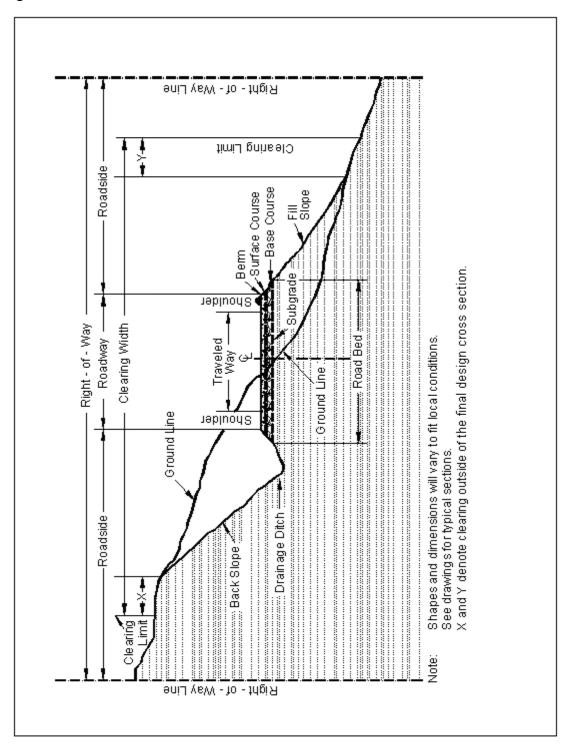

102 - Bid, Award, and Execution of Contract

102 Bid, Award, and Execution of Contract

Delete Section 102 in its entirety.

103 - Scope of Work

Deletions

Delete all but subsection 103.01 Intent of Contract.

104 - Control of Work

Deletions

Delete Sections 104.01, 104.02, and 104.04.

Add the following subsection:

104.06 Use of Roads by Contractor

The Contractor is authorized to use roads under the jurisdiction of the Forest Service for all activities necessary to complete this contract, subject to the limitations and authorizations designated in the Road Order(s) or described in the contract, when such use will not damage the roads or national forest resources, and when traffic can be accommodated safely.

105 - Control of Material

105.02 Material Sources.

105.02(a) Government-provided sources.

Add the following:

Comply with the requirements of 30 CFR 56, subparts B and H. Use all suitable material for aggregate regardless of size unless otherwise designated. When required, re-establish vegetation in disturbed areas according to section 625.

105.05 Use of Material Found in the Work.

Delete 105.05 (a) and (b) and the last sentence of the second paragraph and substitute the following:

Materials produced or processed from Government lands in excess of the quantities required for performance of this contract are the property of the Government. The Government is not obligated to make reimbursement for the cost of producing these materials.

106 - Acceptance of Work

106.07 Delete

Delete subsection 106.07.

107 - Legal Relations and Responsibility to the Public

107.05 Responsibility for Damage Claims.

Delete the entire subsection.

107.06 Contractor's Responsibility for Work.

Delete the following from the first paragraph.

"except as provided in Subsection 106.07".

107.09 Legal Relationship of the Parties.

Delete the entire subsection.

107.10 Environmental Protection.

Add the following:

Design and locate equipment repair shops, stationary refueling sites, or other facilities to minimize the potential and impacts of hazardous material spills on Government land.

Before beginning any work, submit a Hazardous Spill Plan. List actions to be taken in the event of a spill. Incorporate preventive measures to be taken, such as the location of mobile refueling facilities, storage and handling of hazardous materials, and similar information. Immediately notify the CO of all hazardous material spills. Provide a written narrative report form no later than 24 hours after the initial report and include the following:

- Description of the item spilled (including identity, quantity, manifest number, and other identifying information).
- Whether amount spilled is EPA or state reportable, and if so whether it was reported, and to whom.
- Exact time and location of spill including a description of the area involved.
- Containment procedures.

- Summary of any communications the Contractor had with news media, Federal, state and local regulatory agencies and officials, or Forest Service officials.
- Description of clean-up procedures employed or to be employed at the site including final disposition and disposal location of spill residue.

When available provide copies of all spill related clean up and closure documentation and correspondence from regulatory agencies.

The Contractor is solely responsible for all spills or leaks that occur during the performance of this contract. Clean up spills or leaks to the satisfaction of the CO and in a manner that complies with Federal, state, and local laws and regulations.

108 - Prosecution and Progress

108 Delete.

Delete Section 108 in its entirety.

109 - Measurement and Payment

109 Deletions

Delete the following entire subsections:

109.06 Pricing of Adjustments.

109.07 Eliminated Work.

109.08 Progress Payments.

109.09 Final Payment.

109.02 Measurement Terms and Definitions.

(b) Contract quantity.

Add the following:

Contract quantities will be adjusted only when there are errors in the original design of 15% or more.

Change the following:

"(b) Cubic yard" to "(c) Cubic yard".

Add the following definition:

(p) Thousand Board Feet (Mbf). 1,000 board feet based on nominal widths, thickness, and extreme usable length of each piece of lumber or timber actually incorporated in the job. For glued laminated timber, 1,000 board feet based on actual width, thickness, and length of each piece actually incorporated in the job.

109.02 Measurement Terms and Definitions.

Add the following definition:

(q) Actual quantity. (AQ) These quantities are determined from measurements of completed work.

151 - Mobilization

Delete Section 151 in its entirety and replace with the following.

Description

151.01 This work consists of moving personnel, equipment, material, and incidentals to the project and performing all work necessary before beginning work at the project site; obtaining of permits, insurance, and bonds. This work also includes washing and treating construction equipment and vehicles necessary for equipment transport to remove seeds, plants, and plant fragments before the equipment is used on Forest Service lands, according to the requirements within.

Construction Requirements

Wash the sides, tops, and undercarriages of all construction equipment. Remove all seeds, plants, plant fragments, dirt, and debris from the construction equipment. Only equipment inspected by the Forest Service will be allowed to operate within the project area. All subsequent move-ins of equipment to the project area will be treated in the same manner as the initial move-in. This requirement does not apply to cars, pickup trucks, and other vehicles that regularly travel between the construction site and areas off the National Forest.

Equipment will be considered free of soil, seed, and other such debris when a visual inspection does not disclose such material. Disassembly of equipment, components or the need for specialized inspection tools is not required.

Notify the CO in writing at least 72 hours before moving any construction equipment onto the national forest. Notification will include an agreed upon location where the equipment will be available for inspection by the Forest Service. Inspection will be required after every cleaning.

Use methods of cleaning and locations for cleaning approved by the CO.

For work at a commercial washing facility, use an approved facility.

New infestations of noxious weeds of concern to Forest Service and identified by either Contractor or Forest Service, in the Project Area or on the haul route, will be promptly reported to the other party. Contractor and Forest Service will agree on treatment methods to reduce or stop the spread of noxious weeds when new infestations are found. A current list of noxious weeds of concern to Forest Service is available at each Forest Service office.

Measurement

151.02 Clean equipment prior to moving onto this project. The initial cleaning will not be included in the measurement for payment. Payment for cleaning will only be made if subsequent cleanings are ordered by the CO. Measurement shall be on an "each" basis, meaning one complete cleaning of all equipment required for this contract. Subsequent cleanings necessitated by the Contractor's actions but not directed by the CO will not be included in the measurement for payment.

Measure mobilization according to Subsection 109.02.

Payment

151.03_The accepted quantity, measured as provided in Subsection 109.02, will be paid at the contract price per unit of measurement for the Section 151 pay item shown in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Progress payments for mobilization lump sum will be paid as follows:

- (a) If applicable, bond premiums will be reimbursed according to FAR Clause 52.232-5 Payments Under Fixed-Price Construction Contracts, after receipt of the evidence of payment.
- **(b)** When 5 percent of the original contract amount is earned from other bid items, 50 percent of the mobilization item, or 5 percent of the original contract amount, whichever is less, will be paid.
- (c) When 10 percent of the original contract amount is earned from other bid items, 100 percent of the mobilization item, or 10 percent of the original contract amount, whichever is less, will be paid.
- (d) Any portion of the mobilization item in excess of 10 percent of the original contract amount will be paid after final acceptance.

Include all costs associated with the initial cleaning of equipment in the unit bid price for Mobilization. Cleaning for subsequent move-ins will not be paid for unless after a suspension ordered by the CO.

5 Creeks Timber Sale

155 - Schedules for Construction Contracts

155 Delete.

Delete Section 155 in its entirety.

156 - Public Traffic

Delete Section 156 in its entirety and replace with the following:

Description

156.01 This work consists of controlling and protecting public traffic adjacent to and within the project.

Material

156.02 Conform to the MUTCD and the following Sections and Subsections:

Construction sign panels	633
Retroreflective sheeting	718.01
Temporary concrete barrier	618
Temporary plastic fence	710.11
Temporary traffic control devices	718.22

156.03 General. Unless otherwise provided for in Table 156-1, keep existing roads open to all traffic during road improvement work, and maintain them in a condition that will safely and adequately accommodate traffic. Delays may not exceed <u>2</u> hours at any one time followed by an open period of no less than <u>15</u> minutes.

Perform no work that interferes or conflicts with traffic or existing access to the roadway surface until a traffic control plan in accordance with MUTCD Part 6A.01 has been approved. Post construction signs and traffic control devices in conformance with MUTCD. Assure that all required signs are in place and approved prior to beginning work on project.

If the Contractor allows public traffic to use a new road being constructed prior to completion, it will be considered an existing road for traffic control purposes.

Do not construct detours outside of the clearing limits or use alternate route detours without the approval of the CO.

156.04 Temporary Traffic Control. Install and maintain temporary traffic control devices adjacent to and within the project as required by the approved traffic control plan and the MUTCD. Install and maintain traffic control devices as follows:

- (a) Furnish and install traffic control devices before the start of construction operations.
- **(b)** All detours outside of clearing limits shall be approved in writing by the Contracting Officer as part of the traffic control plan.
- (c) Install only those traffic control devices needed for each stage or phase.
- (d) Relocate temporary traffic control devices as necessary.
- (e) Remove or cover devices that no longer apply to the existing conditions.
- (f) Immediately replace any device that is lost, stolen, destroyed, or inoperative.
- (g) Keep temporary traffic control devices clean.
- (h) Remove all temporary traffic control devices upon contract completion or when approved.
- (i) When required, use flaggers certified by the American Traffic Safety Services Association, the National Safety Council, the International Municipal Signal Association, a state agency, or other acceptable organization. Perform the work described under MUTCD Part 6E. Use type III, VII, VIII, or IX retroreflective sheeting on flagger paddles. Do not use flags. Flaggers must wear high visibility safety apparel as required by MUTCD 6E.02.

156.05 Temporary Closures. Road segments may be closed as shown in Table 156-1. The maximum consecutive days of closure shall be followed by a minimum number of consecutive days open to traffic as shown. Maintain traffic control devices during closure period(s). Erect and maintain appropriate barricades and signs as shown in the traffic control plan or as otherwise designated.

Prior to closing roads during construction, give written notice to the Contracting Officer at least 10 days in advance.

Table 156-1
Temporary Road Closures

Road Number	From Terminus	To Terminus	Maximum Consecutive Days Closed	Minimum Consecutive Days Open
NA	NA	NA	NA	NA

156.06 Acceptance. Public traffic work will be evaluated under Subsection 106.02.

Measurement and Payment

156.07 Do not measure Public Traffic for payment. Compensation is made as an indirect payment.

201 - Clearing and Grubbing

201.06 Disposal.

Delete the first sentence of this subsection and substitute the following:

Dispose of merchantable timber designated for removal according to the provisions of the timber sale contract.

203 - Removal of Structures and Obstructions

203.05 Disposing of Material.

(a) Remove from project.

Delete the last two sentences

204 - Excavation and Embankment

204.06 Roadway Excavation

Add the following:

(d) **Drainage Excavation.** Drainage excavation includes construction of side ditches, minor channel changes, inlet and outlet ditches, furrow ditches, rolling drainage dips, surface water deflectors and other minor earth drainage structures as shown on the plans. Compaction for drainage excavation is as shown on the plans.

204.11 Compaction

Delete the first paragraph and replace it with the following:

For compaction according to method (a), (b), or (c), use AASHTO T 27 to determine the amount of material retained on a Number. 4 sieve. For compaction methods (d), (e), or (f) no sieve test is required.

Add the following compaction methods:

- (d) Hauling and Spreading Equipment. Adjust the moisture content to a level suitable for compaction. Compact the material by operating equipment over the full width of the roadway.
- **(e) Roller Compaction.** Adjust the moisture content to a level suitable for compaction. Operate Rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:
 - (1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

(4) Sheepsfoot, tamping, or grid rollers capable of exerting a force of 250 lbs/inch of width of roller drum.

(f) Mechanical Tamper. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each 6 inch layer with a minimum of three complete passes with a mechanical tamper, approved by the CO.

204.14 Disposal of Unsuitable or Excess Material.

Delete the text of the first paragraph and substitute the following:

Dispose of unsuitable or excess material at designated sites or legally off the project.

204.15 Acceptance

Delete the first paragraph.

209 - Structure Excavation and Backfill

209.10 Backfill.

(a) General.

Add the following:

Replace any pipe that is distorted by more than 5 percent of nominal dimensions, or that is ruptured or broken.

Do not place or backfill pipe that meets any of the following conditions until the excavation and foundation have been approved in writing by the CO:

- Embankment height greater than 6 feet at subgrade centerline.
- Installation in a protected streamcourse.
- Round pipe with a diameter of 48 inches or greater.
- Pipe arches with a span of 50 inches or greater.
- Any box culvert of structure other than pipe culverts.

(b) Pipe culverts.

(1) Pipe culverts with compacted backfill.

Add the following:

Excavate an area on each side of the pipe as needed to effectively achieve compaction requirements. Backfill without damaging or displacing the pipe. Complete backfilling of the trench with suitable material.

209.11 Compacting.

Delete the subsection and add the following:

Compact backfill using designated compaction method A, B, or C:

Method A. Ensure that backfill density exceeds the density of the surrounding embankment.

Method B. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each 6 inch layer with a minimum of three complete passes with a

mechanical tamper, approved by the CO. For compaction under sections 252, 254, 255, 257, 258 and 262 compact with a vibratory steel wheeled roller with a mass of at least 8 tons.

Method C. Determine optimum moisture content and maximum density according to AASHTO T 99 method C. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact material placed in all layers to at least 95 percent of the maximum density. Determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

209.12 Acceptance

Add the following:

Compaction methods (A) and (B) do not require sampling and testing.

230 - Roadside Brushing

Description

230.01 Work. This work consists of removing all vegetative material including limbs, residual slash, live roadside brush, and small trees within the brushing limits designated on the plans.

Construction

230.02 Brushing. Cut all brush and small trees (6 inches diameter, or less, at the point of cut) inside the brushing limits and outside the roadbed no higher than 4 inches above ground level (6 inches for machine brushing). If rocks or other obstructions are encountered, cut no higher than 6 inches above the obstruction. Limb live trees with a diameter larger than 6 inches to provide a clear height of 14 feet above the road surface.

Cut all brush and trees located on the roadbed as nearly flush to the road surface as possible so stumps will not become a hazard to vehicle tires.

230.03 Windfalls. Limb windfalls lying within or across the brushing limits, cut off at the top of the existing cut slope or 5 feet from the shoulder on the fill slope. Dispose of windfall material as slash.

230.04 Road Junctions. Do not deposit brushing debris on the roadway of adjoining roads.

230.05 Slash Treatment. Scatter slash outside the brushing limits without damaging residual trees. Slash is defined as any material that has a length greater than 36 inches or a diameter greater than 2 inches at any point. Do not deposit material in streams, streambeds, culvert inlets or outlets, drainage ways, or cattle guards.

230.06 Acceptance. Roadside brushing will be evaluated under Subsection 106.02.

Measurement

230.07 Method. Measure the Section 230 items listed in the bid schedule according to Subsection 109.02 and the following.

Linear measurements will be horizontal along the road centerline.

Quantities will be the number of miles (or stations) and fractions thereof along the road centerline.

Payment

230.08. The accepted quantities will be paid at the contract price per unit of measurement for the section 230 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this section. See Subsection 109.05.

301 - Untreated Aggregate Courses

301.05 Compacting

Delete the first and third paragraphs and add the following:

Compact the aggregate using the following method as specified:

- (c.) Determine the maximum density of the mixture according to AASHTO 180, method D. Compact each layer to at least 95 percent of maximum density. Determine the inplace density and moisture content according to AASHTO T 310 or other approved test procedure.
- (d.) Hauling and Spreading Equipment. Adjust the moisture content to a level suitable for compaction. Operate spreading and hauling equipment over the full width of each layer of the aggregate.
- (e.) Roller Compaction. Adjust the moisture content to a level suitable for compaction. Operate rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:
 - (1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.
 - (2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.
 - (3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

303 - Road Reconditioning

Delete Section 303 in its entirety and replace with the following.

Description

303.01 This work consists of reconditioning ditches, shoulders, roadbeds, parking areas, turnouts, approach road intersections, cattleguards, asphalt surfaces and aggregate surfaces. Construct outslopes, clean and maintain all roadbed drainage structures when shown on the plans.

Material

303.02 Conform to the following Subsection:

Water 725.01

Construction Requirements

303.03 Ditch Reconditioning. Remove all slide material, sediment, vegetation, and other debris from the existing ditches and culvert inlets and outlets. Reshape ditches and culvert inlets and outlets to achieve positive drainage and a uniform ditch width, depth, and grade. Dispose of waste as shown on the plans.

303.04 Shoulder Reconditioning. Repair soft and unstable areas according to Subsection 204.07. Remove all slide material, vegetation, and other debris from existing shoulders including shoulders of parking areas, turnouts, and other widened areas. Dispose of waste as shown on the plans.

303.05 Roadbed Reconditioning Repair soft and unstable areas according to Subsection 204.07. Remove all organic, deleterious material larger than 6 inches from the top 6 inches of

subgrade. Dispose of waste as shown on the plans. Scarify, rip and shape the traveled way and shoulders at locations and to the depth and width designated on the plans. Remove surface irregularities and shape to provide a uniform surface.

Dispose of rock larger than 4 inches brought to the surface during scarification in areas designated on the plans.

For portions of roads not requiring scarification, the roadbed may contain rocks larger than 4 inches provided they do not extend above the finished roadbed surface. Reduce in place or remove rock extending above the finished roadbed surface. Dispose of removed rock in areas designated on the plans.

Compact using the following method as specified:

- (a) Compaction A. Operate equipment over the full width.
- (b) Compaction B. Operate rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:
 - (1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.
 - (2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

303.06 Aggregate Surface Reconditioning. Repair soft and unstable areas to the full depth of the aggregate surface and according to Subsection 204.07. Scarify to the depth of the aggregate surface or to a depth of 8 inches, whichever is less, and remove surface irregularities. Reshape, finish, and compact the entire aggregate surface according to Section 308.

303.07 Roadway Reconditioning. Perform all the applicable work described in Subsections 303.03 through 303.06.

Maintain the existing cross slope or crown unless otherwise shown on the plans. Establish a blading pattern that will retain the surfacing on the roadbed and provide a through mixing of the materials within the completed surface width.

Blade and shape the subgrade for both surfaced and unsurfaced roads when moisture content is suitable for compaction.

303.08 Pulverizing. Scarify the surface to the designated depth and width. Pulverize all material to a size one and one half times the maximum sized aggregate or to 1½ inches, whichever is greater. Mix, spread, compact, and finish the material according to Section 301.

303.09 Acceptance. See Table 303-1 for sampling and testing requirements. Road reconditioning work will be evaluated under Subsections 106.02 and 106.04.

Measurement

303.10 Measure the Section 303 items listed in the Schedule of Items according to Subsection 109.02 and the following as applicable.

Measure ditch reconditioning and shoulder reconditioning by the mile, by the station or foot horizontally along the centerline of the roadway for each side of the roadway.

Measure roadbed reconditioning, aggregate surface reconditioning, roadway reconditioning, and pulverizing by the mile, by the station, or by the square yard.

Payment

303.11 The accepted quantities will be paid at the contract price per unit of measurement for the Section 303 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

602 - Culverts and Drains

602.03 General.

Delete second paragraph and add the following:

The lengths and locations of individual pipe "as shown on the plans" are approximate. Do not order pipe until culvert locations are designated on the ground and a written list of the correct lengths is approved by the C.O.

625 - Turf Establishment

625.03 General.

Delete the first sentence and add the following:

Apply turf establishment to portions of slopes, ditches, waste areas, and other disturbed areas within 14 days after being constructed to template lines unless otherwise specified in writing by the C.O..

625.04 Preparing Seedbed.

Delete the second sentence of the first paragraph.

Delete the third paragraph.

625.05 Watering

Delete the entire paragraph.

625.06 Fertilizing.

Delete the entire subsection and add the following.

Apply fertilizer having a chemical analysis as listed in (c) below by the following methods. Apply seed and fertilizer in one application.

- (a) **Dry Method.** Apply the fertilizer with approved power driven seeders, drills, fertilizer spreaders or other mechanical equipment. Hand operated methods are satisfactory on areas inaccessible to mechanical equipment.
- **(b) Hydraulic method.** Use hydraulic-type equipment capable of providing a uniform application using water as the carrying agent. Add fertilizer to the slurry and mix before adding seed.
- **(c) Chemical analysis.** Apply fertilizer at the rate of 240 pounds per acre. Apply fertilizer having the following chemical analysis.

Nutrient	Percent
Nitrogen, N	<u>27</u>
Phosphorus, P ₂ O ₅	<u>10</u>
Potassium, K	10

Fertilizer having a different chemical analysis may be used if approved in advance by the CO.

625.07 Seeding.

Delete the first sentence and add the following.

Apply seed mix shown in (c) below by the following methods.

(a) Dry method.

Delete the third sentence.

Add the following after subsection (b).

(c) Seed Mix. In terms of pure live seed, furnish and apply the following kinds and amounts of seed. Obtain the pounds of seed to furnish per acre by dividing the pounds of pure live seed required per acre by the product of the percent purity and percent germination.

Example: 5 lbs Pure Live Seed/Acre = 6.55 lbs Commercial Seed/Acre

 0.90×0.85 (Purity = 90% and Germination = 85%)

Kind of Seed	Quantity of Pure Live Seed	
	(Lbs/Acre)	
1. Annual Rye	18	
2. Hard Fescue	6	
3. Orchard Grass	<u>6</u>	
Total	30	

625.08 Mulching.

(b) Hydraulic method.

Delete the first sentence and add the following.

Apply mulch in a separate application from the seed or in a single application with the seed using hydraulic-type equipment according to Subsection 625.07(b).

625.09 Protecting and Caring for Seeded Areas.

Delete the first sentence and add the following.

Protect and care for seeded areas until final acceptance.

625.11 Measurement

Delete the second paragraph and add the following.

Measure seeding, fertilizing, and mulching by the acre on the ground surface or by lump sum.

650 - Road Closure Devices

Description

650.01 Work. Furnish and install, or install only, road closure devices using fabricated gates and accessories, combination post and rail barriers, concrete barriers, earth mound barriers, and other devices.

Materials

650.02 Requirements. Furnish materials to be used in fabricating gates and barriers. Ensure that all hardware is galvanized in accordance with AASHTO M 232 and meets the requirements of ASTM A 307. Furnish plain or cut washers that are American Standard Washers.

Furnish timber posts, rails, and lumber that meet the requirements of AASHTO M 168. Provide timber of the species and type, and rate of preservative treatment.

Furnish concrete that meets the requirements of Subsection 601.03, method B or C.

Construct earth mound barriers from excavated material adjacent to the barrier location, or from other designated locations.

Construction

650.03 Performance. Place road closure devices at designated locations. Construct all devices to the required dimensions. In assembling gates, perform required welding in accordance with the best modern practice and the applicable requirements of AWS D1.1.

After assembly, clean non-galvanized steel pipe gates and paint them with one coat of zinc-rich primer and two coats of exterior enamel of the required type and color.

Set all posts vertically and embed them to the required depth. Place concrete for embedment against undisturbed earth within an excavation sized to achieve the embedment dimensions. Compact the backfill in 6 inch layers to finished grade.

Furnish and install all signs and/or reflective warning markers accessory to the road closure device.

650.04 Acceptance. Construction of road closure devices will be evaluated under Subsections 106.02 and 106.04.

Measurement

650.05 Measure the items listed in the bid schedule according to Subsection 109.02.

Payment

650.06 The accepted quantities, measured as provided in Subsection 109.02 and above, will be paid at the contract price per unit of measurement for the Section 650 pay item listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

718 - Traffic Signing and Marking Material

718.05 Aluminum Panels

Delete the third paragraph and replace with the following:

Clean, degrease and properly prepare the panels according to methods recommended by the sheeting manufacturer. Conversion coatings will conform to ASTM B-921 or ASTM B-449.