Cost Summary
WESTSIDE PLANTATION STEWARDSHIP

HAYFORK RANGER DISTRICT

Road Number	Total Road Cost
1S01*	$ 59,450.00
1S01C	$ 12,000.00
1S02	$ 7,850.00
1S11	$ 58,350.00
1S13	$ 6,500.00
1S23	$ 2,000.00
1N24	$ 10,000.00
4N12	$ 2,000.00
Total Reconstruction	**$ 158,150.00**

Date Submitted:

6/26/2015

By: HQ Engineering

***** This road includes the cost for mobilization

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1S01						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
230(a)	Brushing	DQ	MI	4.50	$2,500.00	$11,250.00
	Slash Treatment Methods for:					
	Tops & Limbs: F (Scattering)					
	Logs: (Deck)					
	Stumps: F (Scattering)					
	Utilization of Timber: (Deck)					
303(a)	Road Reconditioning	CQ	MI	4.5	$4,000.00	$18,000.00
	Compaction B					
204(a)	Excavation and Embankment	CQ	EA	13.00	$1,000.00	$13,000.00
	Rocked Rolling dip					
204(a1)	Excavation and Embankment	CQ	EA	2.00	$1,100.00	$2,200.00
	Rocked Rolling dip W/Lead-off Ditch					
Subtotal - Road Surface Reconstruction						**$44,450.00**
151(a)	Mobilization	CQ	Job	1.00	$15,000.00	$15,000.00
					TOTAL	**$59,450.00**

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1S01C						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
230(b)	Brushing	DQ	MI	0.60	$2,500.00	$ 1,500.00
	Slash Treatment Methods for:					
	Tops & Limbs: F (Scattering)					
	Logs: (Deck)					
	Stumps: F (Scattering)					
	Utilization of Timber: (Deck)					
204(b1)	Excavation and Embankment	CQ	EA	3.00	$ 2,700.00	$ 8,100.00
	Critical Dip					
303(b)	Road Reconditioning	CQ	MI	0.6	$4,000.00	$2,400.00
	Compaction B					
	Total Reconstruction 1S01C					**$ 12,000.00**

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1S02						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
230(c)	Brushing	DQ	MI	0.50	$2,500.00	$ 1,250.00
	Slash Treatment Methods for:					
	Tops & Limbs: F (Scattering)					
	Logs: (Deck)					
	Stumps: F (Scattering)					
	Utilization of Timber: (Deck)					
204(c)	Excavation and Embankment	CQ	LS	1.00	$ 5,000.00	$ 5,000.00
	Widen road - Roack excavation and fill					
303(c)	Road Reconditioning	CQ	MI	0.4	$4,000.00	$1,600.00
	Compaction B					
	Total Reconstruction 1S02					**$ 7,850.00**

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1S11						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
230(d)	Brushing	DQ	MI	2.50	$2,500.00	$ 6,250.00
	Slash Treatment Methods for:					
	Tops & Limbs: F (Scattering)					
	Logs: (Deck)					
	Stumps: F (Scattering)					
	Utilization of Timber: (Deck)					
204(d)	Excavation and Embankment	CQ	EA	8.00	$ 1,000.00	$ 8,000.00
	Rocked Rolling dip					
204(d1)	Excavation and Embankment	CQ	EA	10.00	$ 2,700.00	$ 27,000.00
	Critical Dip					
602(d)	48" CMP MP 0.29	CQ	FT	45.00	$ 190.00	$ 8,550.00
	12 ga					
602(d1)	48" CMP MP 0.56	CQ	FT	45.00	$ 190.00	$ 8,550.00
	12 ga					
	Total Reconstruction 1S11					**$ 58,350.00**

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1S13						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
230(e)	Brushing	CQ	MI	2.60	$2,500.00	$ 6,500.00
	Slash Treatment Methods for:					
	Tops & Limbs: J (Remove to designated locations)					
	Logs: (Deck)					
	Stumps: J (Remove to designated locations)					
	Utilization of Timber: (Deck)					
204(e)	Excavation and Embankment	CQ	EA	3.00	$ 1,000.00	$ 3,000.00
	Rocked Rolling Dip					
204(e1)	Excavation and Embankment	CQ	EA	3.00	$ 2,700.00	$ 8,100.00
	Critical Dip					
	Total Reconstruction 1S13				**TOTAL**	**$ 6,500.00**

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1S23						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
417(f)	Minor Cold Asphalt	CQ	LS	1	$ 2,000.00	$ 2,000.00
	Total Reconstruction 1S23				**TOTAL**	**$ 2,000.00**

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 1N24						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
417(g)	Minor Cold Asphalt	CQ	LS	1	$ 8,000.00	$ 10,000.00
	Total Reconstruction 1N24				**TOTAL**	**$ 10,000.00**
Total Reconstruction 1N24					**TOTAL**	

Schedule of Items						
WESTSIDE PLANTATION STEWARDSHIP						
HAYFORK RANGER DISTRICT						
Road 4N12						
Item No.	**Desc.**	**Meas**	**Unit**	**Qty**	**Unit Price**	**Total**
	Road Surface Reconstruction					
417(h)	Minor Cold Asphalt	CQ	LS	1	$ 2,000.00	$ 2,000.00
	Total Reconstruction 4N12				**TOTAL**	**$ 2,000.00**

Insert Specified Road Drawings

RECONSTRUCTION ROAD LOGS

TABLE OF CONTENTS

	RECONSTRUCTION		
ROAD NUMBER	ROAD NAME	LENGTH	PAGE
1S01	KLONDIKE	4.50	2
1S01C	KLONDIKE	0.60	2
1S02	BEAR	0.50	2
1S11	SWIFTCREEK ROAD	2.50	3
1S13	SIXTEEN ROAD	2.60	3
1S23	HORSE RIDGE ROAD	3.20	4
1N24	McCLELLEN ROAD	4.10	4
4N12	SOUTH FORK MOUNTAIN ROAD	5.00	4
	Total Reconstruction	23	

NOTE: Reconstruct only existing roadway in accordance to specification 303 and as shown on the typical section. Clear all vegetation in accordance to special project specification 230 and as shown on the typical section.

All removed CMPs will become the property of the contractor and will be removed from Government property.

It is assumed the Contractor will acquire all aggregate from the Redding area.

RECONSTRUCTION

1S01, KLONDIKE ROAD RECONSTRUCTION

4.50 MILES

0.00	INTERSECTION WITH 4N12, BEGIN RECONSTRUCTION
0.00-4.50	ROADSIDE BRUSHING AND ROAD RECONDITIONING
0.10	CONSTRUCT ROLLING DIP
0.20	CONSTRUCT ROLLING DIP
0.85	CONSTRUCT ROLLING DIP
0.95	CONSTRUCT ROLLING DIP
1.25	CONSTRUCT ROLLING DIP
1.35	CONSTRUCT ROLLING DIP
1.45	CONSTRUCT ROLLING DIP with LEAD-OFF DITCH
2.45	CONSTRUCT ROLLING DIP
2.50	CONSTRUCT ROLLING DIP
2.60	CONSTRUCT ROLLING DIP
2.65	CONSTRUCT ROLLING DIP
2.75	CONSTRUCT ROLLING DIP
3.00	CONSTRUCT ROLLING DIP
3.25	CONSTRUCT ROLLING DIP with LEAD-OFF DITCH
3.50	CONSTRUCT ROLLING DIP
4.50	END RECONSTRUCTION

1S01C, KLONDIKE ROAD RECONSTRUCTION

0.60 MILES

0.00	INTERSECTION WITH 1S01, BEGIN RECONSTRUCTION
0.00-0.60	ROADSIDE BRUSHING AND ROAD RECONDITIONING
0.0-0.60	CONSTRUCT 3 ROLLING DIPS AS STAKED
0.6	END RECONSTRUCTION

1S02, BEAR ROAD RECONSTRUCTION

0.50 MILES

0.00	INTERSECTION WITH Hwy 36, BEGIN RECONSTRUCTION
0.00-0.50	ROADSIDE BRUSHING
0.10-0.50	ROAD RECONDITIONING
0.10	WIDEN ROAD BY EXCAVATING INTO THE CUTBANK. THIS MAY REQUIRE A ROCK HAMMER. USE MATERIAL TO WIDEN ROAD. MORE MATERIAL IS AVAILABLE FROM THE PIT ADJACENT TO 4N12.
0.40	CONSTRUCT CRITICAL DIP
0.50	END RECONSTRUCTION

1S11, SWIFTCREEK ROAD RECONSTRUCTION

2.50 MILES

0.00	INTERSECTION WITH Hwy 36, BEGIN RECONSTRUCTION
0.00-2.50	ROADSIDE BRUSHING
0.15-	END ASPHALT START ROAD RECONDITIONING, INCLUDING DITCH CLEANING AND RECONDITIONING WHERE NEEDED
0.19	RECONSTRUCT DIP
0.29	REPLACE 36'CMP WITH 48' X 45' CMP
0.29	CONSTRUCT CRITICAL DIP
0.40	CONSTRUCT CRITICAL DIP AT 36" CMP
0.56	REPLACE 36" CMP WITH 48" X 45' CMP, SHIFT DOWNSTREAM 5-10 FEET
0.56	CONSTRUCT CRITICAL DIP
0.60	RECONSTRUCT ROLLING DIP
0.61	INTESECTION WITH 1S13
0.65	CONSTRUCT CRITICAL DIP
0.70	CONSTRUCT ROLLING DIP
0.71	RECONSTRUCT ROLLING DIP
0.88	CONSTRUCT CRITICAL DIP
0.90	CONSTRUCT ROLLING DIP
0.93	RECONSTRUCT ROLLING DIP
0.96	CONSTRUCT ROLLING DIP
1.00	RECONSTRUCT ROLLING DIP
1.21	RECONSTRUCT ROLLING DIP
1.30	CONSTRUCT CRITICAL DIP
1.71	CONSTRUCT CRITICAL DIP
1.80	RECONSTRUCT ROLLING DIP
2.01	CONSTRUCT CRITICAL DIP
2.18	CONSTRUCT CRITICAL DIP
2.50	CONSTRUCT CRITICAL DIP
2.50	END RECONSTRUCTION

1S13, SIXTEEN ROAD RECONSTRUCTION

2.60 MILES

0.00	INTERSECTION WITH 1S11, BEGIN RECONSTRUCTION
0.00-2.20	ROADSIDE BRUSHING AND ROAD RECONDITIONING INCLUDING DITCH CLEANING AND RECONDITIONING WHERE NEEDED
0.17	CONSTRUCT ROLLING DIP
0.75	CONSTRUCT ROLLING DIP
0.83	CONSTRUCT ROLLING DIP
1.00	CONSTRUCT CRITICAL DIP
1.42	CONSTRUCT CRITICAL DIP
2.60	END RECONSTRUCTION

1S23, HORSE RIDGE ROAD RECONSTRUCTION

3.20 MILES

0.00	INTERSECTION WITH Hwy 36,
0.00-3,20	ASPHALT PATCHING
3.20	END OF RECONSTRUCTION

1N24, McCLELLEN ROAD RECONSTRUCTION

4.10 MILES

0.00	INTERSECTION WITH 4N12
0.00-4.10	ASPHALT PATCHING 0.00-2.60
4.10	END RECONSTRUCTION

4N12, SOUTH FORK MOUNTAIN ROAD RECONSTRUCTION

5.00 MILES

0.00	INTERSECTION WITH Hwy 36
4.5-5.00	ASPHALT PATCHING
5.00	END RECONSTRUCTION

Westside Plantation Stew

SPECIAL PROJECT SPECIFICATIONS

Table of Contents

Table of Contents 15
Preface 17
101 - Terms, Format, and Definitions 18
101.01 Meaning of Terms. 18
101.03 Abbreviations. 18
101.04 Definitions 18
102 - Bid, Award, and Execution of Contract 21
102 Bid, Award, and Execution of Contract 21
103 - Scope of Work 22
Deletions 22
104 - Control of Work 23
Deletions 23
104.06 Use of Roads by Contractor 23
105 - Control of Material 24
105.02 Material Sources. 24
105.02(a) Government Provided Sources. 24
105.05 Use of Material Found in the Work. 24
106 - Acceptance of Work 25
106.01 Conformity with Contract Requirements. 25
106.07 Delete 27
107 - Legal Relations and Responsibility to the Public 28
107.05 Responsibility for Damage Claims. 28
107.06 Contractor's Responsibility for Work. 28
107.09 Legal Relationship of the Parties. 28
107.10 Environmental Protection. 28
107.02 Protection and Restoration of Property and Landscape 29
108 - Prosecution and Progress 30
108 Delete. 30
109 - Measurement and Payment 31
109 Deletions 31
109.02 Measurement Terms and Definitions. 31
151 - Mobilization 32
151.01 Description 32
151.02 Measurement 32
155 - Schedules for Construction Contracts 34
155 Delete. 34
156 - Public Traffic 35
156.03 Accommodating Traffic During Work. 37
156.04 Maintaining Roadways During Work. 37
156.08 Traffic and Safety Supervisor. 37
157 - Soil Erosion Control 38

157.03 General. 38
157.08 Water Crossings. 38
204 - Excavation and Embankment 39
212 - Linear Grading 52
230 - Roadside Brushing 55
301 - Untreated Aggregate Courses 57
301.03 General. 57
301.04 Mixing and Spreading. 57
301.05 Compacting. 57
301.06 Surface Tolerance. 57
301.08 Acceptance 58
301.09 Measurement. 58
303 - Road Reconditioning 61
303.03 Ditch Reconditioning 61
303.04 Shoulder Reconditioning 61
303.05 Roadbed Reconditioning 61
303.07 Roadway Reconditioning 61
303.09 Acceptance 61
303.10 Measurement 62
303.10 Measurement 62
602 - Culverts and Drains 49
602.03 General 49
602.05 Laying Metal Pipe 49
650 - Road Closure Devices 63
650.01 Work 51
650.02 Requirements 51
650.02 Performance 51
650.04 Acceptance 52
650.05 Measurement 52
650.06 Payment 52
703 - Aggregate 66
703.05 Subbase, Base, Surface Course, and Screened Aggregate. 66
703.10(e) Flakiness Index. 70
703.10(i) Adherent Coating. 70
Table 703-2 Correction 70

NOTE: These special project specifications supplement the "<u>Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects</u>", FP-03, English.

http://flh.fhwa.dot.gov/resources/pse/specs/

Preface

Preface_wo_03_15_2004_m

Delete all but the first paragraph and add the following:

The Forest Service, US Department of Agriculture has adopted FP-03 for construction of National Forest System Roads.

101 - Terms, Format, and Definitions

101.00_nat_us_07_25_2005

101.01_nat_us_02_17_2005

101.01 Meaning of Terms.

Add the following:

Delete all references in FP-03 to Transportation Acquisition Regulations (TAR).

101.03_nat_us_02_17_2005

101.03 Abbreviations.

Add the following to (a) Acronyms:

AFPA	American Forest and Paper Association
MSHA	Mine Safety and Health Administration
NIST	National Institute of Standards and Technology
NESC	National Electrical Safety Code
WCLIB	West Coast Lumber Inspection Bureau

.

Add the following to (b) SI Symbols:

mp	Milepost
ppm	Part Per Million

101.04_nat_us_02_22_2005

101.04 Definitions.

Delete the following definitions and substitute the following:

Bid Schedule--The Schedule of Items.

Bridge--No definition.

Contractor--The individual or legal entity contracting with the Government for performance of prescribed work. In a timber sale contract, the contractor is the "purchaser".

Culvert--No definition.

Right-of-Way--A general term denoting (1) the privilege to pass over land in some particular line (including easement, lease, permit, or license to occupy, use, or traverse

public or private lands), or (2) Real property necessary for the project, including roadway, buffer areas, access, and drainage areas.

Add the following:

Adjustment in Contract Price--"Equitable adjustment," as used in the Federal Acquisition Regulations, or "construction cost adjustment," as used in the Timber Sale Contract, as applicable.

Change--"Change" means "change order" as used in the Federal Acquisition Regulations, or "design change" as used in the Timber Sale Contract.

Design Quantity-- "Design quantity" is a Forest Service method of measurement from the FS-96 *Forest Service Specifications for the Construction of Roads and Bridges.* Under these FP specifications this term is replaced by the term "Contract Quantities".

Forest Service--The United States of America, acting through the Forest Service, U.S. Department of Agriculture.

Neat Line--A line defining the proposed or specified limits of an excavation or structure.

Pioneer Road--Temporary construction access built along the route of the project.

Purchaser--The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through agents, employees, or subcontractors.

Protected Streamcourse--A drainage shown on the plans or timber sale area map that requires designated mitigation measures.

Road Order--An order affecting and controlling traffic on roads under Forest Service jurisdiction. Road Orders are issued by a designated Forest Officer under the authorities of 36 CFR, part 260.

Schedule of Items--A schedule in the contract that contains a listing and description of construction items, quantities, units of measure, unit price, and amount.
Utilization Standards--The minimum size and percent soundness of trees described in the specifications to determine merchantable timber.

Add Figure 101-1—Illustration of road structure terms:

Figure 101-1—Illustration of road structure terms.

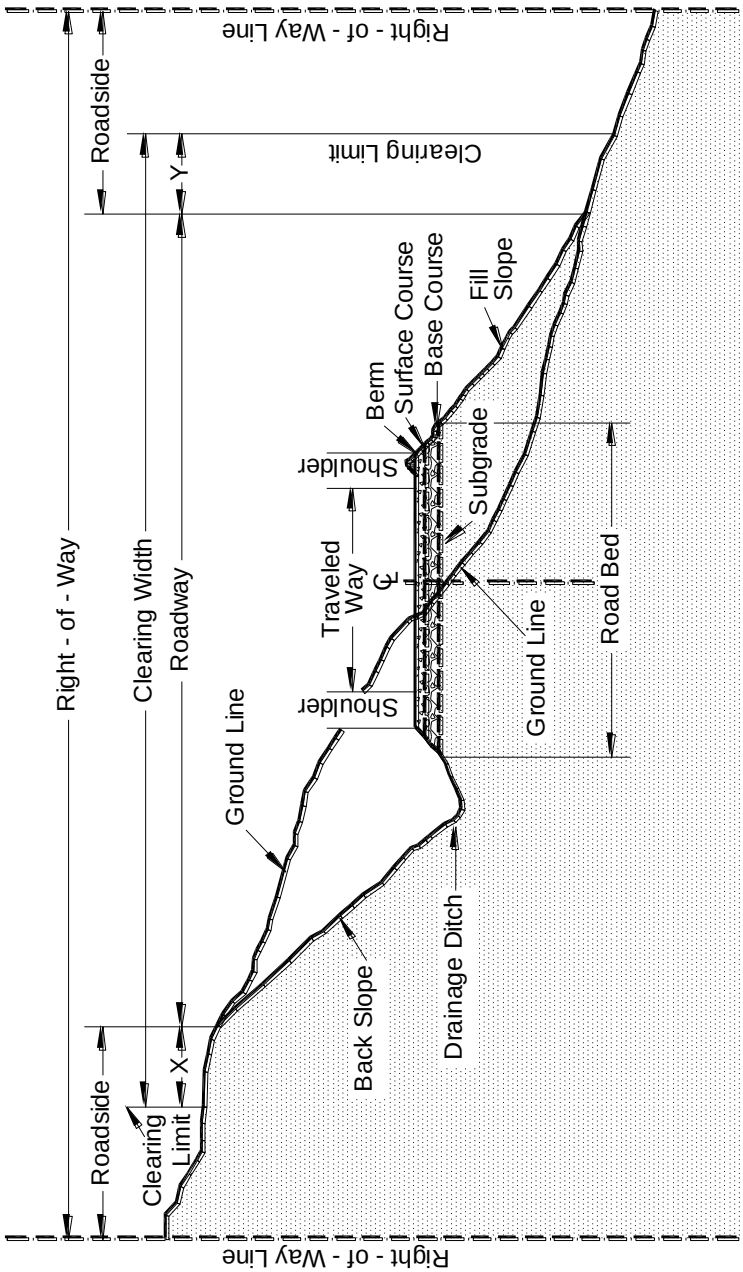

102 - Bid, Award, and Execution of Contract

102.00_nat_us_02_16_2005

102 Bid, Award, and Execution of Contract

Delete Section 102 in its entirety.

103 - Scope of Work

103.00_nat_us_02_16_2005

Deletions

Delete all but subsection 103.01 Intent of Contract.

104 - Control of Work

104.00_nat_us_02_17_2005

Deletions

Delete sections 104.01, 104.02, and 104.04.

104.06_nat_us_02_17_2005

Add the following subsection:

104.06 Use of Roads by Contractor

The Contractor is authorized to use roads under the jurisdiction of the Forest Service for all activities necessary to complete this contract, subject to the limitations and authorizations designated in the Road Order(s) or described in the contract, when such use will not damage the roads or national forest resources, and when traffic can be accommodated safely.

105 - Control of Material

105.02_nat_us_05_11_2004

105.02 Material Sources.

105.02(a) Government Provided Sources.

Add the following:

Comply with the requirements of 30 CFR 56, subparts B and H. Use all suitable material for aggregate regardless of size unless otherwise designated. When required, re-establish vegetation in disturbed areas according to section 625.

105.05_nat_us_05_12_2004

105.05 Use of Material Found in the Work.

Delete 105.05 (a) and (b) and the last sentence of the second paragraph and substitute the following:

Materials produced or processed from Government lands in excess of the quantities required for performance of this contract are the property of the Government. The Government is not obligated to make reimbursement for the cost of producing these materials.

106 - Acceptance of Work

106.01_nat_us_03_29_2005

106.01 Conformity with Contract Requirements.

Delete Subsection 106.01 and substitute the following:

Follow the requirements of FAR Clause 52.246-12 Inspection of Construction.

References to standard test methods of AASHTO, ASTM, GSA, and other recognized standard authorities refer to the methods in effect on the date of solicitation for bids.

Perform all work to the lines, grades, cross-sections, dimensions, and processes or material requirements shown on the plans or specified in the contract.

Incorporate manufactured materials into the work according to the manufacturer's recommendations or to these specifications, whichever is more strict.

Plan dimensions and contract specification values are the values to be strived for and complied with as the design values from which any deviations are allowed. Perform work and provide material that is uniform in character and reasonably close to the prescribed value or within the specified tolerance range. The purpose of a tolerance range is to accommodate occasional minor variations from the median zone that are unavoidable for practical reasons.

When standard manufactured items are specified (such as fence, wire, plates, rolled shapes, pipe conduits, etc., that are identified by gauge, unit mass, section dimensions, etc.), the identification will be considered to be nominal masses or dimensions. Unless specific contract tolerances are noted, established manufacturing tolerances will be accepted.

The Government may inspect, sample, or test all work at any time before final acceptance of the project. When the Government tests work, copies of test reports are furnished to the Contractor upon request. Government tests may or may not be performed at the work site. If Contractor testing and inspection is verified by the Government, the Contractor's results may be used by the Government to evaluate work for acceptance. Do not rely on the availability of Government test results for process control.

Acceptable work conforming to the contract will be paid for at the contract unit bid price. Four methods of determining conformity and accepting work are described in Subsections 106.02 to 106.05 inclusive. The primary method of acceptance is specified in each Section of work. However, work may be rejected at any time it is found by any of the methods not to comply with the contract.

Remove and replace work that does not conform to the contract, or to prevailing industry standards where no specific contract requirements are noted, at no cost to the Government.

(a) Disputing Government test results. **If the accuracy of Government test results is disputed, promptly inform the Government. If the dispute is unresolved after reasonable steps are taken to resolve the dispute, further evaluation may be obtained by written request. Include a narrative describing the dispute and a proposed resolution protocol that addresses the following:**

(1) Sampling method;
(2) Number of samples;
(3) Sample transport;
(4) Test procedures;
(5) Testing laboratories;
(6) Reporting;
(7) Estimated time and costs; and
(8) Validation process.

If the evaluation requires additional sampling or testing be performed, mutually agree with the Government on witnessing procedures and on sampling and testing by a third party laboratory. Use a third party laboratory accredited by the AASHTO accreditation program. Provide proof of the laboratory's accreditation for the test procedures to be used. Do not use the same laboratory that produced the disputed Government test results or that produced the test results used as a basis for the dispute.

The Government will review the proposed resolution protocol and may modify it before final approval and execution.

The Government will use the approved resolution protocol test results to determine the validity of the disputed testing. If the Government test results are validated, the Contractor will be responsible for all costs associated with developing and performing the resolution protocol. If the Government test results are not validated, the Government will be responsible for all costs associated with developing and performing the resolution protocol. If the validity of the Government test results cannot be determined, the Contractor and Government will equally share all costs associated with developing and carrying out the resolution protocol.

(b) Alternatives to removing and replacing non-conforming work. As an alternative to removal and replacement, the Contractor may submit a written request to:

(1) Have the work accepted at a reduced price; or

(2) Be given permission to perform corrective measures to bring the work into conformity.

The request must contain supporting rationale and documentation. Include references or data justifying the proposal based on an evaluation of test results, effect on service

life, value of material or work, quality, aesthetics, and other tangible engineering basis. The Government will determine disposition of the nonconforming work.

106.07_nat_us_05_11_2004

106.07 Delete

Delete subsection 106.07.

107 - Legal Relations and Responsibility to the Public

107.05_nat_us_05_11_2004

107.05 Responsibility for Damage Claims.

Delete the entire subsection.

107.06_nat_us_04_27_2005

107.06 Contractor's Responsibility for Work.

Delete the following:
"except as provided in Subsection 106.07".

107.09_nat_us_05_11_2004

107.09 Legal Relationship of the Parties.

Delete the entire subsection:

107.10_nat_us_02_23_2005

107.10 Environmental Protection.

Add the following:

Design and locate equipment repair shops, stationary refueling sites, or other facilities to minimize the potential and impacts of hazardous material spills on Government land.

Before beginning any work, submit a Hazardous Spill Plan. List actions to be taken in the event of a spill. Incorporate preventive measures to be taken, such as the location of mobile refueling facilities, storage and handling of hazardous materials, and similar information. Immediately notify the Government of all hazardous material spills. Provide a written narrative report form no later than 24 hours after the initial report and include the following:

- Description of the item spilled (including identity, quantity, manifest number, and other identifying information).
- Whether amount spilled is EPA or state reportable, and if so whether it was reported, and to whom.
- Exact time and location of spill including a description of the area involved.
- Containment procedures.
- Summary of any communications contractor had with news media, Federal, state and local regulatory agencies and officials, or Forest Service officials.
- Description of clean-up procedures employed or to be employed at the site including final disposition and disposal location of spill residue.

When available provide copies of all spill related clean up and closure documentation and correspondence from regulatory agencies.

The Contractor is solely responsible for all spills or leaks that occur during the performance of this contract. Clean up spills or leaks to the satisfaction of the Government and in a manner that complies with Federal, state, and local laws and regulations.

107.10_05_us_07_27_2005

107.02 Protection and Restoration of Property and Landscape

Add the following:
Meet the requirements chapters 10, 11, and 12.2 in their entirety of "Water Quality Management for National Forest System Lands in California Best Management Practices" dated September 2000

108 - Prosecution and Progress

108.00_nat_us_02_16_2005

108 Delete.

Delete Section 108 in its entirety.

109 - Measurement and Payment

109.00_nat_us_02_17_2005

109 Deletions

Delete the following entire subsections:

109.06 Pricing of Adjustments.
109.07 Eliminated Work.
109.08 Progress Payments.
109.09 Final Payment.

109.02_nat_us_02_23_2005

109.02 Measurement Terms and Definitions.

(b) Contract quantity.

Add the following:

Contract quantities will be adjusted only when there are errors in the original design of 15% or more.

Change the following:

"(b) Cubic yard" to "**(c) Cubic yard".**

109.02 Measurement Terms and Definitions.

Add the following definition:

(p) Thousand Board Feet (Mbf). 1,000 board feet based on nominal widths, thickness, and extreme usable length of each piece of lumber or timber actually incorporated in the job. For glued laminated timber, 1,000 board feet based on actual width, thickness, and length of each piece actually incorporated in the job.

151 - Mobilization

151.01_0114_us_08_04_2005

151.01 Description

Add the following:

This work consists of washing and treating construction equipment and vehicles necessary for equipment transport to remove seeds, plants, and plant fragments before the equipment is used on Forest Service lands.

Wash the sides, tops, and undercarriages of all construction equipment. Remove all seeds, plants, plant fragments, dirt, and debris from the construction equipment. Only equipment inspected by the Forest Service will be allowed to operate within the project area. All subsequent move-ins of equipment to the project area will be treated in the same manner as the initial move-in. This requirement does not apply to cars, pickup trucks, and other vehicles that regularly travel between the construction site and areas off the National Forest.

Equipment will be considered free of soil, seed, and other such debris when a visual inspection does not disclose such material. Disassembly of equipment, components or the need for specialized inspection tools is not required.

Notify the Government in writing at least 24 hours before moving any construction equipment onto the national forest. Notification will include an agreed upon location where the equipment will be available for inspection by the Forest Service. Inspection will be required after every cleaning.

Use methods of cleaning and locations for cleaning approved by the C.O.

For work at a commercial washing facility, use an approved facility.

New infestations of noxious weeds of concern to Forest Service and identified by either Contractor or Forest Service, on the Project Area or on the haul route, will be promptly reported to the other party. Contractor and Forest Service will agree on treatment methods to reduce or stop the spread of noxious weeds when new infestations are found. A current list of noxious weeds of concern to Forest Service is available at each Forest Service office.

151.02 Measurement

Add the following:

Clean equipment prior to moving onto this project. The initial cleaning will not be included in the measurement for payment. Payment under this item will only be made if subsequent cleanings are ordered by the Government. Measurement shall be on an "each" basis, meaning one complete cleaning of all equipment required for this contract. Subsequent cleanings necessitated by the Contractor's actions but not directed by the Government will not be included in the measurement for payment.

151.03_0116_us_03_30_2005

151.03

Add the following to the first paragraph:

Include all costs associated with the cleaning of equipment in the unit bid price for Mobilization:

Add the following to the beginning of paragraph (a).

If applicable,

155 - Schedules for Construction Contracts

155.00_nat_us_05_11_2004

155 Delete.

Delete Section 155 in its entirety.

156 - Public Traffic

156.00_nat_us_04_17_2007

Delete Section 156 in its entirety and replace with the following:

Description

156.01 This work consists of controlling and protecting public traffic adjacent to and within the project.

Material

156.02 Conform to the MUTCD and the following Sections and Subsections:

Construction sign panels	633
Retro-reflective sheeting	718.01
Temporary concrete barrier	618
Temporary plastic fence	710.11
Temporary traffic control devices	718.22

156.03 General. Unless otherwise provided for in Table 156-1, keep existing roads open to all traffic during road improvement work, and maintain them in a condition that will adequately accommodate traffic. Delays may not exceed 60 minutes at any one time followed by an open period of no less than 15 minutes. The Contractor shall give the Government 14 days notice before closing any roads.

Perform no work that interferes or conflicts with traffic or existing access to the roadway surface until a traffic control plan has been approved. Post construction signs and traffic control devices in conformance with MUTCD. All required signs will be in place and approved prior to beginning work on project.

If the Contractor agrees in writing to allow public traffic to use a new road being constructed prior to completion, it will be considered an existing road for traffic control purposes.

156.04 Temporary Traffic Control. Install and maintain temporary traffic control devices adjacent to and within the project as required by the approved traffic control plan and the MUTCD. Install and maintain traffic control devices as follows:

(a) Furnish and install traffic control devices before the start of construction operations.
(b) All detours outside of clearing limits will be approved in writing by the Contracting Officer as part of the traffic control plan.
(c) Install only those traffic control devices needed for each stage or phase.
(d) Relocate temporary traffic control devices as necessary.

(e) Remove devices that no longer apply to the existing conditions.
(f) Immediately replace any device that is lost, stolen, destroyed, or inoperative.
(g) Keep temporary traffic control devices clean.
(h) Remove all temporary traffic control devices upon contract completion or when approved.
(i) When required, use flaggers certified by the American Traffic Safety Services Association, the National Safety Council, the International Municipal Signal Association, a state agency, or other acceptable organization. Perform the work described under MUTCD Part 6. Use type III, VII, VIII, or IX retroreflective sheeting on flagger paddles. Do not use flags. Flaggers must wear high visibility safety apparel as required by MUTCD 6E.02.

156.05 Temporary Closures. Road segments may be closed as shown in Table 156-1. The maximum consecutive days of closure shall be followed by a minimum number of consecutive days open to traffic as shown. Maintain traffic control devices during closure period(s). Appropriate barricades and signs will be erected and maintained as shown in the traffic control plan or as otherwise designated.

Prior to closing roads during construction, give written notice to the Contracting Officer at least 10 days in advance.

Table 156-1
Temporary Road Closures

Road Number	From Terminus	To Terminus	Maximum Consecutive Days of Closure	Minimum Consecutive Days Open

156.06 Acceptance. Public traffic work will be evaluated under Subsection 106.02.

Measurement and Payment

156.07 Do not measure Public Traffic for payment. Compensation is made as an indirect payment.

156.03_nat_us_02_24_2005

156.03 Accommodating Traffic During Work.

Delete the following from the last paragraph:

according to Subsection 106.07(b)

156.04_nat_us_02_24_2005

156.04 Maintaining Roadways During Work.

(a) Add the following:

Do not construct detours outside of the clearing limits or use alternate route detours without the approval of the CO.

156.08_nat_us_02_24_2005

156.08 Traffic and Safety Supervisor.

Delete this subsection in its entirety.

157 - Soil Erosion Control

157.03_0510_us_01_20_2005

157.03 General.

Delete the first two paragraphs and add the following:

Submit an Erosion Control Plan detailing permanent and temporary control measures to minimize erosion and sedimentation during and after construction according to the contract specifications, contract permits, Section 107, and this Section. Contract permits amend the requirements of this Section. Do not modify the type, size, or location of any control or practice without approval. Submit the erosion control plan proposal at least 7 days before operations begin to the Government for approval.

Reflect in the erosion control plan special concerns and measures necessary to protect resources and government improvements. Include:

1. The construction activities and sequence of implementation relating to specific erosion control measures.

2. The location and type of permanent controls to be implemented during construction.

3. The location and type of temporary controls to be implemented during construction.

4. For work in stream channels with running water a detailed dewatering plan.

5. For work in stream channels without flowing water describe level of ground and vegetative disturbance and measures to reduce potential sediment delivery.

6. Describe what monitoring will take place.

Add to the third paragraph:

Upon completion of construction at the site, all temporary dewatering materials and equipment are to be removed from Government property.

157.08 Water Crossings.

Add the following:

At any channel crossing where there is running water dewater by rerouting water flow around the site before and during excavation and embankment operations.

204 - Excavation and Embankment

204.00_01_us_10_11_2006

Delete Section 204 in its entirety and replace with the following.

Description

204.01 This work consists of excavating material, constructing embankments and drainage excavation. This includes furnishing, hauling, stockpiling, placing, disposing, sloping, shaping, compacting, and finishing earthen and rocky material.

204.02 Definitions.

(a) Excavation. Excavation consists of the following:

(1) Roadway excavation. All material excavated from within the right-of-way or easement areas, except subexcavation covered in (2) below and structure excavation covered in Sections 208 and 209. Roadway excavation includes all material encountered regardless of its nature or characteristics.

(2) Subexcavation. Material excavated from below subgrade elevation in cut sections or from below the original groundline in embankment sections. Subexcavation does not include the work required by Subsections 204.05, 204.06(b), and 204.06(c).

(3) Borrow excavation. Material used for embankment construction that is obtained from outside the roadway prism. Borrow excavation includes unclassified borrow, select borrow, and select topping.

(b) Embankment construction. Embankment construction consists of placing and compacting roadway or borrow excavation. This work includes:

(1) Preparing foundation for embankment;
(2) Constructing roadway embankments;
(3) Benching for side-hill embankments;
(4) Constructing dikes, ramps, mounds, and berms; and
(5) Backfilling subexcavated areas, holes, pits, and other depressions.

(c) Conserved topsoil. Excavated material conserved from the roadway excavation and embankment foundation areas that is suitable for growth of grass, cover crops, or native vegetation.

(d) Waste. Excess and unsuitable roadway excavation and subexcavation that cannot be used.

Material

204.03 Conform to the following Subsections:

Backfill material	704.03
Select borrow	704.07
Select topping	704.08
Topping	704.05
Unclassified borrow	704.06
Water	725.01

Construction Requirements

204.04 Preparation for Roadway Excavation and Embankment Construction. Clear the area of vegetation and obstructions according to Sections 201 and 203.

204.05 Reserved.

204.06 Roadway Excavation. Excavate as follows:

(a) General. Do not disturb material and vegetation outside the construction limits.

Incorporate only suitable material into embankments. Replace any shortage of suitable material caused by premature disposal of roadway excavation

At the end of each day's operations, shape to drain and compact the work area to a uniform cross-section. Eliminate all ruts and low spots that could hold water.

Retrieve material deposited outside of the clearing limits as directed by the Government.

(b) Rock cuts. Blast rock according to Section 205. Excavate rock cuts to 6 inches below subgrade within the roadbed limits. Backfill to subgrade with topping or with other suitable material. Compact the material according to Subsection 204.11 When blasting rock, use blasting methods according to Subsection 205.08.

(c) Earth cuts. Scarify earth cuts to 6 inches below subgrade within the roadbed limits. Compact the scarified material according to Subsection 204.11.

(d) Pioneer Roads. Road pioneering, slash disposal, and grubbing of stumps may proceed concurrently with excavation. Conduct excavation and placement operations so material to be treated under Section 201 will not be incorporated into the roadway

unless specified in the slash treatment method. Maintain drainage during pioneering operations.

Remove snow and ice in advance of the work and deposit beyond the roadway limits in a manner that will not waste material or generate sediment. Do not incorporate snow and ice into embankments. Place snow or ice in a manner to prevent resource damage.

(e) Drainage Excavation. Drainage excavation includes construction of all ditches, minor channel changes, drainage dips, critical dips, lead-off ditches, catchbasins, surface water deflectors, and other minor drainage structures. Compact by Method (f) unless otherwise shown on the plans. Excavate on a uniform grade between control points.

204.07 Subexcavation. Excavate material to the limits as designated. Take cross-sections according to Section 152. Prevent unsuitable material from becoming mixed with the backfill. Dispose of unsuitable material according to Subsection 204.14. Backfill the subexcavation with topping, or other suitable material. Compact the material according to Subsection 204.11.

204.08 Borrow Excavation. Use all suitable roadway excavation in embankment construction. Do not use borrow excavation when it results in excess roadway excavation. Deduct excess borrow excavation from the appropriate borrow excavation quantity.

Obtain borrow source acceptance according to Subsection 105.02. Develop and restore borrow sources according to Subsection 105.03. Do not excavate beyond the established limits. When applicable, shape the borrow source to permit accurate measurements when excavation is complete.

204.09 Preparing Foundation for Embankment Construction. Prepare foundation for embankment construction as follows:

(a) Embankment less than 4 feet high over natural ground. Unless otherwise designated by the Government, remove topsoil. Break up the ground surface to a minimum depth of 6 inches by plowing or scarifying. Compact the ground surface according to Subsection 204.11.

(b) Embankments over an existing asphalt, concrete, or gravel road surface. Scarify gravel roads to a minimum depth of 6 inches. Scarify or pulverize asphalt and concrete roads to 6 inches below the pavement. Reduce all particles to a maximum size of 6 inches and produce a uniform material. Compact the surface according to Subsection 204.11.

(c) Embankment across ground not capable of supporting equipment. Dump successive loads of embankment material in a uniformly distributed layer to construct the lower portion of the embankment. Limit the layer thickness to the minimum depth necessary to support the equipment.

(d) Embankment on an existing slope steeper than 1V:3H. Cut horizontal benches in the existing slope to a sufficient width to accommodate placement and compaction operations and equipment. Bench the slope as the embankment is placed and

compacted in layers. Begin each bench at the intersection of the original ground and the vertical cut of the previous bench.

204.10 Embankment Construction. Incorporate only suitable roadway excavation material into the embankment. When the supply of suitable roadway excavation is exhausted, furnish unclassified borrow to complete the embankment. Obtain written approval before beginning construction of embankments over 6 feet high at subgrade centerline. Construct embankments as follows:

(a) General. At the end of each day's operations, shape to drain and compact the embankment surface to a uniform cross-section. Eliminate all ruts and low spots that could hold water.

During all stages of construction, route and distribute hauling and leveling equipment over the width and length of each layer of material.

Compact embankment side slopes flatter than 1V:1.75H with a tamping type roller or by walking with a dozer. For slopes 1V:1.75H or steeper, compact the slopes as construction of the embankment progresses.

Where placing embankment on one side of abutments, wing walls, piers, or culvert headwalls, compact the material using methods that prevent excessive pressure against the structure.

Where placing embankment material on both sides of a concrete wall or box structure, conduct operations so compacted embankment material is at the same elevation on both sides of the structure.

Where structural pilings are placed in embankment locations, limit the maximum particle size to 4 inches.

(b) Embankment within the roadway prism. Place embankment material in horizontal layers not exceeding 12 inches in compacted thickness. Incorporate oversize boulders or rock fragments into the 12-inch layers by reducing them in size or placing them individually as required by (c) below. Compact each layer according to Subsection 204.11 before placing the next layer.

Material composed predominately of boulders or rock fragments too large for 12-inch layers may be placed in layers up to 24 inches thick. Incorporate oversize boulders or rock fragments into the 24-inch layer by reducing them in size or placing them individually according to (c) below. Place sufficient earth and smaller rocks to fill the voids. Compact each layer according to Subsection 204.11 before placing the next layer.

(c) Individual rock fragments and boulders. Place individual rock fragments and boulders greater than 24 inches in diameter as follows:

(1) Reduce rock to less than 48 inches in the largest dimension.

(2) Distribute rock within the embankment to prevent nesting.

(3) Place layers of embankment material around each rock to a depth not greater than that permitted by (b) above. Fill all the voids between rocks.

(4) Compact each layer according to Subsection 204.11 before placing the next layer.

(d) Embankment outside of roadway prism. Where placing embankment outside the staked roadway prism, place material in horizontal layers not exceeding 24 inches in compacted thickness. Compact each layer according to Subsection 204.11.

204.11 Compaction. Compact the embankment using one of the following methods as specified:

(a) Compaction A. Use AASHTO T 27 to determine the amount of material retained on a Number 4 sieve. If there is more than 80 percent retained on the No. 4 sieve use procedure (1). If there is 50 to 80 percent retained on the No. 4 sieve use procedure (2). If there is less than 50 percent retained on the No. 4 sieve use procedure (3).

(1) Adjust the moisture content to a level suitable for compaction. Fill the interstices around rock with earth or other fine material as practical. Use compression-type rollers at speeds less than 6 feet per second and vibratory rollers at speeds less than 3 feet per second. Compact each layer of material full width with one of the following and until there is no visible evidence of further consolidation.

(a) Four roller passes of a vibratory roller having a minimum dynamic force of 40,000 pounds impact per vibration and a minimum frequency of 1000 vibrations per minute.

(b) Eight roller passes of a 20-ton compression-type roller.

(c) Eight roller passes of a vibratory roller having a minimum dynamic force of 30,000 pounds impact per vibration and a minimum frequency of 1000 vibrations per minute.

Increase the compactive effort for layers deeper than 12 inches as follows:

- For each additional 6 inches or fraction thereof, increase the number of roller passes in (a) above by four passes.
- For each additional 6 inches or fraction thereof, increase the number of roller passes in (b) and (c) above, by eight passes.

(2) Use AASHTO T 99 to determine the optimum moisture content of the portion of the material passing a No. 4 sieve. Multiply this number by the percentage of material passing a No. 4 sieve, and add 2 percent to determine the optimum moisture content of the material. Adjust the moisture content of material classified A-1 through A-5 to a moisture content suitable for compaction. Adjust the moisture content of material classified A-6 and A-7 to within 2 percent of the optimum moisture content.

Use compression-type rollers at speeds less than 6 feet per second and vibratory rollers at speeds less than 3 feet per second. Compact each layer of material full width according to (1) above.

(3) Classify the material according to AASHTO M 145. For material classified A-1 or A-2-4, determine the maximum density according to AASHTO T 180,

method D. For other material classifications, determine the optimum moisture content and maximum density according to AASHTO T 99, method C.

Adjust the moisture content of material classified A-1 through A-5 to a moisture content suitable for compaction. Adjust the moisture content of material classified A-6 and A-7 to within 2 percent of the optimum moisture content.

Use compression-type or vibratory rollers. Compact each layer of material full width to at least 95 percent of the maximum density. Determine the in-place density and moisture content according to AASHTO T 310 or other approved test procedures. When required, use AASHTO T 224 to correct for coarse particles.

(b) **Compaction B.** Place material by end dumping to the minimum depth needed for operation of spreading equipment. Adjust the moisture content of the material to obtain a mass that will not visibly deflect under the load of the hauling and spreading equipment. Operate compaction equipment over the full width of each layer until there is no visible evidence of further consolidation or, if when a sheepsfoot roller is used, the roller "walks out" of the layer. Make at least three complete passes.

(c) **Compaction C.** Place material by end dumping to the minimum depth needed for operation of spreading equipment. Level and smooth each embankment layer before placing the next layers. Operate hauling and spreading equipment uniformly over the full width of each layer. Construct a solid embankment with adequate compaction by working smaller rock and fines in with the larger rocks to fill the voids, and by operating hauling and spreading equipment uniformly over the full width of each layer as the embankment is constructed.

(d) **Compaction D.** Hauling and Spreading Equipment. Adjust the moisture content to a level suitable for compaction. Compact the material by operating equipment over the full width of the roadway.

(e) **Compaction E**. Roller Compaction. Adjust the moisture content to a level suitable for compaction. Operate Rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:

(1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

(4) Sheepsfoot, tamping, or grid rollers capable of exerting a force of 250 lbs/inch of width of roller drum.

(f) **Compaction F.** Mechanical Tamper. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each 6 inch layer with a minimum of three complete passes with a mechanical tamper.

204.12 Ditches. Slope, grade, and shape ditches. Remove all projecting roots, stumps, rock, or similar matter. Maintain all ditches in an open condition and free from leaves, sticks, and other debris.

Form furrow ditches by plowing or using other acceptable methods to produce a continuous furrow. Place all excavated material on the downhill side so the bottom of the ditch is approximately 18 inches below the crest of the loose material. Clean the ditch using a hand shovel, ditcher, or other suitable method. Shape to provide drainage without overflow.

204.13 Sloping, Shaping, and Finishing. Complete slopes, ditches, culverts, riprap, and other underground minor structures before placing aggregate courses. Slope, shape, and finish as follows:

(a) Sloping. Leave all earth slopes with uniform roughened surfaces, except as described in (b) below, with no noticeable break as viewed from the road. Except in solid rock, round tops and bottoms of all slopes including the slopes of drainage ditches. Round material overlaying solid rock to the extent practical. Scale all rock slopes. Slope rounding is not required on tolerance class D though M roads.

If a slide or slipout occurs on a cut or embankment slope, remove or replace the material, and repair or restore all damage to the work. Bench or key the slope to stabilize the slide. Reshape the cut or embankment slope to an acceptable condition.

(b) Stepped slopes. Where required by the contract, construct steps on slopes of 1⅓V:1H to 1V:2H. Construct the steps approximately 18 inches high. Blend the steps into natural ground at the end of the cut. If the slope contains nonrippable rock outcrops, blend steps into the rock. Remove loose material found in transitional area. Except for removing large rocks that may fall, scaling stepped slopes is not required.

(c) Shaping. Shape the subgrade to a smooth surface and to the cross-section required. Shape slopes to gradually transition into slope adjustments without noticeable breaks. At the ends of cuts and at intersections of cuts and embankments, adjust slopes in the horizontal and vertical planes to blend into each other or into the natural ground.

(d) Finishing. Finish the roadbed to be smooth and uniform, and shaped to conform to the typical sections. Remove unsuitable material from the roadbed and replace it with suitable material. Finish roadbeds to the tolerance class shown in table 204-2.Ensure that the subgrade is visibly moist during shaping and dressing. Scarify to 6 inches below the bottom of low sections, holes, cracks, or depressions and bring back to grade with suitable material. Maintain proper ditch drainage.

For surfaced roads, remove all material larger than 6 inches from the top 6 inches of the roadbed.

For unsurfaced roads, use one of the following methods to finish the roadbed:

(1) <u>Method A</u>. Remove all material larger than 6 inches from the top 6 inches of the roadbed and replace with suitable material.

(2) Method B. Use a vibratory grid roller or approved equal with a minimum weight of 10 tons. Roll at least 5 full-width passes or until there is no visible evidence of further consolidation.

(3) Method C. For roads designated as Construction Tolerance Class K, L, or M, finish the roadbed by spreading the excavation. Eliminate rock berms.

204.14 Disposal of Unsuitable or Excess Material. Dispose of unsuitable or excess material at designated sites or legally off of the project.

When there is a pay item for waste, shape and compact the waste material in its final location. Do not mix clearing or other material not subject to payment with the waste material.

204.15 Acceptance. See Table 204-1 for sampling and testing requirements.

Material for embankment and conserved topsoil will be evaluated under Subsections 106.02 and 106.04.

Excavation and embankment construction will be evaluated under Subsections 106.02 and 106.04.

Clearing and removal of obstructions will be evaluated under Sections 201 and 203.

Measurement

204.16 Measure the Section 204 items listed in the bid schedule according to Subsection 109.02 and the following as applicable.

(a) Roadway excavation. Measure roadway excavation in its original position as follows:

(1) Include the following volumes in roadway excavation:

(a) Roadway prism excavation;

(b) Rock material excavated and removed from below subgrade in cut sections;

(c) Unsuitable material below subgrade and unsuitable material beneath embankment areas when a pay item for subexcavation is not shown in the bid schedule;

(d) Ditches, except furrow ditches measured under a separate bid item;

*(e)*Topsoil;

(f) Borrow material used in the work when a pay item for borrow is not shown in the bid schedule;

(g) Loose scattered rocks removed and placed as required within the roadway;

(h) Conserved material taken from stockpiles and used in Section 204 work; and

(i) Slide and slipout material not attributable to the Contractor's method of operation.

(2) Do not include the following in roadway excavation:

(a) Overburden and other spoil material from borrow sources;

(b) Overbreakage from the backslope in rock excavation;

(c) Water or other liquid material;

(d) Material used for purposes other than required;

(e) Roadbed material scarified in place and not removed;

(f) Material excavated when stepping cut slopes;

(g) Material excavated when rounding cut slopes;

(h) Preparing foundations for embankment construction;

(i) Material excavated when benching for embankments;

(j) Slide or slipout material attributable to the Contractor's method of operation;

(k) Conserved material taken from stockpiles constructed at the option of the Contractor; and

(l) Material excavated outside the established slope limits.

(3) When both roadway excavation and embankment construction pay items are shown in the bid schedule, measure the following as roadway excavation only:

(a) Unsuitable material below subgrade in cuts and unsuitable material beneath embankment areas when a pay item for subexcavation is not shown in the bid schedule;

(b) Slide and slipout material not attributable to the Contractor’s method of operations; and

(c) Drainage ditches, channel changes, and diversion ditches.

(b) Unclassified borrow, select borrow, and select topping. When measuring by the cubic yard measure in its original position. If borrow excavation is measured by the cubic yard in place, take initial cross-sections of the ground surface after stripping overburden. Upon completion of excavation and after the borrow source waste material is returned to the source, retake cross-sections before replacing the overburden.

Do not measure borrow excavation used in place of excess roadway excavation.

(c) Embankment construction. Measure embankment construction in its final position. Do not make deductions from the embankment construction quantity for the volume of minor structures.

(1) Include the following volumes in embankment construction:

(a) Roadway embankments;

(b) Material used to backfill subexcavated areas, holes, pits, and other depressions;

(c) Material used to restore obliterated roadbeds to original contours; and

(d) Material used for dikes, ramps, mounds, and berms.

(2) Do not include the following in embankment construction:

(a) Preparing foundations for embankment construction;

(b) Adjustments for subsidence or settlement of the embankment or of the foundation on which the embankment is placed; and

(c) Material used to round fill slopes.

(d) Rounding cut slopes. Measure rounding cut slopes horizontally along the centerline of the roadway if a pay item for slope rounding is included in the bid schedule. If a pay item for slope rounding is not included in the bid schedule slope rounding will be considered subsidiary to excavation.

(e) Waste. Measure waste by the cubic yard in its final position. Take initial cross-sections of the ground surface after stripping over burden. Upon completion of the waste placement, retake cross-sections before replacing overburden.

(f) Slope scaling. Measure slope scaling by the cubic yard in the hauling vehicle.

Payment

204.17 The accepted quantities will be paid at the contract price per unit of measurement for the Section 204 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Table 204-1
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Topping (704.05) & unclassified borrow (704.06)	Measured and tested for conformance (106.04)	Classification	—	AASHTO M 145	1 per soil type	Processed material before incorporating in work	Yes, when requested	Before using in work
		Moisture-density	—	AASHTO T 180, method D[(1)] or T 99, method C[(1)]	1 per soil type but not less than 1 per 13,000 yd^3	"	"	"
		Compaction	—	AASHTO T 310 or other approved procedures	1 per 6000 yd^2 but not less than 1 per layer	In-place	—	Before placing next layer
Select borrow (704.07 & Select topping (704.08)	Measured and tested for conformance (106.04)	Classification	—	AASHTO M 145	1 per soil type but not less than 1 for each day of production	Processed material before incorporating in work	Yes, when requested	Before using in work
		Gradation	—	AASHTO T 27 & T 11	"	"	"	"
		Liquid limit	—	AASHTO T 89	"	"	"	"
		Moisture-density	—	AASHTO T 180, method D[(1)] or T 99, method C[(1)]	1 per soil type but not less than 1 per 13,000 yd^3	"	"	"
		Compaction	—	AASHTO T 310 or other approved procedures	1 per 6000 yd^2 but not less than 1 per layer	In-place	—	Before placing next layer

(1) Minimum of 5 points per proctor

Table 204-1 (continued)
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Earth embankment (204.11, Compaction A)	Measured and tested for conformance (106.04)	Classification	—	AASHTO M 145	1 per soil type	Source of Material	Yes, when requested	Before using in work
		Moisture-density	—	AASHTO T 180, method D[(1)] or T 99, method C[(1)]	1 per soil type but not less than 1 per 13,000 yd^3	"	"	"
		Compaction	—	AASHTO T 310 or other approved procedures	1 per 3500 yd^2 but not less than 1 per layer	In-place	—	Before placing next layer
Top of subgrade (204.11 Compaction A)	Measured and tested for conformance (106.04)	Compaction	—	AASHTO T 310 or other approved procedures	1 per 2500 yd^2	In-place	—	Before placing next layer

(1) Minimum of 5 points per proctor.

Table 204-2
Construction Tolerances

	Tolerance Class [a]												
	A	**B**	**C**	**D**	**E**	**F**	**G**	**H**	**I**	**J**	**K**	**L**	**M**
Roadbed width (ft)	+0.5	+0.5	+1.0	+1.0	+1.0	+1.0	+1.5	+1.0	+2.0	+2.0	+2.0	+2.0	+2.0
Subgrade elevation (ft)	±0.1	±0.2	±0.2	±0.5	±0.5	±1.0	±1.0	±1.5	±2.0	±3.0	±2.0	±3.0	(c)
Centerline alignment (ft)	±0.2	±0.2	±0.5	±0.5	±1.0	±1.0	±1.5	±1.5	±2.0	±3.0	±3.0	±5.0	(c)
Slopes, excavation, and embankment (% slope[b])	±3	±5	±5	±5	±5	±5	±10	±10	±10	±10	±20	±20	±20

(a) Maximum allowable deviation from construction stakes and drawings.
(b) Maximum allowable deviation from staked slope measured from slope stakes or hinge points.
(c) Unless otherwise shown the centerline alignment and subgrade elevation, as built, have no horizontal curves with a radius of less than 80 feet, and no vertical curves with a curve length of less than 80 feet when the algebraic difference in the grade change is less than 10 percent, or a curve length of less than 100 feet when the algebraic difference of

212 - Linear Grading

212.00_nat_us_05_19_2005

Delete the entire specification and replace it with the following:

Description

212.01 This work consists of clearing and grubbing, excavation and embankment, and erosion control to construct roadways and associated features.

Construction Requirements

212.02 Clearing & Disposal. Protect construction stakes and construction control markers. Remove or treat all trees, snags, downed timber, brush, and stumps within the clearing limits.

Immediately remove slash deposited in stream courses.

Fell all dead trees that are outside the clearing limits and that lean toward the road and are tall enough to reach the roadbed.

Leave stump heights less than 12 inches or one-third of the stump diameter; whichever is greater, measured on the side adjacent to the highest ground. Leave felled trees outside the clearing limits in place, and treat them no further unless otherwise designated.

Do not cut vegetation less than 3 feet in height and less than 3 inches in diameter that is within the clearing limits but beyond the roadway and not in a decking area and that does not interfere with sight distance along the road.

Merchantable Timber

Deck all merchantable timber at approved locations according to 201.04(f).

Unmerchantable Timber and Large Construction Slash

Scatter construction slash outside the clearing limits without damaging trees. Limb all logs. Place logs and stumps away from trees, positioned so they will not roll, and are not on top of one another. Limb and scatter other construction slash to reduce slash concentrations.

212.03 Pioneering. Do not undercut the final back slope during pioneering operations. Deposit material inside the roadbed limits. Do not restrict drainage.

212.04 Grubbing. Within the clearing limits remove stumps with less than 6 inches of cover.

212.05 Excavation & Embankment. Construct the roadway to the required template. Protect backslopes from being undercut. Embankment may be placed by side casting and end dumping.

Locate and use borrow material, and remove and treat unsuitable or excess material.

Place rocks that are too large to be incorporated in the embankment outside the traveled way on the downhill side so that they will not roll, obstruct drainage, or hinder roadbed use and maintenance.

Leave slopes that are to be seeded in a roughened condition.

Use a crawler tractor with a dozer blade to shape and finish the roadbed. Provide for drainage of surface water, unless otherwise designated. Do not permit individual rocks in the roadbed to protrude more than 4 inches above the subgrade. A motor grader finish is not required.

Do not encroach on stream channels, wetlands, or extend beyond right-of-way or easement limits. Do not make alignment or profile grade adjustments that adversely affect drainage. Construct the roadbed within the following grading tolerances:

(a) Alignment (centerline). Alignment may be shifted a maximum of 10 feet left or right of the planned centerline. Curve radii may be reduced by up to 50 percent. Do not construct curves with radii less than 100 feet. Compound curves are permitted. Traveled way tolerance is (+) 2 feet unless otherwise designated.

(b) Profile grade. Profile grade may be shifted a maximum of 5 feet up or down from the plan elevation provided the new grade tangent does not vary more than 2 percent from the plan grade tangent. Connect revised forward and back grade tangents with a uniform vertical curve consistent with the design.

212.06 Drainage. Install culverts and other drainage structures according to Section 602 and Section 209.

212.07 Erosion Control. Install erosion control measures and seeding according to the drawings and Section 625.

212.08 Acceptance. Linear grading will be evaluated under Subsections 106.02 and 106.04.

Clearing and slash and timber treatment will be evaluated under Sections 201 and 203.

Measurement

212.09 Measure the Section 212 items listed in the bid schedule according to Subsection 109.02 and the following.

Do not measure changes in the clearing and grubbing quantity caused by alignment adjustments under Subsection 212.04.

Payment

212.10 The accepted quantities, measured as provided in Subsection 109.02 and above, will be paid at the contract price per unit of measurement for the Section 212 pay item listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

230 - Roadside Brushing

230.00_01_us_02_14_2005

Description

230.01 This work consists of removing limbs, residual slash, live roadside brush, and small trees between, or obtruding into the designated brushing limits. Brushing areas include turnouts.

Construction Requirements

230.02 Brushing. Cut all brush and small trees (6 inches diameter, or less, at the point of cut) inside the brushing limits and outside the roadbed no higher than 4 inches above ground level (6 inches for machine brushing). If rocks or other obstructions are encountered, cut no higher than 6 inches above the obstruction. Limb live trees with a diameter larger than 6 inches to a height of 14 feet above the road surface.

Cut all brush and trees located on the roadbed as nearly flush to the road surface as possible so stumps will not become a hazard to vehicle tires.

230.03 Windfalls. Limb windfalls lying within or across the brushing limits to a horizontal distance of 10 feet from each shoulder or at the brushing limit, whichever is least. Dispose of windfall material as slash.

230.04 Road Junctions. Do not deposit brushing debris on the roadway of adjoining roads.

230.05 Slash Treatment. Slash is defined as any material cut that has a length greater than 36 inches with a diameter greater than 3 inches at any point. Do not deposit any material in streams, streambeds, culvert inlets or outlets, drainage ways, or cattleguards.

Merchantable timber is all timber meeting the Utilization Standards shown in Table 201-1. All merchantable timber remains the property of the landowner where it was cut, and will be manufactured into logs meeting those Utilization Standards and decked at approved locations on that landowner's property. Deck according to 201.04(f) on each owner's property adjacent to the road in approved locations.

Place all merchantable logs and unmerchantable logs into separate decks at locations agreed to by the landowner.

Use or treat construction slash larger than 3" in diameter and 3' in length by one or more of the following methods, as DESIGNATED IN THE SCHEDULE OF ITEMS:

(1) Windrowing construction slash.

(2) Windrowing large material.

(3) Windrowing and covering.

(4) Scattering.

(5) Burying.

(6) Chipping or grinding.

(7) Piling and burning.

(8) Decking unmerchantable material.

(9) Placement in cutting units.

(10) Removal.

Measurement

230.06 Linear measurements will be horizontal along the road centerline regardless of the amount of work required. Measure the Section 230 items listed in the bid schedule according to Subsection 109.02.

Payment

230.07 The accepted quantities will be paid for at the contract unit price for the Section 230 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Quantities will be the number of miles and fractions thereof along the road centerline, regardless of the amount of work required.

301 - Untreated Aggregate Courses

301.00_05_us_07_27_2005

301.03 General.

Add the following:
Request approval in writing of the roadbed before placing aggregate.
If the aggregate is produced and stockpiled before placement, handle and stockpiled according to Section 320. Establish stockpile sites at locations approved. Clear and grub stockpile sites according to Section 201.

301.04 Mixing and Spreading.

Delete the first two sentences of the first paragraph and add the following:
Adjust the moisture content to obtain a uniform mixture with a moisture content within 2 percent of the optimum moisture content. Spread the aggregate in a uniform layer, with no segregation of size, and to a loose depth that will provide the required compacted thickness.
When placing aggregate over geotextile, place aggregate in a single lift to the full depth specified.
Route and distribute hauling and leveling equipment over the width and length of each layer.

301.05 Compacting.

Delete the first and third paragraphs and add the following:
Compact the aggregate using one of the following methods as specified:
(a) Compaction Method A. Compact the aggregate by operating spreading and hauling equipment.
(b) Compaction Method C. Compact each layer of aggregate to a density of at least 95 per-cent of the maximum density, as determined by AASHTO T 99, method C or D.
(c) Compaction Method D. Compact each layer of aggregate to a density of at least 95 per-cent of the maximum density, as determined by AASHTO T 180, method C or D.
For all compaction methods, blade the surface of each layer during the compaction operations to remove irregularities and produce a smooth, even surface. When a density requirement is specified, determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

301.06 Surface Tolerance.

Add the following:
Thickness and Width requirements:
The maximum variation from the compacted specified thickness is ½ inch. The compacted thickness is not consistently above or below the specified thickness and the average thickness of 4 random measurements for any ½ mile of road segment is within + ¼ inch of the specified thickness.
The maximum variation from the specified width will not exceed +12 inches at any point. The compacted width is not consistently above the specified width and the average of any

four random measurements along any ½ mile of road segment is within +4 inches of the specified width.
301.08(b) Plasticity Index.
Add the following to the first sentence: "and under 703.05(c)(1)".

301.08 Acceptance

Delete the second paragraph and add the following:
Aggregate gradation and surface course plasticity index will be evaluated under Subsection 106.04. Other aggregate quality properties will be evaluated under 106.02 and 106.04.

301.09 Measurement.

Delete the second and third paragraphs and add the following:

Table 301-1 Field Density Requirements.

Table 301-1: Delete laboratory and field density requirements for base, subbase, and surfacing and replace with the following:

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
NC ABC	Measured and tested conformance (Subsection 106.04)	Moisture Density						
		Method C-1	---	R-1 Marshall	“	“	“	Before using in work
		Method D	---	AASHTO T 180	“	“	“	“
		Method D-1	---	R-1 Marshall	“	“	“	“
		Compaction						
		Method C, C-1, D, D-1	---	AASHTO T 310 or other approved procedures	1 per 500 t	In-place	---	Before placing the next layer

Table 301-1: Add the following:

Table 301-1—Acceptance Sampling and Testing Requirements.

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
NC ABC	Measured and tested conformance (Subsection 106.04)	Plastic Limit	-	AASHTO T 90	1 per each 1,000 T	From the windrow or roadbed after processing	Yes	4 Hours

Table 301-1—Acceptance Sampling and Testing Requirements.

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Aggregate Width	Measured and tested conformance (Subsection 106.04)	Width	-	-	4 per each 0.5 mi	Roadbed after processing	-	4 Hours
Aggregate Thickness	Measured and tested conformance (Subsection 106.04)	Thickness	-	-	4 per each 0.5 mi	Roadbed after processing	-	4 Hours
Additive	Measured and tested conformance (Subsection 106.04)	Amount of Additive	-		1 per each 1,000 T	From the windrow or roadbed after processing	No	4 Hours

303 - Road Reconditioning

303.03_0114_us_08_04_2005

303.03 Ditch Reconditioning

Delete the last sentence and add the following:
Dispose of waste as shown on the plans.

303.04 Shoulder Reconditioning

Delete the last sentence and add the following:
Dispose of waste as shown on the plans.

303.05 Roadbed Reconditioning

Delete and add the following:
Repair soft and unstable areas according to Subsection 204.07. Remove all organic, deleterious material larger than 6 inches from the top 6 inches of subgrade. Dispose of waste as shown on the plans. Scarify and shape the traveled way and shoulders at locations and to the depth and width designated on the plans. Remove surface irregularities and shape to provide a uniform surface. Dispose of rock larger than 4 inches brought to the surface during scarification in areas designated on the plans.
For portions of roads not requiring scarification, the roadbed may contain rocks larger than 4 inches provided they do not extend above the finished roadbed surface. Reduce in place or remove rock extending above the finished roadbed surface. Dispose of removed rock in areas designated on the plans.
Compact using the following method as specified:

(a) Compaction A. Operate equipment over the full width.

(b) Compaction B. Operate rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:

(1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

303.07 Roadway Reconditioning

Add the following:
Blade and shape the subgrade for both surfaced and unsurfaced roads when moisture content is suitable for compaction.

303.09 Acceptance

Delete the first sentence.

303.10 Measurement

Delete the first sentence of the third paragraph and replace with:
Measure roadbed reconditioning, aggregate surface reconditioning, roadway reconditioning, and pulverizing by the mile, by the station, or by the square yard.

303.10_10_us_05_23_2005

303.10 Measurement

Modify the third paragraph as follows:

Measure road reconditioning, aggregate surface reconditioning, roadway reconditioning, and pulverizing by the mile, station, foot, or square yard. Measure horizontally along centerline of roadway. Measure the square yard area on horizontal plane. Do not measure isolated areas less than 20 square yards.

602 - Culverts and Drains

602.03 General

Add the following:

Clean and paint damaged coating caused by welding, field cutting, or handling in accordance with AASHTO M 36M and ASTM A 849.

Ensure that the final installed alignment of all pipe allows no reverse grades, and does not permit horizontal and vertical alignments to vary from a straight line drawn from center of inlet to center of outlet by more than 2 percent of pipe center length or 1.0 feet, whichever is less.

602.05 Laying Metal Pipe

Add the following:

Install helically corrugated lock-seam pipe with the seam at the inlet end placed below the horizontal centerline. This, requirement also applies to the outlet end, when less than 5 feet below subgrade.

Road Closure Devices

650.00_nat_us_06_28_2007

Description

650.01 Work. Furnish and install, or install only, road closure devices using fabricated gates and accessories, combination post and rail barriers, concrete barriers, earth mound barriers, boulders, and other devices as specified in the schedule of items and/or shown on the drawings.

Materials

650.02 Requirements. Furnish materials to be used in fabricating gates and barriers. Ensure that all hardware is galvanized in accordance with AASHTO M 232 and meets the requirements of ASTM A 307. Furnish plain or cut washers that are American Standard Washers.

Furnish timber posts, rails, and lumber that meet the requirements of AASHTO M 168. Provide timber of the species and type, and rate of preservative treatment.

Furnish concrete that meets the requirements of Subsection 601.03, method B or C.

Furnish guardrail and fasteners that meet the requirements of Section 710.

Construct earth mound barriers from excavated material adjacent to the barrier location, or from other designated locations.

Construct boulder closures from boulders of a minimum diameter of 36 inches or as listed in the schedule of items, or as supplied by the government.

Construction

650.03 Performance. Place road closure devices at designated locations. Construct all devices to the required dimensions. In assembling gates, perform required welding in accordance with the best modern practice and the applicable requirements of AWS D1.1.

After assembly, clean non-galvanized steel pipe gates and paint them with one coat of zinc-rich primer and two coats of exterior enamel of the required type and color.

Set all posts vertically and embed them to the required depth. Place concrete for embedment against undisturbed earth within an excavation sized to achieve the embedment dimensions. Compact the backfill in 6 inch layers to finished grade.

Boulders for road closure will be placed with a maximum distance of 36 inches between boulders. Unless otherwise specified, the boulders will be embedded 1/3 of their diameter into the ground. The boulders will be a minimum diameter of 36 inches, or as supplied by the Government.

Furnish and install all signs and/or reflective warning markers accessory to the road closure device.

650.04 Acceptance. Construction of road closure devices will be evaluated under Subsections 106.02 and 106.04.

Measurement

650.05 Measure the items listed in the bid schedule according to Subsection 109.02.

Payment

650.06 The accepted quantities, measured as provided in Subsection 109.02 and above, will be paid at the contract price per unit of measurement for the Section 650 pay item listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

703 - Aggregate

703.05_nat_us_12_07_2006

Delete 703.05 and replace with the following:

703.05 Subbase, Base, Surface Course, and Screened Aggregate.

(a) Subbase or base aggregate. Furnish hard, durable particles or fragments of crushed stone, crushed slag, or crushed gravel conforming the following:

(1) Gradation	Table 703-2
(2) Liquid limit, AASHTO T 89	25 max.
(3) Plastic limit, AASHTO T 90	Nonplastic
(4) Los Angeles abrasion, AASHTO T 96	40% max.
(5) Sodium sulfate soundness loss (5 cycles), AASHTO T 104	12% max.
(6) Durability index (coarse), AASHTO T 210	35 min.
(7) Durability index (fine), AASHTO T 210	35 min.
(8) Fractured faces, ASTM D 5821	50% min.
(9) Free from organic matter and lumps or balls of clay	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary. Fine aggregate, material passing the No. 4 sieve, shall consist of natural or crushed sand and fine mineral particles.

(b) Surface course aggregate. Furnish hard, durable particles or fragments of crushed stone, crushed slag, or crushed gravel conforming the following:

(1) Gradation	Table 703-3
(2) Liquid limit, AASHTO T 89	35 max.
(3) Plastic Index, AASHTO T 90	
a) If the percent passing the No. 200 sieve is less than 12%	2 to 9
b) If the percent passing the No. 200 sieve is greater than 12%	Less than 2
(4) Los Angeles abrasion, AASHTO T 96	40% max.
(5) Sodium sulfate soundness loss (5 cycles), AASHTO T 104	12% max.
(6) Durability index (coarse), AASHTO T 210	35 min.
(7) Durability index (fine), AASHTO T 210	35 min.
(8) Fractured faces, ASTM D 5821	75% min.
(9) Free from organic matter and lumps or balls of clay	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Do not furnish material that contains asbestos fibers.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary. Fine aggregate, material passing the No. 4 sieve, shall consist of natural or crushed sand and fine mineral particles.

(c) Screened aggregate – Furnish hard, durable particles or fragments of stone, slag, or gravel conforming the following:

(1) Gradtion	Table 703-16
(2) Plastic Index, AASHTO T 90	Less than 9
(3) Los Angeles abrasion, AASHTO T 96	55% max.
(4) Free from organic matter and lumps or balls of clay.	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary.

Delete Table 703-2 and replace with the following:

Table 703-2
Target Value Ranges for Subbase and Base Gradation

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)				
	Grading Designation				
	A (Subbase)	B (Subbase)	C (Base)	D (Base)	E (Base)
2½ inch	100				
2 inch	97 – 100	100	100		
1½ inch		97 – 100			
1 inch	65 – 79 (6)		80 – 100 (6)	100	
3/4 inch			64 – 94 (6)	86 – 100 (6)	100
1/2 inch	45 – 59 (7)				
3/8 inch			40 – 69 (6)	51 – 82 (6)	62 – 90 (6)
No. 4	28 – 42 (6)	40 – 60 (8)	31 – 54 (6)	36 – 64 (6)	36 – 74 (6)
No. 40	9 – 17 (4)			12 – 26 (4)	12 – 26 (4)
No. 200	4.0 – 8.0 (3)	4.0 – 12.0 (4)	4.0 –7.0 (3)	4.0 – 7.0 (3)	4.0 – 7.0 (3)

( ) The value in the parentheses is the allowable deviation (±) from the target values..

Delete Table 703-3 and replace with the following:

Table 703-3
Target Value Ranges for Surface Gradation

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)					
	Grading Designation					
	F	G	H	S	T	U
1 1/2 inch	100(			100		
1 inch	97-100	100		72 – 92 (6)	100	
3/4 inch	76-89 (6)	97 - 100	97 - 100			100
1/2 inch					71 – 91 (6)	
3/8 inch	56-68 (6)	70 – 80 (6)	80 – 92 (6)	51 – 71 (6)		71 – 90 (6)
No. 4	43-53 (7)	51 – 63 (7)	58 – 70 (7)	36 – 53 (7)	43 – 60 (7)	50 – 68 (7)
No. 8				26 – 40 (6)	30 – 46 (6)	34 – 51 (6)
No. 16	23-32 (6)	28 – 39 (6)	28 – 40 (6)			
No. 40	15-23 (5)	19 – 27 (5)	16 – 26 (5)	14 – 25 (5)	16 – 28 (5)	19 – 30 (5)
No. 200	10.0-16.0 (4)	10.0 – 16.0 (4)	9.0 – 14.0 (4)	8.0 – 15.0 (4)	8.0 – 15.0 (4)	8.0 – 15.0 (4)

( ) The value in the parentheses is the allowable deviation (±) from the target values.
If the plasticity index (PI) is greater than 0, the TV range for the No. 200 sieve size is 8-12 (4).

Add Table 703-16:

Table 703-16

Gradation Requirements for Screened Aggregate

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)						
	Grading Designation						
	L	M	N	O	P	Q	R
6 inch	100	100					
4 inch			100	100			
3 inch					100	100	
2 inch							100
No. 4		15-45		15-45		15-45	

703.06_nat_us_03_02_2005

703.10(e) Flakiness Index.

Delete and replace with the following:

Flakiness Index, FLH T 508 30% max.

703.10(i) Adherent Coating.

Add the following:

Adherent coating on the aggregate, FLH T 512 0.5% max.

703.07_nat_us_03_02_2005

Table 703-2 Correction

Include the following substitution

In Table 703-2, delete the "436 – 74 (6)" percent by mass passing for grading E (base) No. 4 sieve size and substitute "36 – 74 (6)."