


RELIEF VALVE CONNECTION (CLAY AND
BAILEY MODEL 37X, PART NUMBER
0037-03-2030, PT COUPLING 2"
DSL2 FEMALE COUPLER X FEMALE
THREAD AND PT COUPLING 2" MALE
ADAPTER X MALE THREAD.

VAPOR REMOVAL
CONNECTION (PT
COUPLING 2" VSL2
DUST CAP AND 2" MALE
ADAPTER X MALE
THREAD). WHEN THE
VAPOR HOSE IS NOT
INSTALLED THIS
CONNECTION SHOULD
BE CAPPED.

SIGHT GLASS (JOHN
C ERNST 2" MODEL
322) TO DETERMINE
FUEL LEVEL.

GASOLINE FILL/GELLING AGENT
DISPENSER PORT (PT COUPLING 2"
VSL2 DUST CAP AND 2" MALE
ADAPTER X MALE THREAD). USE THIS
PORT FOR FILLING WITH A SERVICE
STATION TYPE NOZZLE. WHEN FILLING
IS COMPLETE ATTACH THE GELLING
AGENT DISPENSER TO THIS PORT
WHEN NOT USED FOR FILLING OR
DISPENSING GELLING AGENT THIS
PORT SHOULD BE CAPPED.

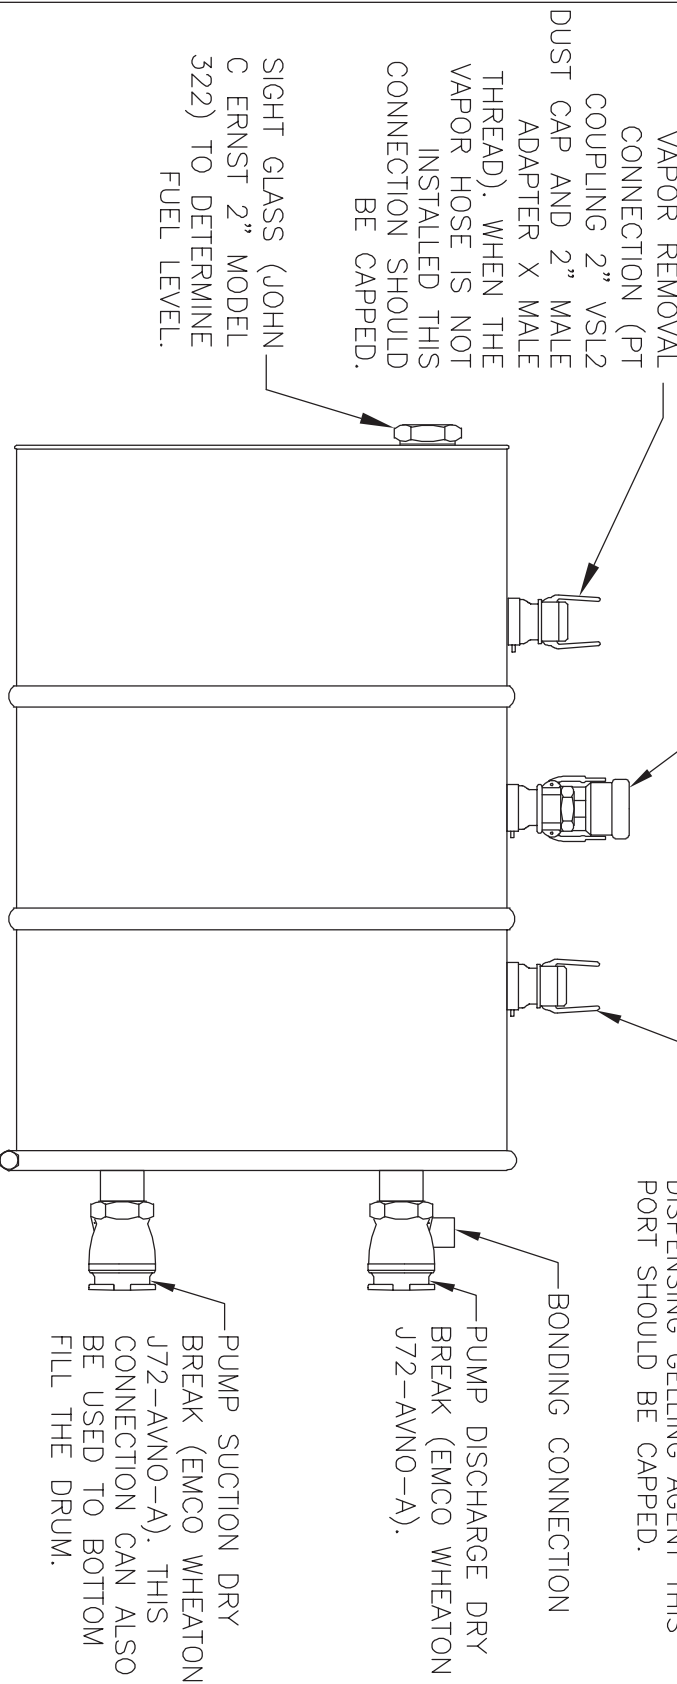

MIX TRANSFER SYSTEM DRUM CONFIGURATION

NOTE: RELIEF VALVE INSTALLATION IS REQUIRED