

Unit # 1

**PRESALE DATA**

Activity Code <b>220 Commercial Thin</b>							
	Species	Size	Tr/Ac	BA/Ac	Vol/Ac	Age	Msltoe
Leave Tree Data	N/A	<7"	N/A	N/A	N/A	N/A	No

The Plant Association is ABAM/RHMA3/VAAL/COCA13

(Treatment Objectives, Silv, Prescription, Recommended Stocking Level, Logging Plan, Sale Contract Requirements, Etc.)

- Remove all Douglas-fir, true fir, hemlock and western white pine marked with blue tree marking paint above and below stump height C2.35# (Option1).
- Mechanized, full suspension required, C6.42#.
- All equipment is prohibited within 20 feet from banks and 30 feet from approximately 150 feet of unstable bank in the NW corner, C6.42#.
- Directionally fell timber away from improvements (PI), C6.41#.
- Skidroad location on the lake bed shall not extend above the high water mark or extend more than 30 feet below the same high water mark, C6.42#
- Log barriers on FS road 061 shall be returned to their original location after operations are complete, C6.42#
- Jacking, wedging, winching, pulling and/or pushing with equipment is required to fell trees away from improvements, C6.41#
- Stumps shall be cut 4 inches or less, measured on the high side of the stump, C6.41#
- Consult with district Hydrologist and Fish Biologist on slash mat placement prior to operations.
- Consult with district Hydrologist and Fish Biologist if earthmoving is required at the proposed landing location.

Est. Net Volume To Be Cut 109 CCF Saw	Treatment Plan Completed Date 09/15 By : Detroit IDT
--	---

Indicate Method Used to Mark or Designate Boundaries and/or Trees.  
Boundary marked with yellow clear cut cards, yellow flashers and orange paint above and below stump height.  
Indicate Type of Cruise, Sample Size, Intensity, Grading, Etc.  
Cut all DF, H, WP and TF. Cruise: STR w/ 65 trees cruised. Strata A, Sampling error: 20%

Cruise Completed By R. Mickey Date 08/15	Designation Completed By R. Mickey Date 08/15
--	---

Work Planned on Activity Slash Treatment By C. Donaldson Date 09/15	Record For: Reforestation-TSI By: S. Crowder Date 09/15	Appraisal Completed By R. Mickey Date 09/15
--	--	---


**Project Area Map**

**EA Name** City of Detroit Root Rot

T. 10 S. R. 05 E., 02


Stand # 4027055	Ref	Acres 1
Aspect W	Elevation 1600	Slope 5%
Prepared By Rob Mickey	Project Name City of Detroit Root Rot	
Date 09/03/15	Unit # 1	

**City of Detroit Root Rot**

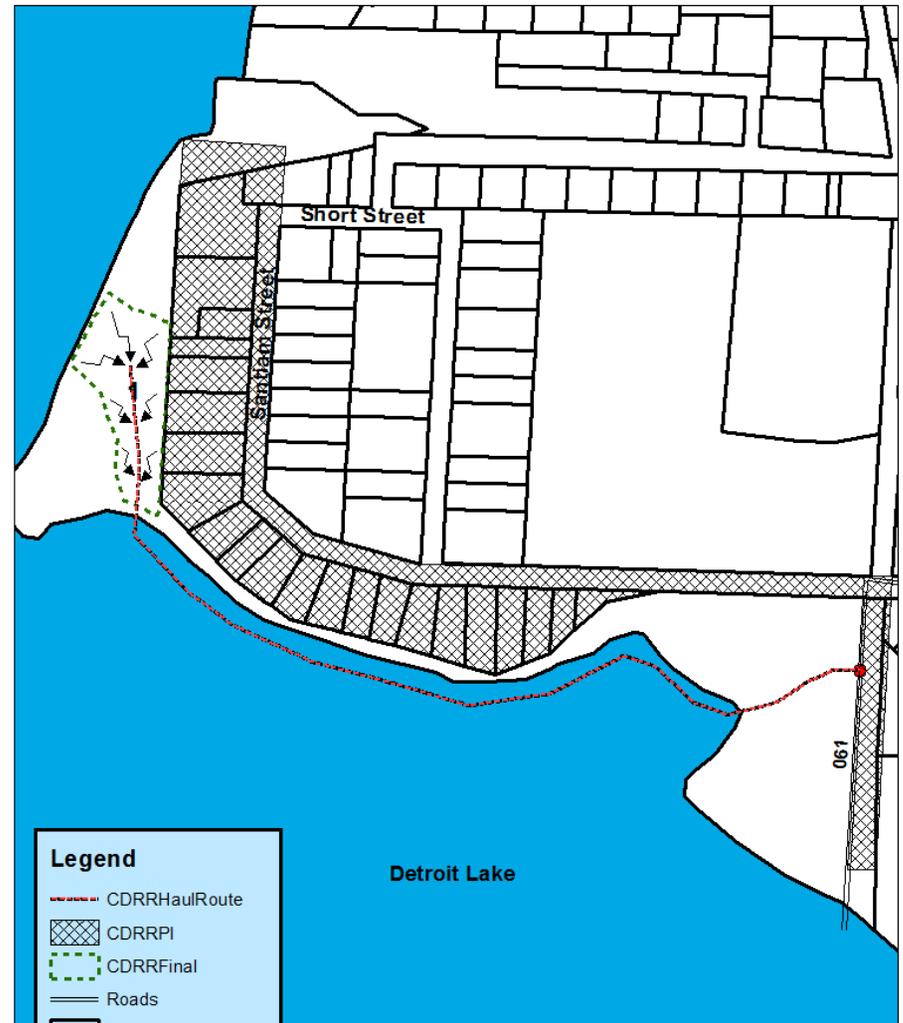

**Legend**

- CDRRHaulRoute
- ▨ CDRRPI
- - - CDRRFinal
- Roads
- taxlot
- WaterBody
- GBYardingDirection



N  
RM 5/5/2014