Middle Fork (MP)

Stanislaus National Forest — Groveland Ranger District

Sale Area Map

DRAFT

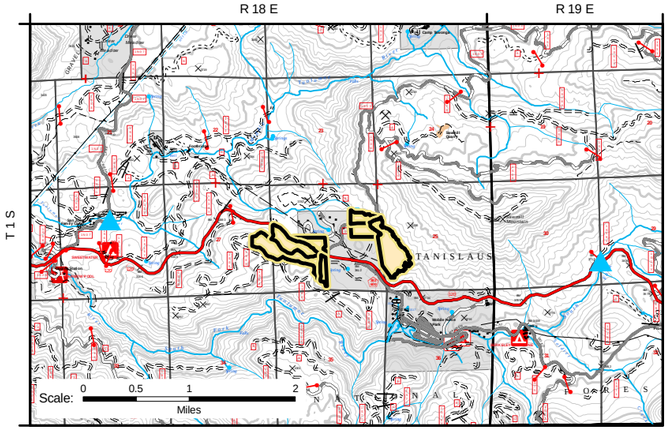

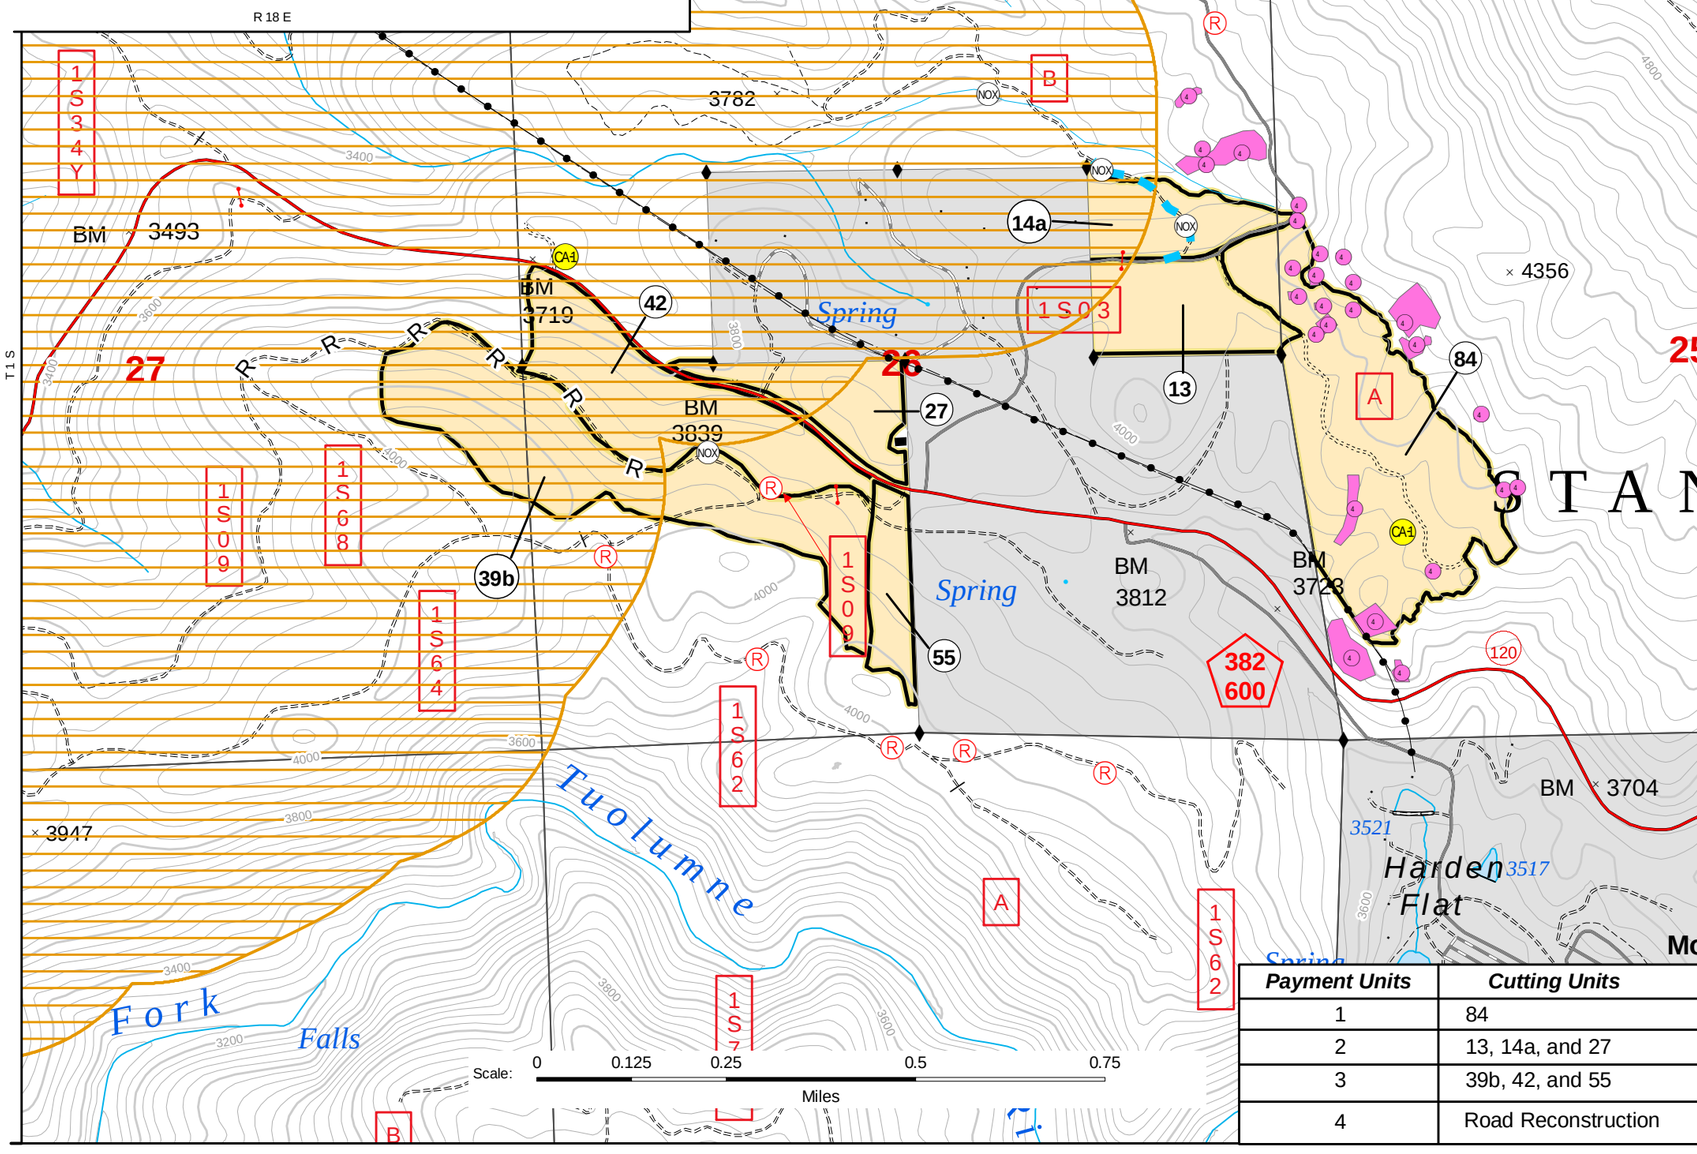

Legend

- Sale Unit Boundary/Payment Unit Boundary, Cutting Unit Boundary, BT1.1
- 84 — Individual Tree Mark Unit, BT2.35, CT2.21#, CT2.35#
- Existing Transportation System, BT1.1, BT5.12, BT6.22, CT5.31#, CT6.41#
- R R — Restricted Roads (1S09), BT5.12 and CT5.12#
- Specified Road Reconstruction (1S03B), AT7, BT5.2, BT6.22, CT5.31#, CT6.411#
- 120 1S09 — Road Number, BT1.1
- Water Supply Development, CT5.35#
- Protection of Improvements, Gate, BT6.22, CT6.41#
- Protection of Improvements, Overhead/Underground Utility, BT6.22, BT6.221, CT6.22#, CT6.41#
- Protection of Improvements, Other Ownership, BT6.22, BT6.221, CT6.41#
- Protection of Improvement, Survey Monument, BT6.23, CT6.41#
- 50' 15' — Streamcourse Protection, (Perrenial and Intermittent Streams), Skidding Equipment - 50 foot exclusion zone, Mechanized Harvesting Equipment - 15 foot exclusion zone, CT6.5
- CA1 — CA-1, Controlled Area, BT6.24, CT6.24#, CT6.41#
- CA-3, Controlled Area, No Operations Between March 1 and August 15, BT6.24, CT6.24#, CT6.315#
- 4 — CA-4, Controlled Area, No Operations Permitted, BT6.24, CT6.24#, CT6.41#
- NOX — Known Noxious Weed Location, BT6.35
- R — Protect Reserve Trees, CT2.3#, CT6.32#

Supplemental Information

ITM	Individual Tree Marked Included Timber, Entire Sale Area, BT2.35 and CT2.35#
DxSPP	Designation by Species and Diameter (Units 13, 14a, 27, 39b, 42 and 55), BT2.35, CT2.352#
DxDAM	Designation by Damage Class (Units 13, 14a, 27, 39b, 42 and 55), BT2.35, CT2.353#
KO	Keep Road Open (All Forest Service, State Highway and County Roads), BT6.22
Whole	Whole Tree yarding (All Cutting Units), CT6.41#
MH	Mechanized Harvesting, (All Cutting Units) BT6.42, CT6.42#
DF	Directional Felling (All Cutting Units), CT6.41#
MAX	Maximum Tractor Size, 136" Width (All Cutting Units) CT6.42#
TRAC	Ground-Based Skidding, (All Cutting Units), BT6.42, CT6.42#
SUSP	One End Suspension, (All Cutting Units), BT6.42, CT6.42#
SPACE	Skid Road Spacing, (All Cutting Units), BT6.42, CT6.42#
ENDL	Endling, (All Cutting Units), BT6.42, CT6.42#
TILL	Tillage of Landings, Temporary Roads and Main Skid Trails (7 Acres), CT6.6#
25' 15'	Streamcourse Protection, (Ephemeral Streams), Skidding Equipment - 25 foot exclusion zone, Mechanized Harvesting Equipment - 15 foot exclusion zone, CT6.5
1"	Minimum Stump Height (All Cutting Units), AT6, BT6.412, CT6.41#
4"	Maximum Stump Height within 50 to 200 foot slope distance of Highway 120, AT6, BT6.412
6"	Maximum Stump Height within 200 to 400 foot slope distance of Highway 120, AT6, BT6.412
FLUSH	Horizontal Flush Cut Stumps within 50 foot slope distance of Highway 120, AT6, BT6.412

Slash Treatment (Entire Sale Area), BT6.7, CT6.7#

VIEW/HAND	Hand Pile in View Area (not to exceed 100 feet) adjacent to Highway 120
PILE	Hand Pile in Disposal Strip along Permanent Roads and Other Ownership
MACH	Machine Pile (w/brush rake) all Landing Piles
SCAT 18"	Scatter outside MACH/PILE/VIEW Areas
FELL	Damaged Trees
COVER	Cover Piles
D	All Landings are Designated as Disposal Sites

Payment Units	Cutting Units
1	84
2	13, 14a, and 27
3	39b, 42, and 55
4	Road Reconstruction

Emergency Precautions (Mt. Elizabeth Weather Station), BT7.22, CT7.22#

Landlines & Symbol Locations Are Approximate

ceg 08/04/2010