


Hitchcock Branch Project 3

Project Item 3; Gate Placement:

The contractor shall provide all supplies, materials and equipment necessary to construct, install and sign gates as shown in the following drawings at locations, on the following roads, to be identified in the field by the Forest Service.



Forest Service Roads 1107, 1104, 1078, 1080, 1040A, 1040B, 1 040C, 1040D, 1001 and 1024A.

Hitchcock Branch Project 3

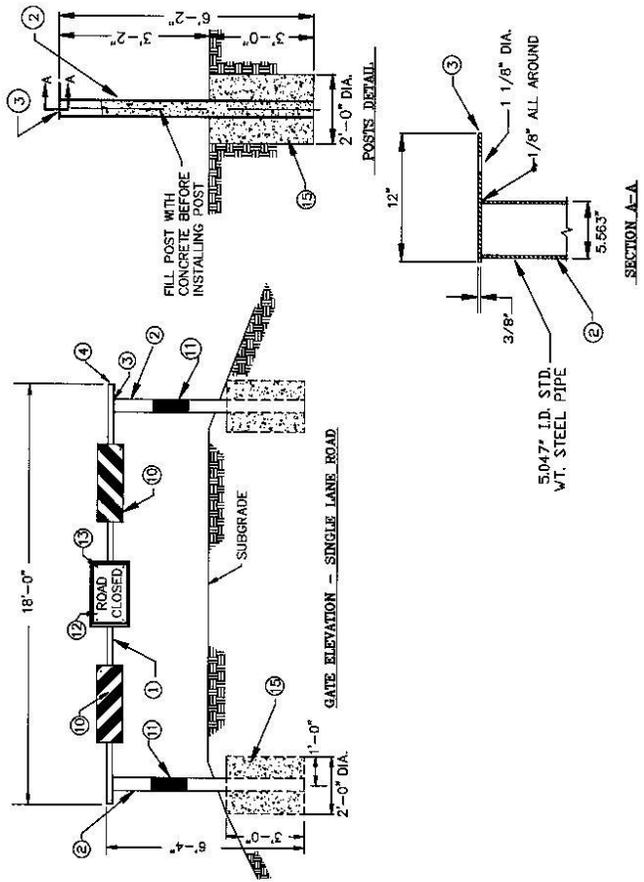

NOT TO SCALE

Hitchcock Branch Project 3

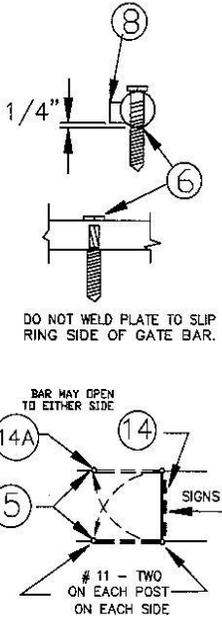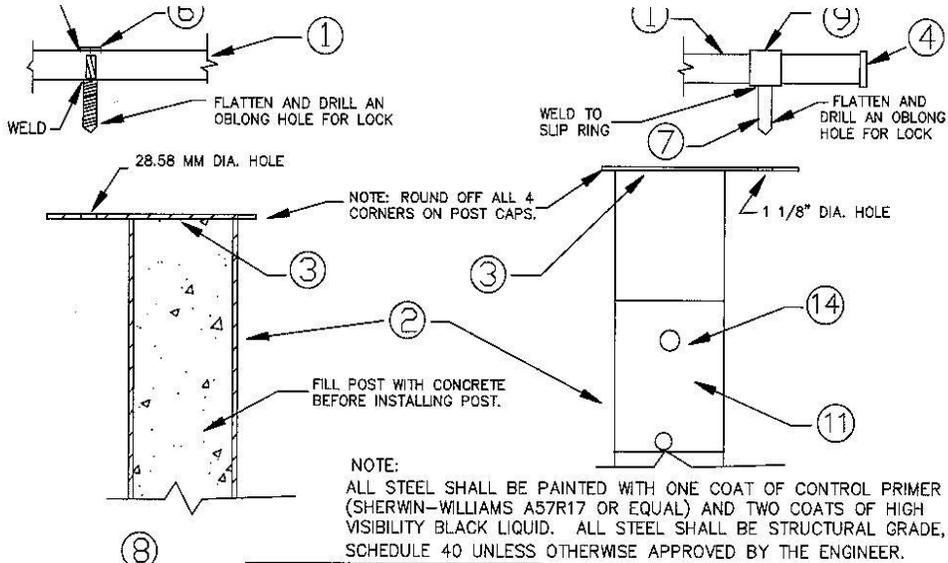

NO.	NAME	DESCRIPTION	QTY
1	GATE BAR	2" DIA. x 216" STEEL PIPE	1
2	GATE POST	5.047" DIA. x 60" STEEL PIPE	2
3	POST CAP	3/8" X 7 1/2" X 12" PLATE	2
4	GATE BAR CAP	3/8" X 2 1/2" DIA. PLATE	2
5	V NOTCHED TREATED POST, BURIED 0.61M	4" X 4" x VARIES	2
6	HEX BOLT	1" X 3 1/2"	1
7	STEEL PEN	1" DIA. X 1 1/2"	1
8	WELDED STEEL PLATE	1" X 1" X 1/4"	1
9	SLIP RING	2 1/8" I.D. X 3" PIPE	1
10	0.61 M X 20.32 C	BM-L-R	1
11	OBJECT MARKER	BM-R-R	1
	0.15 M X 0.31 M	OM-2-B	8
12	ROAD CLOSED SIGN,	FR11-2-24	1
	0.61 M X 0.31 M		
13	SIGN FASTENER, POP RIVETS OR BOLT DEFORM THREADS	3/16"	12
14	ROUND HEAD BOLTS W/NUTS AND WASHERS,	3/16" x 1"	8
14A	WOOD SCREWS	3/16" X 1"	8
@15	CONCRETE FOR POST	CUBIC YARD	.77

NOT TO SCALE @ DENOTES FILLET WELD, WELD ALL AROUND @ALL CONCRETE SHALL MEET REQUIREMENTS OF ITEM 601.

C:\Documents and Settings\mduffy\Documents\AutoCAD\Projects\gates\gates.dwg May 15, 2007 - 10:07am mduffy

GATE DETAILS 7	PROJECT: OCONEE ROADS	FOREST SERVICE CHATTAHOOCHEE NATIONAL FOREST FOREST SUPERVISOR: _____
	LOCATION: OCONEE NF	
	FOREST: CHATTAHOOCHEE-OCONEE NF	
	DATE: _____	