


FINAL

2008/2009 WORK PLAN

New World Mining District Response and Restoration Project

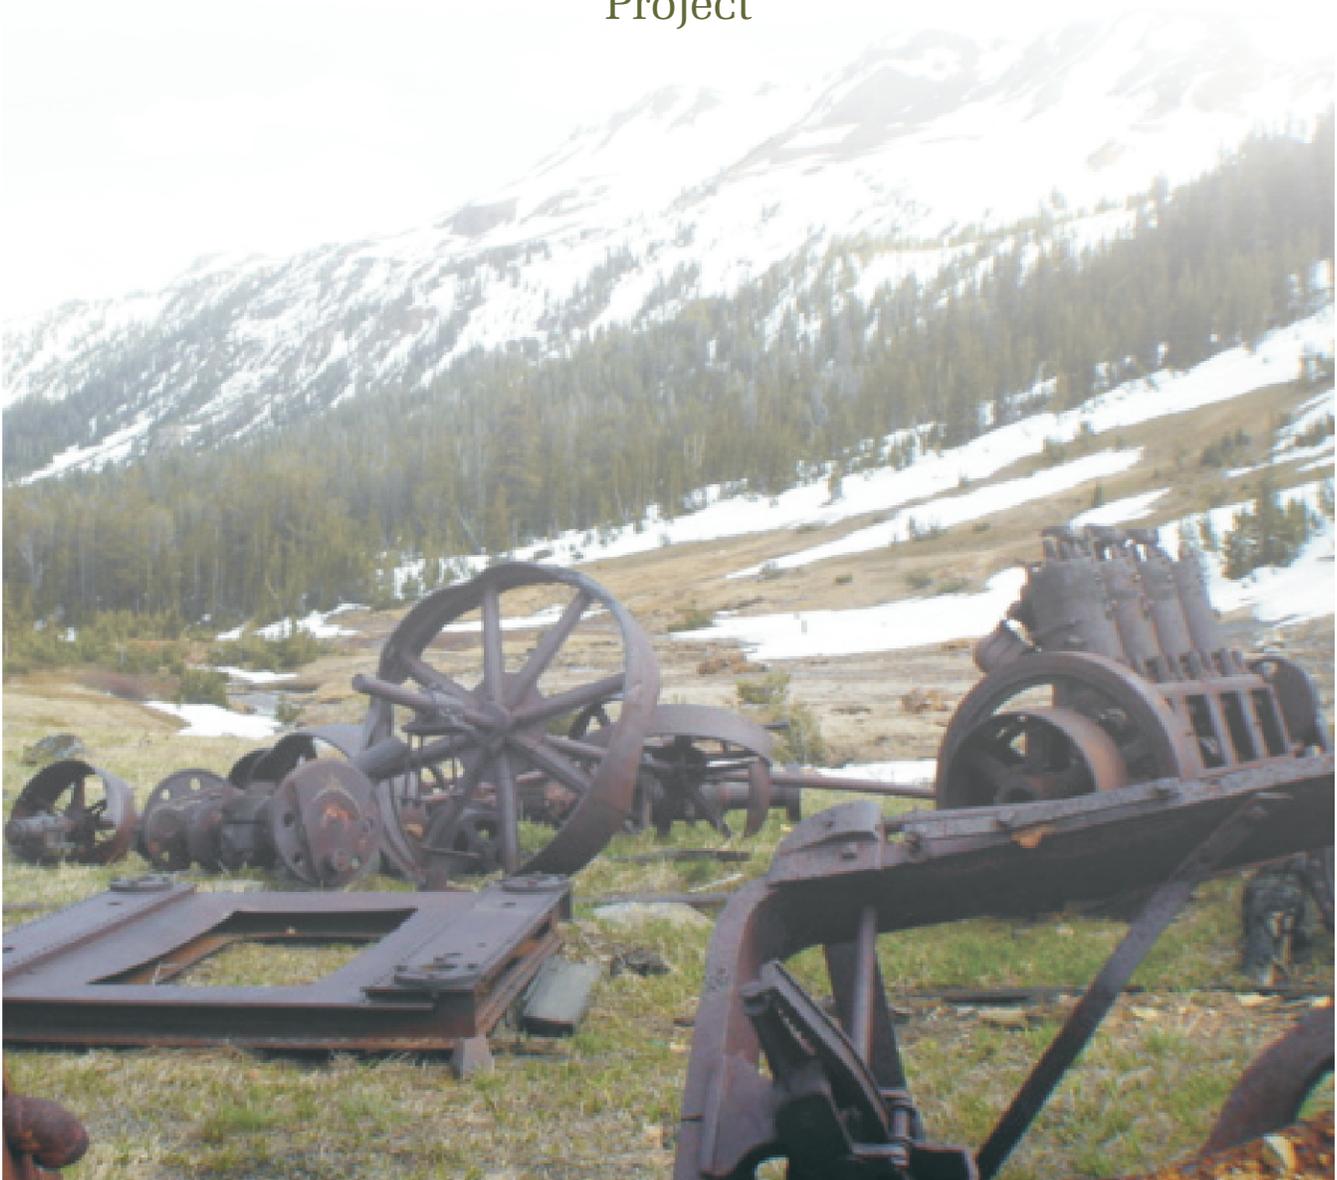

July 2008

United States Department of Agriculture
Forest Service
Gallatin National Forest



FINAL

**2008/2009 WORK PLAN
NEW WORLD MINING DISTRICT
RESPONSE AND RESTORATION PROJECT**

Prepared for:

**USDA Forest Service
Gallatin National Forest
Bozeman, Montana**

Prepared by:

Tetra Tech
851 Bridger Drive
Bozeman, Montana 59715

July 2008

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION	1
1.1 PROJECT BACKGROUND.....	1
1.2 SITE LOCATION AND DESCRIPTION.....	6
1.3 PURPOSE AND OBJECTIVES.....	7
2.0 SCOPE OF WORK	9
2.1 COMMUNITY RELATIONS.....	9
2.2 MAINTAIN PROJECT WEBSITE AND DATABASE.....	10
2.3 SURFACE WATER QUALITY MONITORING.....	10
2.4 GROUNDWATER MONITORING.....	18
2.5 GLENGARRY CHANNEL RECONSTRUCTION.....	25
2.6 TRAIL RECONSTRUCTION.....	26
2.7 WILLOW PLANTINGS.....	26
2.8 RECLAMATION MONITORING.....	26
2.9 ABANDON NEUTRON PROBE ACCESS TUBES.....	27
2.10 PREPARE 2009/2010 WORK PLAN.....	27
2.11 PREPARE 2008 PROJECT SUMMARY.....	27
3.0 PROJECT SCHEDULE	27
4.0 REPORTS	29
5.0 REFERENCES	31

LIST OF FIGURES

Figure

1	Project Vicinity Map.....	3
2	2008 Surface Water Monitoring Stations.....	13
3	2008 Adit Discharge Monitoring Stations.....	14
4	2008 Groundwater Monitoring Stations.....	23
5	McLaren Pit Area Monitoring Sites.....	24
6	Project Schedule.....	28

LIST OF TABLES

Table

1	Community Relations Activities.....	10
2	2008 Surface Water Sample Sites.....	12
3	Surface Water Field Parameters.....	15
4	Surface Water Sampling Requirements.....	15
5	Surface Water Analytical Requirements.....	16
6	Supplemental Surface Water Sample Site Monitoring Objectives.....	17
7	Adit Discharge Sample Sites.....	18
8	Fisher Creek and Repository Well Monitoring.....	19
9	McLaren Pit Area Monitoring Wells Scheduled for Sampling in 2008.....	20
10	Groundwater Field Parameters.....	21
11	Groundwater Sampling Requirements.....	21

TABLE OF CONTENTS (continued)

<u>Table</u>		<u>Page</u>
12	Groundwater Analytical Requirements.....	25
13	Reclamation Monitoring Sites.....	26
14	Project Document List	29

I.0 INTRODUCTION

This document provides descriptions of work tasks to be completed during 2008/2009 in conjunction with response and restoration activities for the New World Mining District Response and Restoration Project in Park County, Montana (**Figure 1**). The 2008/2009 Work Plan complements the Overall Project Work Plan (Maxim, 1999a) by providing a description of specific work elements that will be completed in 2008/2009. This work plan initiates the project cycle for the ninth year of the project. Project activities conducted by the U.S. Department of Agriculture (USDA) Forest Service began in 1999. Those activities are described in the 1999, 2000, 2001, 2002/2003, 2003/2004, 2004/2005, 2005/2006, 2006/2007, 2007/2008 Work Plans (Maxim, 1999b; 2000; 2001a; 2002a; 2003a; 2004a; 2005a; 2006a; and Tetra Tech 2007).

This year's work plan for the project crosses over into 2009 and is designated the 2008/2009 Work Plan. This period of time is covered in this document because it is more useful for the planning period to begin in the spring to accommodate field and construction activities that must be completed during a relatively short season beginning in April and ending in early October.

A general description of the site, project objectives, and project organization are provided in this introductory section. Following this introductory section is a detailed description of the work tasks that will be completed during 2008/2009, a project schedule, and project deliverables. For more detailed descriptions of the overall project, the reader can refer to the Overall Project Work Plan (Maxim, 1999a) and/or annual project summary documents produced in 2001 through 2006 (Maxim, 2001b; 2002b; 2003b, 2004b; 2005b; 2006b). These documents are available on the project website at,

<http://www.fs.fed.us/r1/gallatin>

and at two project information repositories located at the Gallatin National Forest Supervisor's Office in Bozeman, Montana and at the Cooke City Chamber of Commerce office in Cooke City, Montana. The reader is encouraged to review these documents to gain a better understanding of the overall project.

I.1 PROJECT BACKGROUND

On August 12, 1996, the United States signed a Settlement Agreement (Agreement) with Crown Butte Mines, Inc. (CBMI) to purchase CBMI's interest in their New World Mining District (District) holdings. This transfer of property to the U.S. government effectively ended CBMI's proposed mine development plans and provided \$22.5 million to cleanup historic mining impacts in the District. In June 1998, all interested parties and CBMI signed a Consent Decree (Decree). The Decree, approved by the United States District Court, finalized the terms of the Agreement and made available the funds that are being used for mine cleanup. Monies available for cleanup will be spent first on District Property, which, as defined in the Decree, includes all property or interests in property that CBMI relinquished to the United States (**Figure 1**). As funds are available after District Property is cleaned up to the satisfaction of the United States, other mining disturbances in the District may be addressed.

The USDA Forest Service, as the lead agency responsible for implementing the cleanup, has assembled a management team and has published objectives to guide reclamation and restoration of the historic mining impacts in the District. Under their Superfund authority, the USDA Forest Service will execute the response and restoration project by following guidance provided by the Environmental Protection Agency (EPA) for non-time-critical removal actions (EPA, 1993). Non-time-critical removal actions are defined by the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) and the National Oil and Hazardous Substances Pollution Contingency Plan (NCP) as actions that are

implemented by the lead agency to respond to “the cleanup or removal of released hazardous substances from the environment ... as may be necessary to prevent, minimize, or mitigate damage to the public health or welfare or to the environment...” (EPA, 1993).



In 1995, EPA began a site investigation after initial announcement of the property transfer from CBMI. The EPA investigation involved installation of monitoring wells, surface water sampling, groundwater monitoring, and completion of a groundwater tracer study. In October 1998, the USDA Forest Service assisted CBMI in completing and submitting a Support Document and Implementation Plan to support the CBMI petition for temporary modification of water quality standards. Under the Decree and Agreement, CBMI is required to submit petitions regarding temporary standards if requested by the USDA Forest Service. The Support Document and Implementation Plan (Stanley and Maxim, 1998) was submitted to the State of Montana Board of Environmental Review (Board) on January 22, 1999. The petition for the adoption of temporary standards for Fisher Creek, Daisy Creek, and a portion of the upper Stillwater River was accepted by the Board and noticed for public hearing. The proposed rule was modified to reflect public comment and the temporary water quality standards were approved and adopted by the Board on June 4, 1999. The goal of the temporary standards is to allow the project to proceed so that water quality in Fisher Creek, Daisy Creek, and the Stillwater River improves to the point where these streams meet uses for waters classified B-I under classification standards established by the State of Montana.

The temporary standards are subject to change as improvements in water quality are realized. They are reviewed every three years to determine if changes are desirable, and the first review was required in 2002. The Board held a hearing on July 26, 2002, to review the long-term water quality data collected since the standards became effective in June 1999, and compared project progress with that presented in the implementation plan (Maxim, 2002c). As a result of this review, the Board took no action to modify the temporary standards as originally defined in June 1999. A second tri-annual review hearing on temporary water quality standards was held by the Board on June 3, 2005, with the same result.

In March 1999, the USDA Forest Service initiated the planning process for the project. Planning documents were in place in June 1999, and work began on the project with the monitoring of surface water and groundwater quality at selected monitoring points. Activities that have been conducted to date include the following:

- Establishing a database management system for the project.
- Cataloging existing information available for the site.
- Conducting public meetings and annual technical meetings to distribute relevant project information to interested parties.
- Completing a technical evaluation of existing information and data.
- Developing a suitable base map to support engineering design.
- Conducting annual surface water and groundwater monitoring at select locations in the District.
- Obtaining data to fill identified data gaps for proposed response actions including installing monitoring wells, collecting environmental samples, and collecting other environmental data.
- Identifying unrecorded mine waste dumps, adits, and boreholes, and developing a database of site characteristics.

Data Source: Ownership, unimproved roads, and mine waste source areas from Gallatin National Forest Interagency Spatial Analysis Center, (Fall 2002 and Winter 2003).
 Cartographic feature files obtained from Montana State Library, Natural Resource Information System.

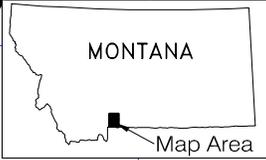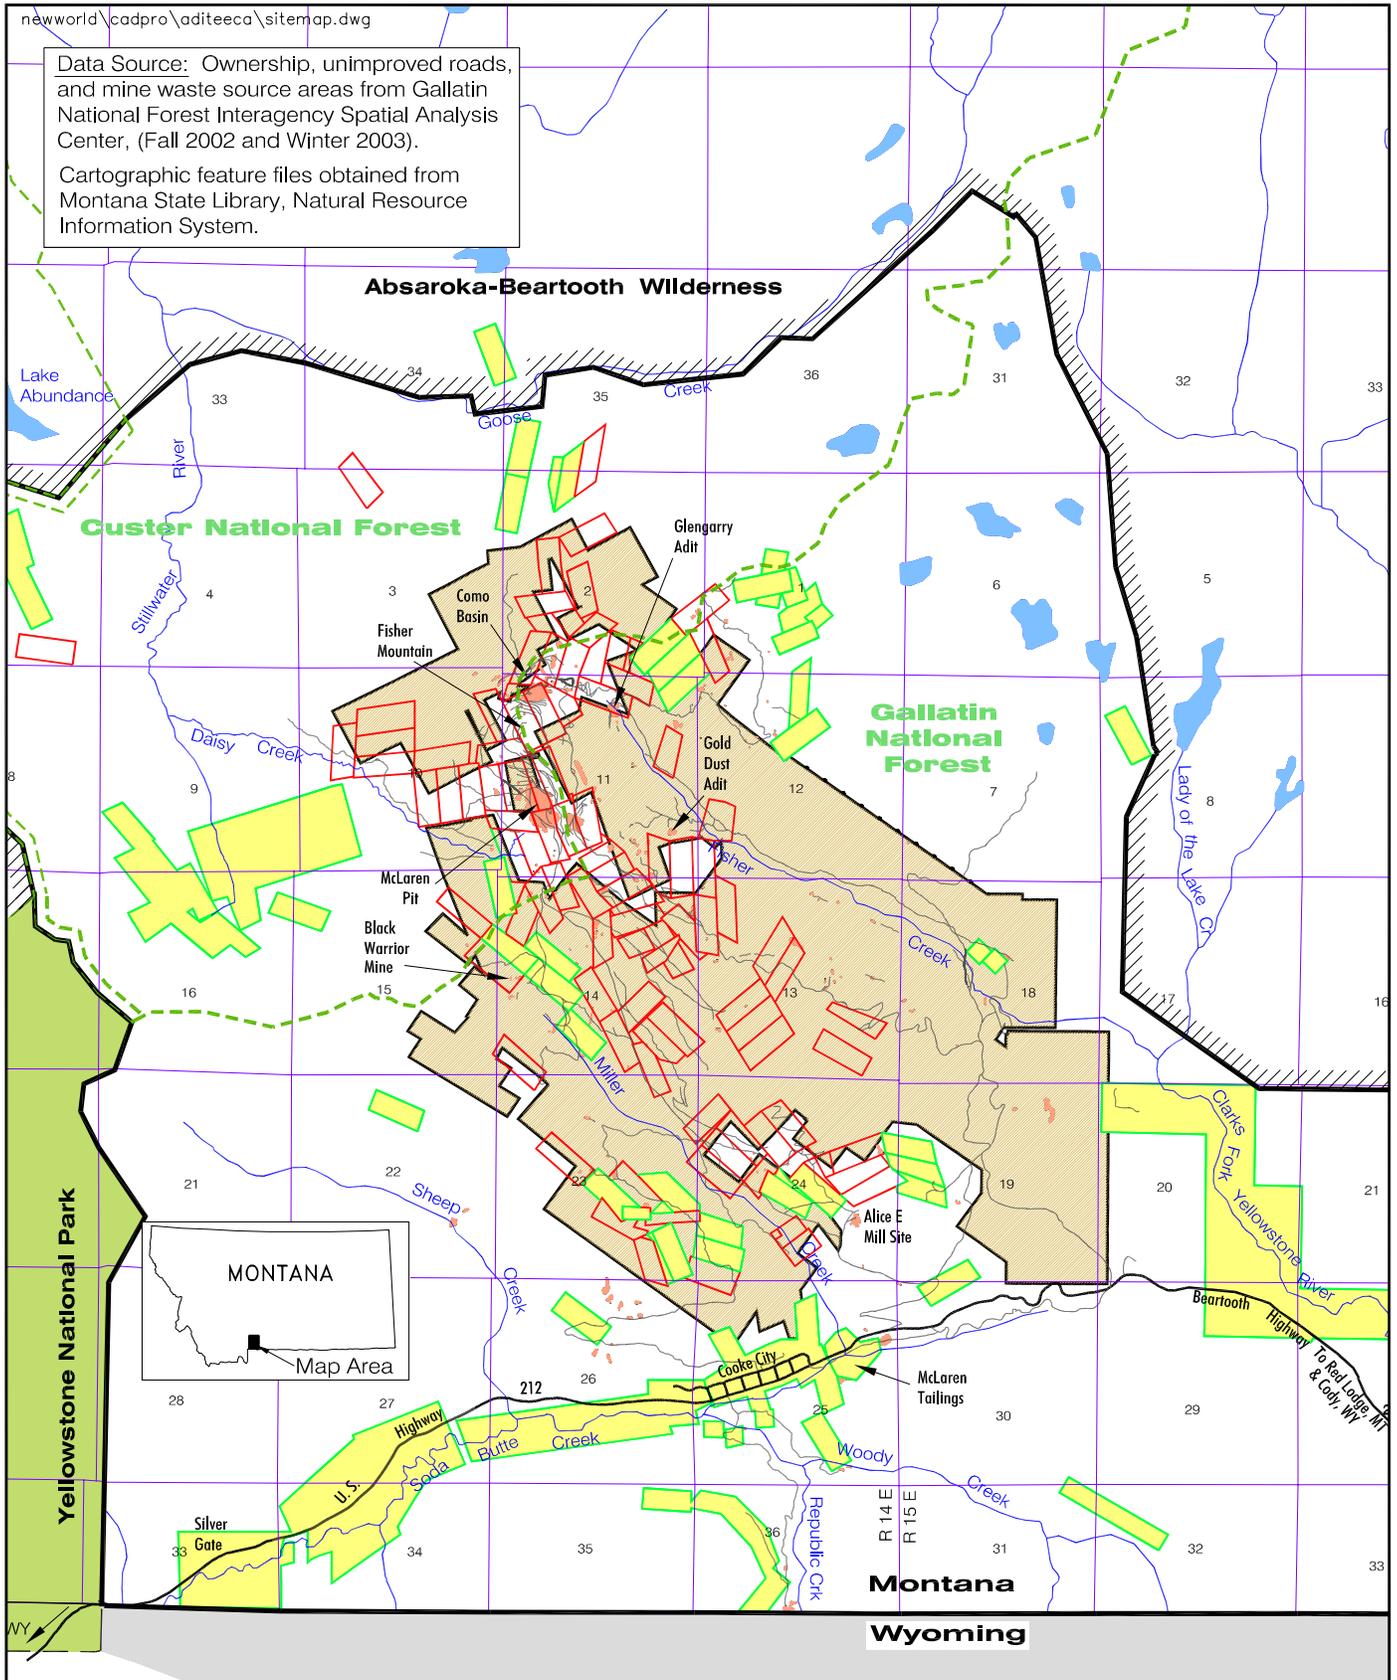

0 Feet 5000



- District Property Boundary
- District Boundary
- ~ Unimproved Road
- - - National Forest Boundary
- /// Wilderness Boundary
- Mine Waste Source Area
- District Property (Patented Claims)
- District Property (Unpatented Claims)
- Private Property



6561306.110

Project Vicinity Map
 New World Mining District
 Response and Restoration Project
 Cooke City Area, Montana

FIGURE 1

Figure I - back page

- Improving portions of the Daisy Pass and Lulu Pass roads to accommodate construction traffic.
- Improving a previously constructed surface water diversion around the Como Shaft.
- Completing a repository siting evaluation report and collecting hydrogeologic data on two prospective repository sites.
- Completing a surface water tracer study by the U.S. Geological Survey on Daisy Creek and Miller Creek to determine surface water inputs of metal contaminants.
- Ranking mine waste sources according to a modified Hazard Ranking System to aid in the prioritization of sites slated for clean up.
- Identifying unrecorded cultural features.
- Reopening the Glengarry Adit and Como Raise to more fully characterize underground sources of water within the mine.
- Evaluating water quality treatment alternatives for acid mine discharges.
- Preparing a Selective Source Response Action Engineering Evaluation/Cost Analysis (EE/CA) for potential response alternatives (Maxim, 2001c).
- Removing approximately 25,000 cubic meters (32,700 cubic yards) of mine waste rock and mill tailings (nine percent of the total District waste) from seven mine waste areas, disposing of these wastes in an engineered repository, and revegetating about 1.9 hectares (4.6 acres) of the former waste areas for the Selective Source Response Action.
- Preparing a McLaren Pit Response Action EE/CA (Maxim, 2001d).
- Consolidating and capping waste rock dumps from the Daisy Creek headwaters into the McLaren Pit. These waste source areas account for about 67% of the District's total waste rock volume on District Property. Construction activities were initiated in 2002 with the consolidation of the wastes, and concluded with capping the consolidated wastes with an impermeable cover in 2003.
- Preparing a report for the Board of Environmental Review with respect to their review of the temporary water quality standards.
- Preparing a Como Basin/Glengarry Adit/Fisher Creek Response Action EE/CA (Maxim, 2002d).
- Closing the Glengarry Adit to eliminate contaminated outflows.
- Reopening and evaluating the McLaren Adit, and grouting an exploration boring that intersected the adit tunnel.
- Preparing the Miller Creek Response Action EE/CA (Maxim, 2004c).
- Monitoring reclaimed and revegetated sites in the District.
- Completing construction of surface controls at select sites in the Miller Creek and Fisher Creek drainages.
- Consolidating and capping mineralized disturbed soils in the Como Basin.
- Removing approximately 23,000 cubic meters (30,000 cubic yards) of mine waste rock from four waste rock dumps located in the Fisher and Miller Creek drainages and disposing of these wastes in the New World Waste Repository.
- Characterizing the distribution of sediment in Fisher Creek and Daisy Creek.

- Preparing an Adit Discharge EE/CA to evaluate alternatives that could reduce the flow or improve water quality discharging from historic adits in the District.
- Plugging and abandoning 53 former monitoring wells.
- Studying ferricrete deposition in Fisher Creek and Daisy Creek.
- Studying the effects of reclamation work on grizzly bear activity in the District.
- Studying the occurrence of metal contaminated sediment in the Stillwater wetland.
- Preparing documentation to list the District on the National Register of Historic Places.
- Preparing Project Summary documents to succinctly describe project activities over the years.
- Completing white bark and lodgepole pine tree planting at reclaimed site.
- Closure and reclamation of select road segments.

1.2 SITE LOCATION AND DESCRIPTION

The District falls within the Gallatin and Custer National Forests and abuts Yellowstone National Park's northeast corner. The Absaroka-Beartooth Wilderness Area bounds the District to the north and east, with the Montana-Wyoming state line forming the southern boundary of the District. The District lies entirely within Park County, Montana (**Figure I**).

The communities of Cooke City and Silver Gate, Montana, are the only population centers near the District. The neighboring communities of Mammoth, Wyoming, and Gardiner, Montana, are located about 80 kilometers (50 miles) to the west. Red Lodge, Montana, is located about 105 kilometers (65 miles) to the northeast via the Beartooth Highway, and Cody, Wyoming, is located 95 kilometers (60 miles) to the southeast.

The District is located at an elevation that ranges from 2,400 meters (7,900 feet) to over 3,170 meters (10,400 feet) above sea level. The site is snow-covered for much of the year and only one route of travel is open on a year-round basis -- the highway between Mammoth and Cooke City. The Sunlight Basin road accesses the District from northwestern Wyoming during the spring, summer, and fall but only allows access to within a few miles of the District in winter. The Beartooth Highway allows access to the District from the east but is closed during winter.

The District covers an area of about 10,360 hectares (25,600 acres). Historic mining disturbances affect about 20 hectares (50 acres) located on District Property. Mining disturbances on non-District Property include the McLaren Tailings and McLaren Millsite, which cover an additional 6.9 hectares (17 acres).

The topography of the District is mountainous with dominant glacial features, and is situated at the headwaters of three river systems that all flow into the Yellowstone River. The three tributaries are the Clarks Fork of the Yellowstone, the Stillwater, and the Lamar. The Lamar River flows through Yellowstone Park. The major tributary streams in the District include Daisy, Miller, Fisher, Goose, Sheep, Lady of the Lake, Republic, Woody, and Soda Butte creeks.

I.3 PURPOSE AND OBJECTIVES

The primary purpose of this work plan is to guide project activities that will be conducted in the 2008/2009 planning year. Objectives for the 2008/2009 Work Plan are consistent with those detailed in the Overall Project Work Plan (Maxim, 1999a) and those described in the Revised Support Document and Implementation Plan for Temporary Water Quality Standards (Maxim, 2003c). Primary objectives for work done in 2008/2009 include: conducting response actions; collecting sufficient information to support engineering analyses and designs for response actions; monitoring water quality and revegetation success to document the results of response and restoration actions; and, satisfying the requirements of the rule allowing adoption of temporary water quality standards.

This page intentionally left blank.

2.0 SCOPE OF WORK

To meet the objectives for 2008/2009, the following activities will be performed:

- Maintain community relations in accordance with the Community Relations Plan (Maxim, 1999c).
- Maintain the project database and project website.
- Continue monitoring surface water and groundwater in the District including closely monitoring surface water and groundwater conditions downstream of the closed Glengarry Adit and downstream and within the capped McLaren Pit.
- Continue to monitor the New World Waste Repository and associated surface water and groundwater locations.
- Reconstruction of the Glengarry Bypass Channel.
- Reconstruct the Daisy Pass trail in accordance with the preferred alternative selected in the Como Basin/Glengarry Adit/Fisher Creek EE/CA.
- Willows will be planted at the Glengarry and Black Warrior Mine sites.
- Monitor reclamation at the New World Waste Repository, Como Basin, Little Daisy Adit, Black Warrior waste dump, Glengarry waste dump, and the Gold Dust Adit.
- Abandonment of nine neutron probe access tubes in the McLaren Pit.
- Prepare the 2009/2010 Work Plan
- Prepare the 2008 Project Summary

Final road maintenance, including road surfaces, culvert, and cut-and-fill slopes, will not be conducted this year. This work will be undertaken once all other site construction work is completed.

A more complete description of each of these activities is presented below.

2.1 COMMUNITY RELATIONS

A Community Relations Plan was developed for the project and is included in the Overall Project Work Plan (Maxim, 1999c). This plan describes community relation strategies that will be used to share information with the public and obtain timely input on proposed project activities. Community relation techniques include preparing news releases, preparing project summaries, conducting technical workshops and public meetings, making project documents readily available to interested parties, and accepting and responding to public comment on project activities.

Community relation activities described in the plan will be used in 2008/2009 to keep the public informed of project activities. Events expected for 2008/2009 with the anticipated timing of the events are listed in **Table I**. As other events arise during the year, the public will be informed in a timely manner in accordance with the Community Relations Plan.

TABLE I COMMUNITY RELATION ACTIVITIES 2008/2009 Work Plan	
Event/Task	Timing
Public Meeting	August/September 2008 - Cooke City
Technical Meeting Presenting 2008 Monitoring Results	January 2009 – Bozeman

2.2 MAINTAIN PROJECT WEBSITE AND DATABASE

The USDA Forest Service has maintained a project website since project inception. The website address is:

<http://www.fs.fed.us/r1/gallatin>

The project website contains general information on the project as well as a library of archived information specific to the work that has been conducted over the past eight years. The library contains downloadable versions of all documents that have been made available to the public in addition to a list of historic documents produced by various authors during the 1990's. Project information stored at the New World Response and Restoration Project document repository in Bozeman is also listed on the website. Environmental data that have been collected at the New World site are cataloged in a Microsoft Access® database, and analytical data for surface water and mine waste samples are available for downloading from this database.

The project website will be maintained to disseminate information, reports, and data related to the project. Relevant reports prepared during 2008/2009 will be posted to the website after hard copy documents are made available to the public. Other reports, such as technical memoranda, will also be available on the project website. The project water quality database will continue to be updated as new project information is collected during 2008/2009.

2.3 SURFACE WATER QUALITY MONITORING

This section of the work plan describes long-term and supplemental surface water monitoring activities that will be completed in 2008. In addition, surface water samples will be collected from selected adit discharges and stations below the New World Waste Repository.

2.3.1 Long-Term Surface Water Quality Monitoring

Surface water quality monitoring will be conducted in 2008 at the 12 sampling stations identified in the Long-Term Surface Water Quality Monitoring Plan (Maxim, 1999d). Long-term surface water sampling sites are shown on **Figure 2** and listed in **Table 2**. Samples will be collected before the onset of snowmelt (April), during higher flow conditions (June), and during low flow conditions in the fall (September/October).

Surface water samples will be collected and analyzed in accordance with procedures and methods described in the Site-Wide Sampling and Analysis Plan (SAP) (Maxim, 1999f). In addition to the analytical methods described in the Site-Wide SAP, analysis of dissolved metals will be added to the parameter list for selected sites. Analysis of dissolved metals will allow further evaluation of reclamation success,

particularly in the McLaren Pit area, as dissolved metals analysis removes the contribution of metals present in suspended sediment. Sites selected for dissolved metals analysis are identified in **Table 2**.

Table 3 lists surface water field parameters and standard operating procedures (SOPs) from the Site-Wide SAP. **Table 4** lists preservation and bottle requirements and **Table 5** lists surface water analytical requirements and practical quantitation limits (PQLs).

2.3.2 Supplemental Water Quality Monitoring

Supplemental surface water stations will be monitored in Daisy Creek, Fisher Creek, and Miller Creek (**Table 2**). The monitoring objectives for each of the supplemental stations are listed in **Table 6**.

Samples will be collected from all supplemental surface water stations in conjunction with other long-term monitoring events (**Table 2**). Supplemental stations will be sampled and analyzed in accordance with procedures and methods described in the Site-Wide SAP (Maxim, 1999f). **Tables 3, 4, and 5** list field parameters, sampling requirements, and analytical requirements.

2.3.3 Adit Discharge Monitoring

There are 27 adit openings that have been inventoried in the District that discharge water of various quality into the Daisy, Miller, Fisher, and Soda Butte watersheds. Water quality characteristics of these discharges were summarized in the Draft Adit Discharge EE/CA (Tetra Tech, 2006). Of the 27 sites with discharges, only eight are perennial discharges with water quality that exceeds Montana water quality standards or guidelines (**Table 7**).

In accordance with the preferred alternative selected in the Draft EE/CA, adit discharges with water quality exceedances occurring on District Property will be monitored in 2008 (**Figure 3**). Adit discharge sites will be sampled and analyzed in accordance with procedures and methods described in the Site-Wide SAP (Maxim, 1999f). **Tables 3, 4, and 5** list field parameters, sampling requirements, and analytical requirements. Both dissolved and total recoverable metals will be analyzed.

2.3.4 New World Repository Monitoring



Surface water monitoring will be conducted at the New World waste repository in accordance with the methods and procedures described in the New World Waste Repository Long-Term Monitoring Plan (Maxim, January 2006). Surface water monitoring includes monitoring water quality in surface water tributaries SBT-3 and SBT-6 downstream of the repository. Monitoring will be conducted in April prior to snowmelt, during high flow conditions in May, and during low flow conditions in the fall. Samples will be collected for both dissolved and total recoverable metals analysis as well as field parameters, physical parameters, and common ions.

TABLE 2 2008 SURFACE WATER SAMPLE SITES 2008/2009 Work Plan					
Site Name	Location	April	May	June	Sept/ Oct
Daisy Creek Drainage					
DCT-7*	Daisy Cr. tributary south of McLaren Pit	--	--	X	X
DCT-8*	Daisy Cr. tributary south of McLaren Pit	--	--	X	X
DCT-9*	Daisy Cr. tributary south of McLaren Pit	--	--	X	X
USGS-1700*	Daisy Cr. tributary south of McLaren Pit	--	--	X	X
Cover Drains*	McLaren Pit drains beneath cover (DCSW-101, -102, -103)	--	--	X	X
DC-2	Daisy Creek below confluence of McLaren tributaries	X	--	X	X
DC-5*	Daisy Creek above confluence with Stillwater River	X	--	X	X
USGS-11890*	Stillwater River below the mouth of Daisy Creek	--	--	--	X
SW-7*	Stillwater River at Stillwater Trail Crossing	X	--	X	X
Fisher Creek Drainage					
FCT-12*	Tributary south of former Glengarry Adit	--	--	X	X
FCT-11*	Tributary below Como Basin	--	--	X	X
SW-3	Fisher Creek below former Glengarry Adit	X	--	X	X
FC-4*	Fisher Creek just above the Gold Dust Adit tributary (USGS synoptic station 1,704 meters)	--	--	--	X
SW-4*	Fisher Creek at Lulu Pass Road Crossing	X	--	X	X
CFY-2*	Fisher Creek above Clarks Fork confluence	X	--	X	X
Clarks Fork River Drainage					
SW-6*	Clarks Fork Yellowstone River at Saw Mill Road	X	--	X	X
Miller Creek Drainage					
SW-2*	Miller Creek below Miller Mountain Road Crossing	X	--	X	X
SW-5*	Miller Creek near mouth	X	--	X	X
Soda Butte Creek Drainage					
SBT-3*	Soda Butte Creek Tributary below Repository Site	X	X	--	X
SBT-6*	Soda Butte Creek Tributary below Repository Site	X	X	--	X
SBC-1	Soda Butte Creek above confluence with Miller Creek	X	--	X	X
SBC-2	Soda Butte Creek below McLaren Tailings	X	--	X	X
RR-SBSW-102	Soda Butte Creek below Woody Creek	X	--	X	X
SBC-4	Soda Butte Creek at Park Boundary	X	--	X	X

Note: * Indicates sample will be analyzed for both total and dissolved metals.

Data Source: Unimproved roads and surface water sample locations from Gallatin National Forest Interagency Spatial Analysis Center.
 Cartographic feature files obtained from Montana State Library, Natural Resource Information System.


G:\NEWORLD\cadpro\workplan\2008\2008swsmp2.dwg SAVED:12/13/07 PRINTED:12/13/07 BY:MARY.BELL

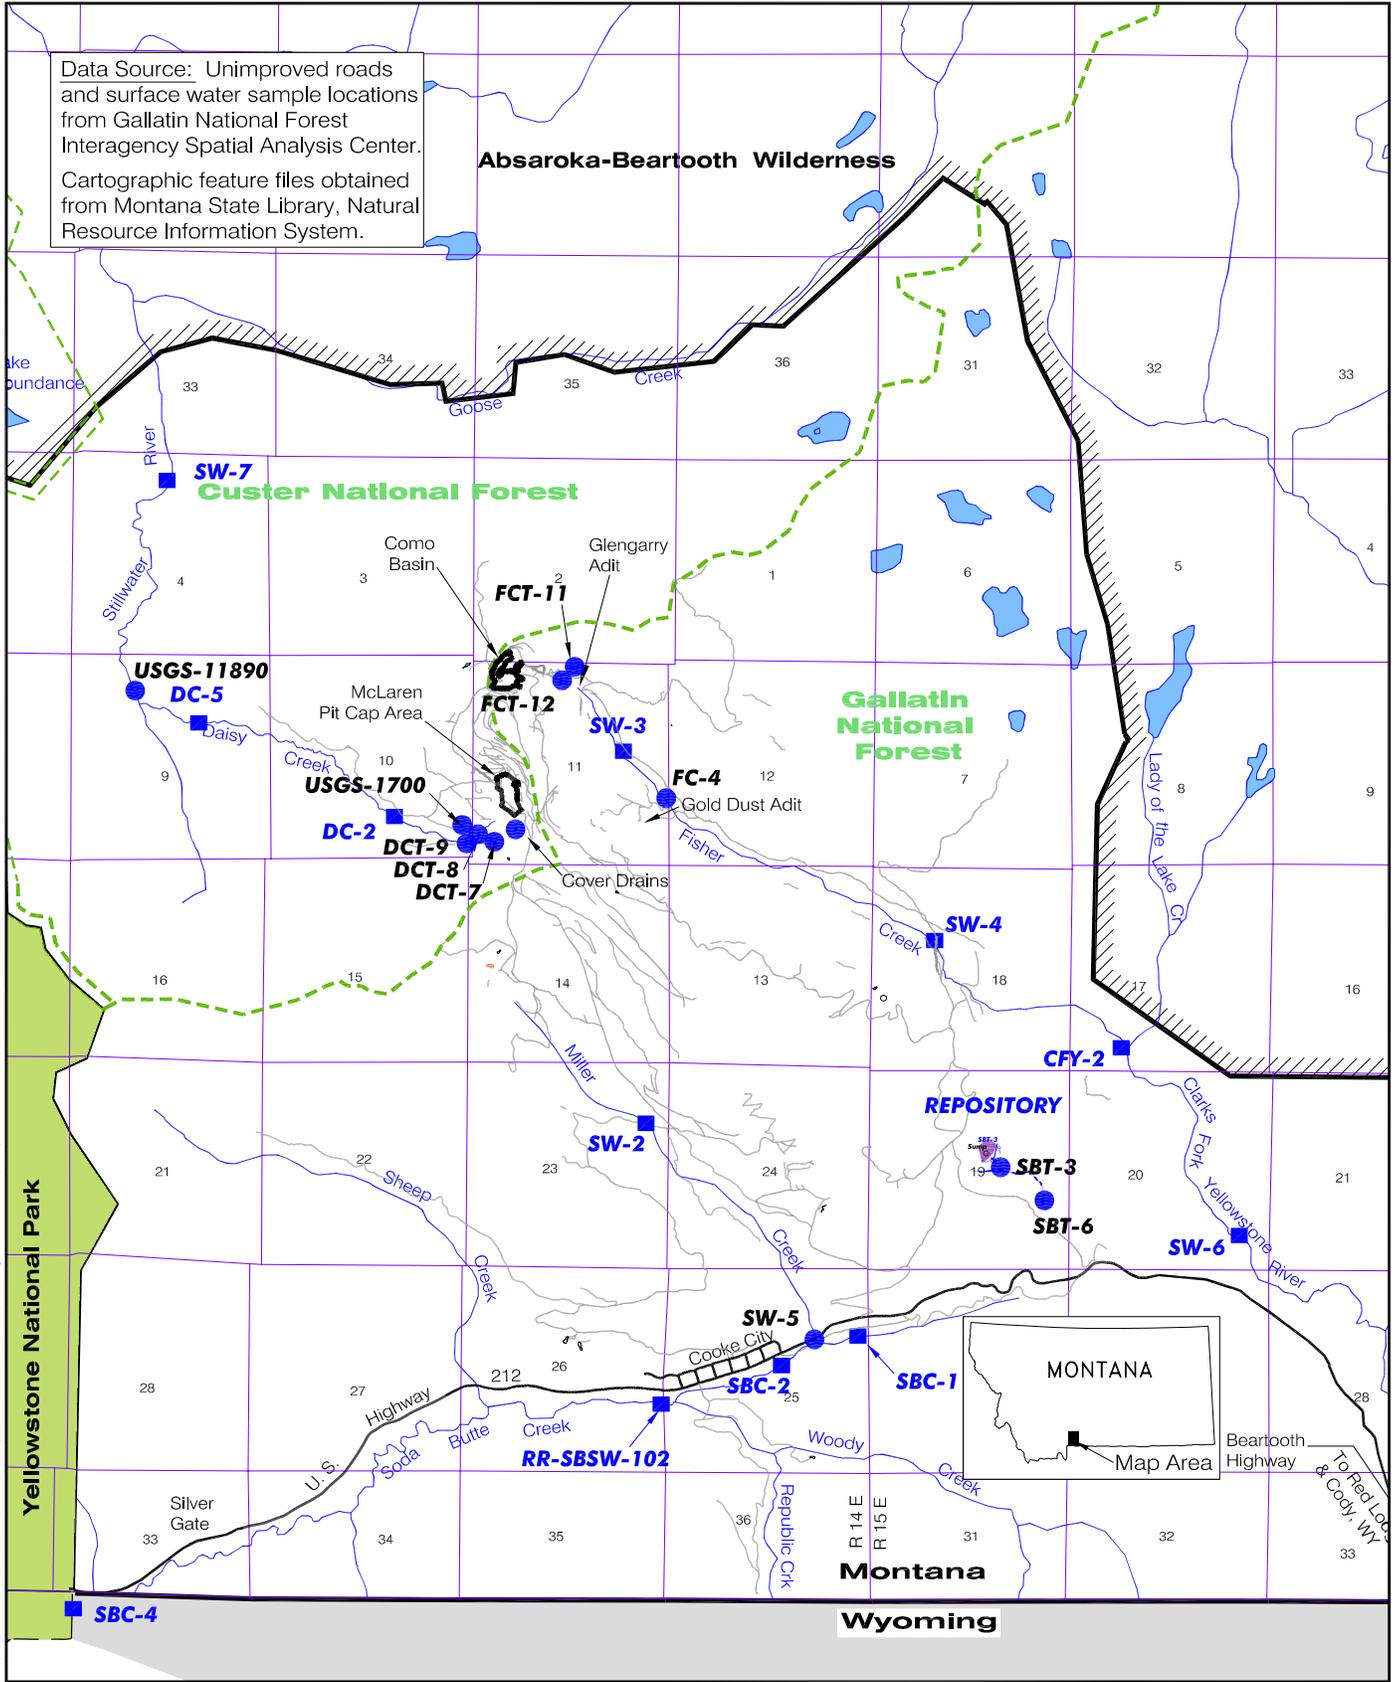

- District Boundary
- Unimproved Road
- National Forest Boundary
- Wilderness Boundary
- Long-Term Monitoring Station
- Supplemental Monitoring Station


2008 Surface Water Monitoring Stations
 New World Mining District
 Response and Restoration Project
 Cooke City Area, Montana

FIGURE 2

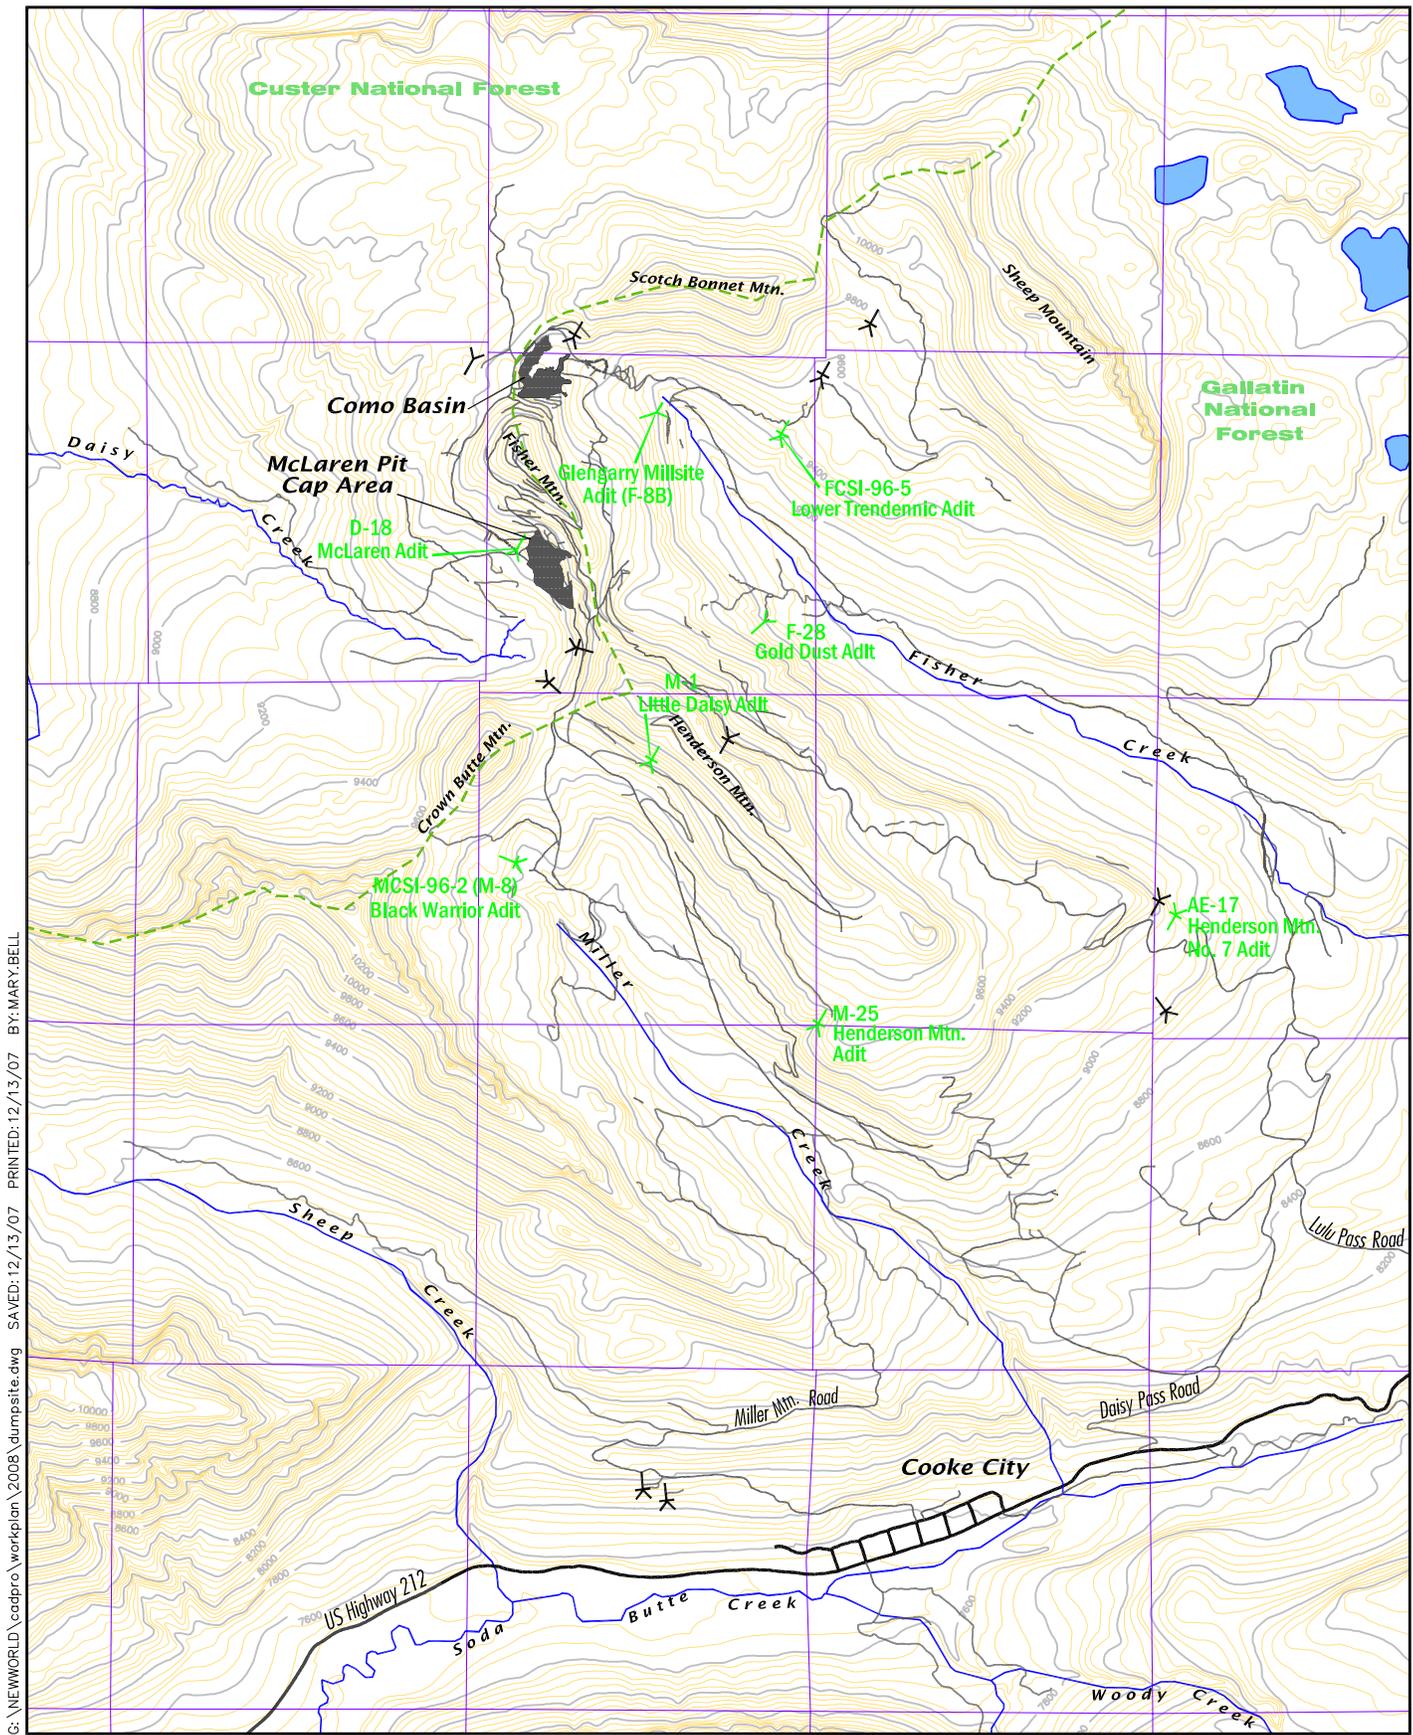

G:\NEWORLD\cadpro\workplan\2008\dumpsite.dwg SAVED:12/13/07 PRINTED:12/13/07 BY: MARY.BELL

Source: Topographic data from USGS 7.5 Cooke City Quad
Contour Interval = 40'



- Forest Boundary
- Roads
- Y Adit Sample Site
- Y Other Adit Discharge Site

2008 Adit Discharge Sample Sites
New World Mining District
Response and Restoration Project
Cooke City Area, Montana
FIGURE 3

**TABLE 3
SURFACE WATER FIELD PARAMETERS
2008/2009 Work Plan**

Parameter	SOP Number⁽¹⁾	SOP Title	Event
Specific Conductance	SOP-05	Field Measurement of Specific Conductance	All
pH	SOP-06	Field Measurement of pH	All
Water Temperature	SOP-07	Field Measurement of Water Temperature	All
Flow	SOP-01	Streamflow Measurement; Wading Technique	All

- 1 Maxim Standard Operating Procedures (Appendix A, Site-Wide SAP)
- 2 Field analysis will be conducted using a Hach DR 2000 Spectrophotometer following the procedures in Hach Water Analysis Handbook (1991)

**TABLE 4
SURFACE WATER SAMPLING REQUIREMENTS
2008/2009 Work Plan**

Parameter	Preservation⁽¹⁾	Bottle Size/Type
Total Recoverable Metals	HNO ₃ to pH < 2; Iced to 4°C	250 milliliter polyethylene
Dissolved Metals	Filtered through 0.45 micron filter; HNO ₃ to pH < 2; Iced to 4°C	250 milliliter polyethylene
Common Ions/Physicochemical	Iced to 4°C	500 milliliter polyethylene

- 1 HNO₃ = nitric acid

**TABLE 5
SURFACE WATER ANALYTICAL REQUIREMENTS
2008/2009 Work Plan**

Parameter	PQL (mg/L)⁽¹⁾	EPA Method No.	Max. Holding Time
Physicochemical			
Specific Conductivity	None	2310B	28 days
pH	None	150.1	Upon arrival at lab
Total Dissolved Solids	None	2340C	7 days
Total Suspended Solids	None	160.2	7 days
Hardness	None	2340B	6 months
Acidity	None	305.1	14 days
Metals⁽²⁾			
Aluminum	0.05	200.8/200.7	6 months
Cadmium	0.0001	200.8/200.7	6 months
Copper	0.001	200.8/200.7	6 months
Iron	0.01	200.8/200.7	6 months
Lead	0.001	200.8/200.7	6 months
Manganese	0.003	200.8/200.7	6 months
Zinc	0.01	200.8/200.7	6 months
Common Cations⁽²⁾			
Calcium	1.0	200.8/200.7	6 months
Magnesium	1.0	200.8/200.7	6 months
Potassium	1.0	200.8/200.7	6 months
Sodium	1.0	200.8/200.7	6 months
Common Anions⁽²⁾			
Sulfate	None	375.2	28 Days
Bicarbonate	None	2320B	14 Days
Carbonate	None	2320B	14 Days
Chloride	None	325.3	28 Days

1 PQL = Practical Quantitation Limit in milligrams per liter (mg/L)

2 Surface water parameters will be analyzed as total recoverable (unfiltered); for the select stations shown in Table 2, both total and dissolved metals will be analyzed.

TABLE 6 SUPPLEMENTAL SURFACE WATER SAMPLE SITE MONITORING OBJECTIVE 2008/2009 Work Plan		
Site Name	Location	Monitoring Objective
Daisy Creek Drainage		
DCT-7	Daisy Cr. tributary south of McLaren Pit	Establishes water quality conditions upgradient of pit influence
DCT-8	Daisy Cr. tributary south of McLaren Pit	Measure impacts from capped area
DCT-9	Daisy Cr. tributary south of McLaren Pit	Measure impacts from capped area
USGS-1700	Daisy Cr. tributary south of McLaren Pit	Impacted by McLaren Mine drainage
Cover Drains	McLaren Pit drains beneath cover (DCSW-101, -102, -103)	Drainage from beneath capped area
USGS-11890	Stillwater River below the mouth of Daisy Creek	Determine water quality conditions in Stillwater River below the mouth of Daisy Creek
Fisher Creek Drainage		
FCT-12	Tributary draining unmined area below Fisher Mountain	Background condition for unmined area
FCT-11	Tributary draining the Como Basin	Como Basin contribution to Fisher Creek
FC-4	Fisher Creek just above the Gold Dust Adit tributary (USGS synoptic station 1,704 meters)	Station below notable groundwater input to Fisher Creek with historic data; evaluates water quality changes in Fisher Creek from Glengarry Mine closure
Miller Creek Drainage		
SW-5	Miller Creek near mouth	Miller Creek input to Soda Butte Creek
Soda Butte Creek Drainage		
SBT-3	Soda Butte Creek Tributary below Repository Site	Measures potential impacts immediately below repository
SBT-6	Soda Butte Creek Tributary below Repository Site	Measures potential impacts further downstream of repository

Adit Station No.	Site Name	Drainage	Flow (gpm) ^(1,2)	Exceedance ^(1,3)
F-8B	Glengarry Millsite Adit	Fisher	1.12 – 1.75	Fe, Mn
F-28	Gold Dust Adit	Fisher	3.69 – 4.55	Fe, Mn
FCSI-96-5	Lower Tredennic Dump 1	Fisher	0.26 – 1.81	Fe, Mn
D-18	McLaren Adit	Daisy	4.60 – 4.80	Fe, Mn
M-8	Black Warrior Adit	Miller	0.11 – 0.25	Cd, Fe, Pb, Mn, Zn
M-1	Little Daisy Adit	Miller	5.52 – 6.35	Fe, Pb, Mn
M-25	Henderson Mt Adit	Miller	0 – 0.002	Fe, Pb
AE-17	Henderson Mountain Dump 7	Fisher	0	--

- Notes: 1 Data from August and September 2007 monitoring events
 2 gpm = gallons per minute
 3 Exceedance of water quality human health standard or guideline in 2007 samples; Cd = cadmium; Fe = iron; Mn = manganese; Pb = lead; Zn = zinc

2.4 GROUNDWATER MONITORING

Groundwater monitoring will be conducted in 2008 at the wells shown in **Tables 8 and 9**. Well locations are shown on **Figures 4 and 5**. Groundwater monitoring activities are discussed in the following subsections.

2.4.1 Fisher Creek Groundwater Monitoring

Wells scheduled for the long-term monitoring event will be monitored one time in 2008 in July (**Table 8**). These wells have generally been monitored annually since well installation. Monitoring will be conducted in July when water levels at the higher elevation sites are typically at the highest level reached during the year. Past experience has shown that water quality is generally more mineralized and contains higher concentrations of contaminants during this high water level period. Field parameters and water level (or flow rate if well is artesian) will also be measured in well FCGW-100, the Glengarry Adit well, once per month beginning in July and ending in September.

The July long-term groundwater monitoring event will involve measuring water levels, measuring field parameters, and collecting samples for laboratory analysis. **Table 10** lists field parameters that will be measured and **Tables 11 and 12** list groundwater analytical parameters and practical quantitation limits (PQLs).

TABLE 8 FISHER CREEK AND REPOSITORY WELL MONITORING 2008/2009 Work Plan							
Well No.	Year Installed	Completion Formation	Monitoring Event				
			May	July	Aug	Sep	Continuous
Fisher Creek Area							
EPA-11	1996	Tertiary Intrusive Dike	--	X	F	F	--
EPA-12	1996	Scotch Bonnet Diorite	--	X	F	F	--
FCGW-100	2004	Glengarry Adit behind plugs	--	X	F	F	--
MW-1	1989	Wolsey Shale	--	X	--	--	--
MW-9A	1990	Alluvium	--	X	--	--	--
MW-9B	1990	Precambrian	--	X	--	--	--
MW-10A	1990	Alluvium	--	X	--	--	--
MW-10B	1991	Precambrian	--	X	--	--	--
MW-11	1990	Precambrian	--	X	--	--	--
SB-16	1991	Precambrian	--	X	--	--	--
Tracer-5	1997	Fisher Mtn. Intrusive	--	X	--	--	--
New World Waste Repository							
SBGW-105T	1999	Till	X	X	--	--	W
SBGW-105	1999	Granite	X	X	--	--	--
SBGW-107T	1999	Till	X	X	--	--	W
SBGW-107	1999	Granite	X	X	--	--	--
SBGW-108T	1999	Till	X	X	--	--	--
SBGW-108	1999	Granite	X	X	--	--	--

Note: X Samples collected and analyzed for full suite of laboratory parameters.
 F Samples collected and monitored for field parameters only.
 W Continuous water level monitoring.
 -- Indicates no monitoring

**TABLE 9
MCLAREN PIT AREA MONITORING WELLS
SCHEDULED FOR SAMPLING IN 2008
2008/2009 Work Plan**

Well No.	Year Installed	Completion Formation	Monitoring Event	
			July	September
DCGW-100	2003	Meagher Limestone	X	F
DCGW-101S	2001	Colluvium	X	F
DCGW-101D	2001	Lulu Pass Rhyodacite Porphyry	X	F
DCGW-111S	2003	Colluvium	X	F
DCGW-111D	2003	Bedrock	X	F
Tracer-2	1997	Fisher Mtn. Intrusive	X	F
MW-2	1989	Wolsey Shale	X	F
MW-3	1989	Wolsey Shale	X	--
DCGW-103S	2001	Colluvium	F	--
DCGW-103D	2001	Bedrock	F	--
DCGW-104 ¹	2001	Waste Rock	X	F
DCGW-105 ¹	2001	Waste Rock	X	F
DCGW-106	2002	Colluvium	F	--
DCGW-107	2002	Colluvium	X	--
DCGW-108	2002	Colluvium	X	--
DCGW-109	2002	Colluvium	F	--
DCGW-110	2002	Colluvium	F	--
DCGW-112	2002	Colluvium	F	--
DCGW-131	2002	Colluvium	F	F
DCGW-132	2002	Colluvium	X	F
DCGW-133	2002	Colluvium	X	F
DCGW-134	2002	Colluvium	F	F
DCGW-135	2002	Colluvium	F	F
DCGW-136	2002	Colluvium	X	F
DCGW-137	2002	Colluvium	X	F
DCGW-138	2002	Colluvium	X	--

Notes: X Indicates well will be sampled for full suite of laboratory parameters along with depth to water and field parameters

F Indicates only depth to water and field parameters monitored

¹ Continuous water level monitoring

-- Indicates no monitoring

TABLE I0 GROUNDWATER FIELD PARAMETERS 2008/2009 Work Plan			
Parameter	SOP Number⁽¹⁾	SOP Title	Event
Specific Conductance	SOP-05	Field Measurement of Specific Conductance	All
pH	SOP-06	Field Measurement of pH	All
Water Temperature	SOP-07	Field Measurement of Water Temperature	All
Oxidation-Reduction	SOP-28	Field Measurement of Redox Potential (Eh)	All
Dissolved Oxygen	SOP-08	Field Measurement of Dissolved Oxygen	All
Depth to Water	SOP-20	Field Measurement of Groundwater Level	All

1 Maxim Standard Operating Procedures (Appendix A, Site-Wide SAP)

TABLE I1 GROUNDWATER SAMPLING REQUIREMENTS 2008/2009 Work Plan		
Parameter	Preservation⁽¹⁾	Bottle Size/Type
Dissolved Metals	Filtered through 0.45 micron filter; HNO ₃ to pH < 2; Iced to 4°C	250 milliliter polyethylene
Common Ions/Physicochemical	Iced to 4°C	500 milliliter polyethylene

1 HNO₃ = nitric acid

2.4.2 McLaren Pit Groundwater Monitoring

Extensive monitoring will be conducted in the McLaren Pit area (**Table 9**), as was done in previous years, to closely monitor changes in groundwater conditions that may result from the capping of the McLaren Pit waste rock, which was capped in 2003. McLaren Pit wells will be monitored in July, when water levels are at or near seasonal highs, and once again in September/October.


Monitoring will involve measuring water levels, measuring field parameters, and collecting samples for laboratory analysis. As shown in **Table 9**, samples will only be collected from select wells for laboratory analysis in July, with the remaining wells slated for measurement of field parameters only. In September, only field parameters will be measured (**Table 10**). Groundwater samples will be submitted to an analytical laboratory for analysis of parameters listed in **Table 12**.

2.4.3 New World Repository Monitoring

Groundwater monitoring will be conducted at the New World waste repository in accordance with the methods and procedures described in the New World Waste Repository Long-Term Monitoring Plan (Maxim, January 2006). Groundwater monitoring includes measuring depth to water in the repository sump and monitoring groundwater in the monitoring well network established at the site.

Monitoring will include maintaining and downloading water level data from the continuous water level instrument and collecting water quality samples. Water quality parameters are listed in **Table 5** for the sump. If the sump fills to capacity with water, water in the sump will be pumped into appropriate water trucks and disposed at the Cody, Wyoming, sewage treatment ponds.

Groundwater monitoring will be conducted at the three well pair locations SBGW-105, -107, and -108 and include maintaining and downloading water level data from the continuous water level instruments installed in wells SBGW-105T and SBGW-107T and collecting water quality samples. Well locations are shown on **Figure 3**. Repository wells will be sampled twice: in late May when water levels are typically at the highest level reached during the year and in July after water levels have fallen to seasonal lows. Groundwater samples will be submitted to an analytical laboratory for analysis of parameters listed in **Table 12**.

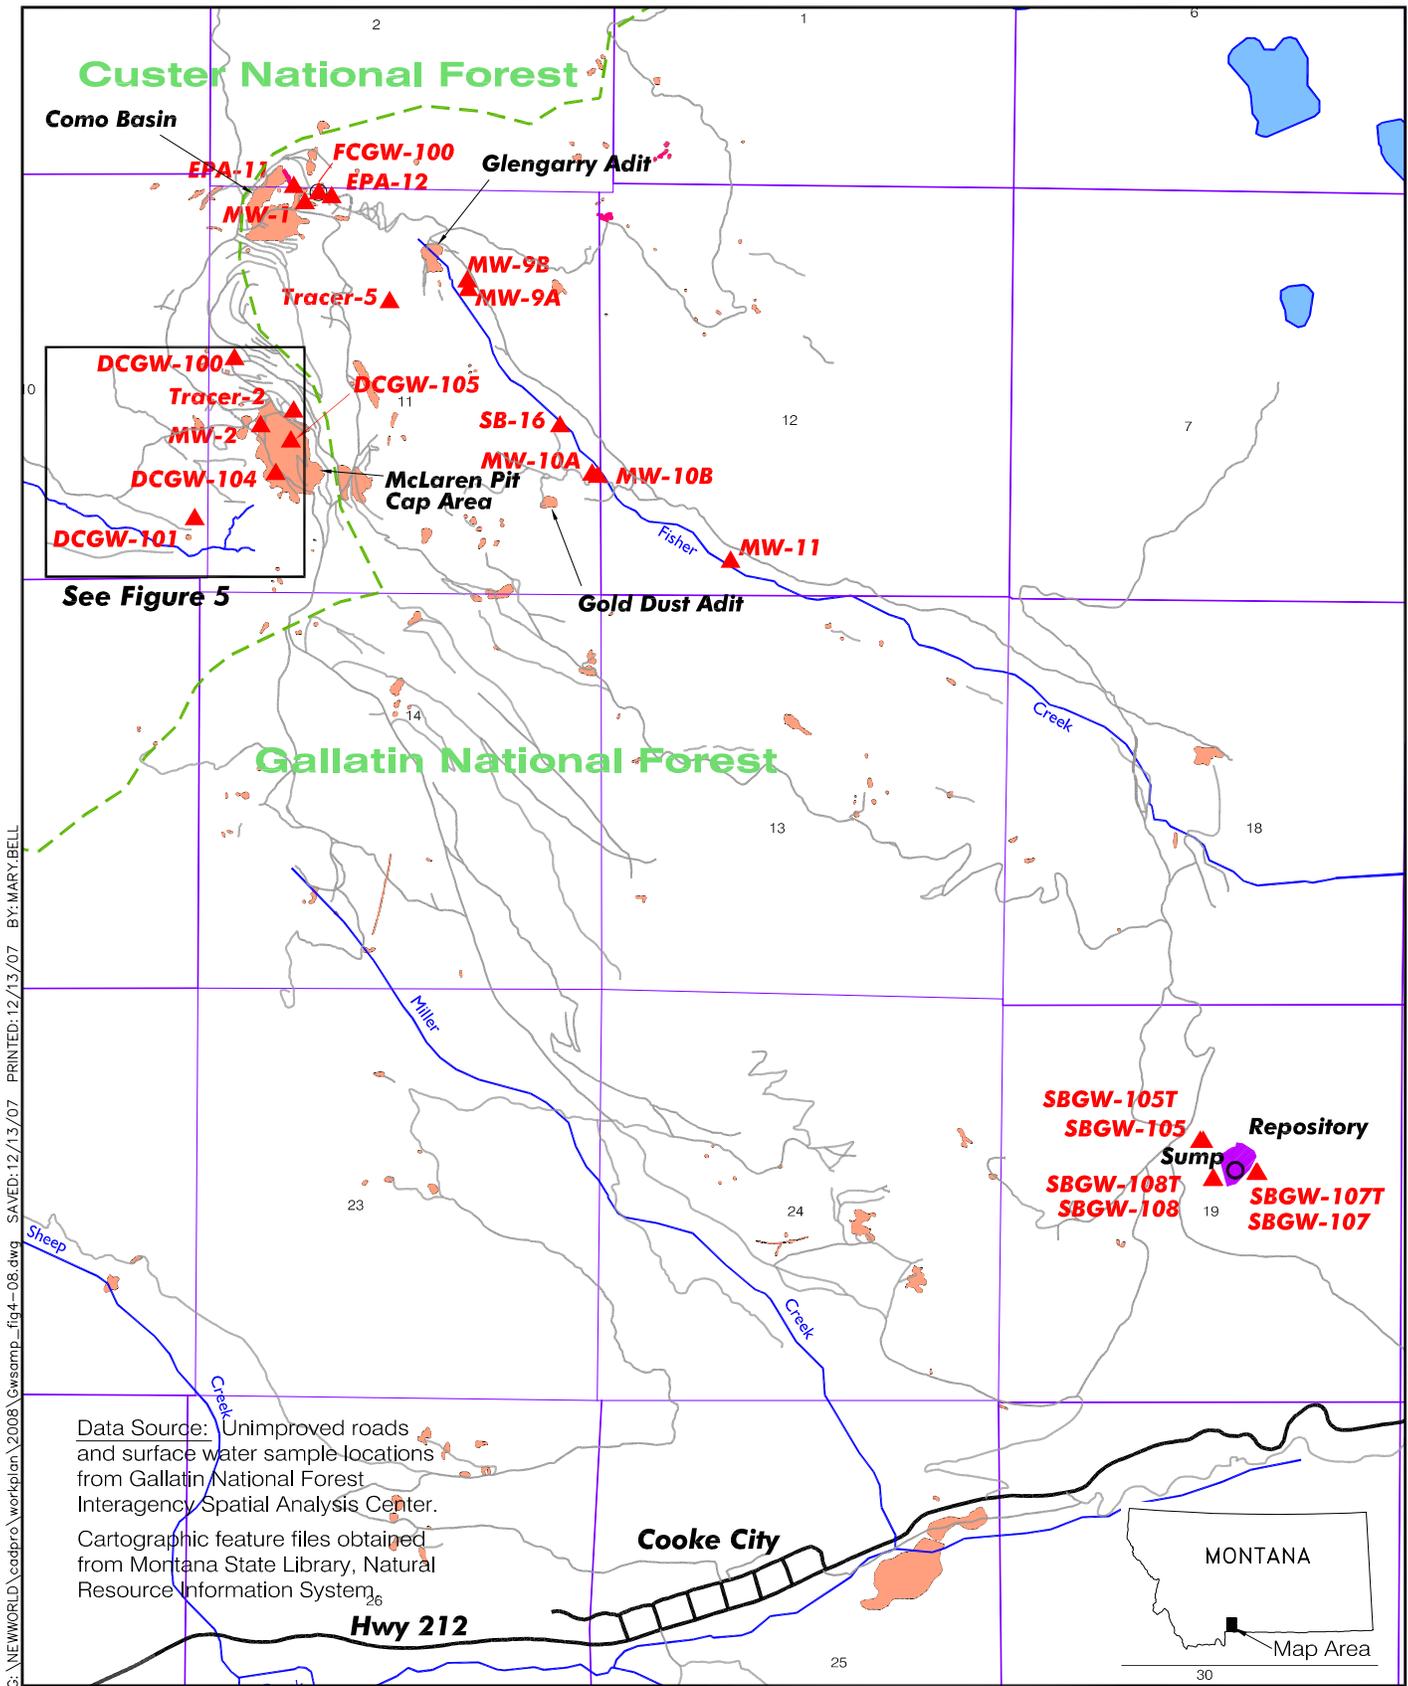

G:\NEWORLD\cadpro\workplan\2008\Gwsamp_fig4-08.dwg SAVED: 12/13/07 PRINTED: 12/13/07 BY: MARYBELL



0 Feet 2500



7561506.101

- ▲ **DCGW-100** Groundwater Monitoring Location
- National Forest Boundary
- Mine Waste Source Area
- Unimproved Road

2008 Groundwater Monitoring Stations
 New World Mining District
 Response and Restoration Project
 Cooke City Area, Montana
FIGURE 4

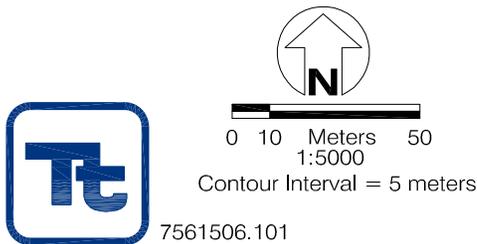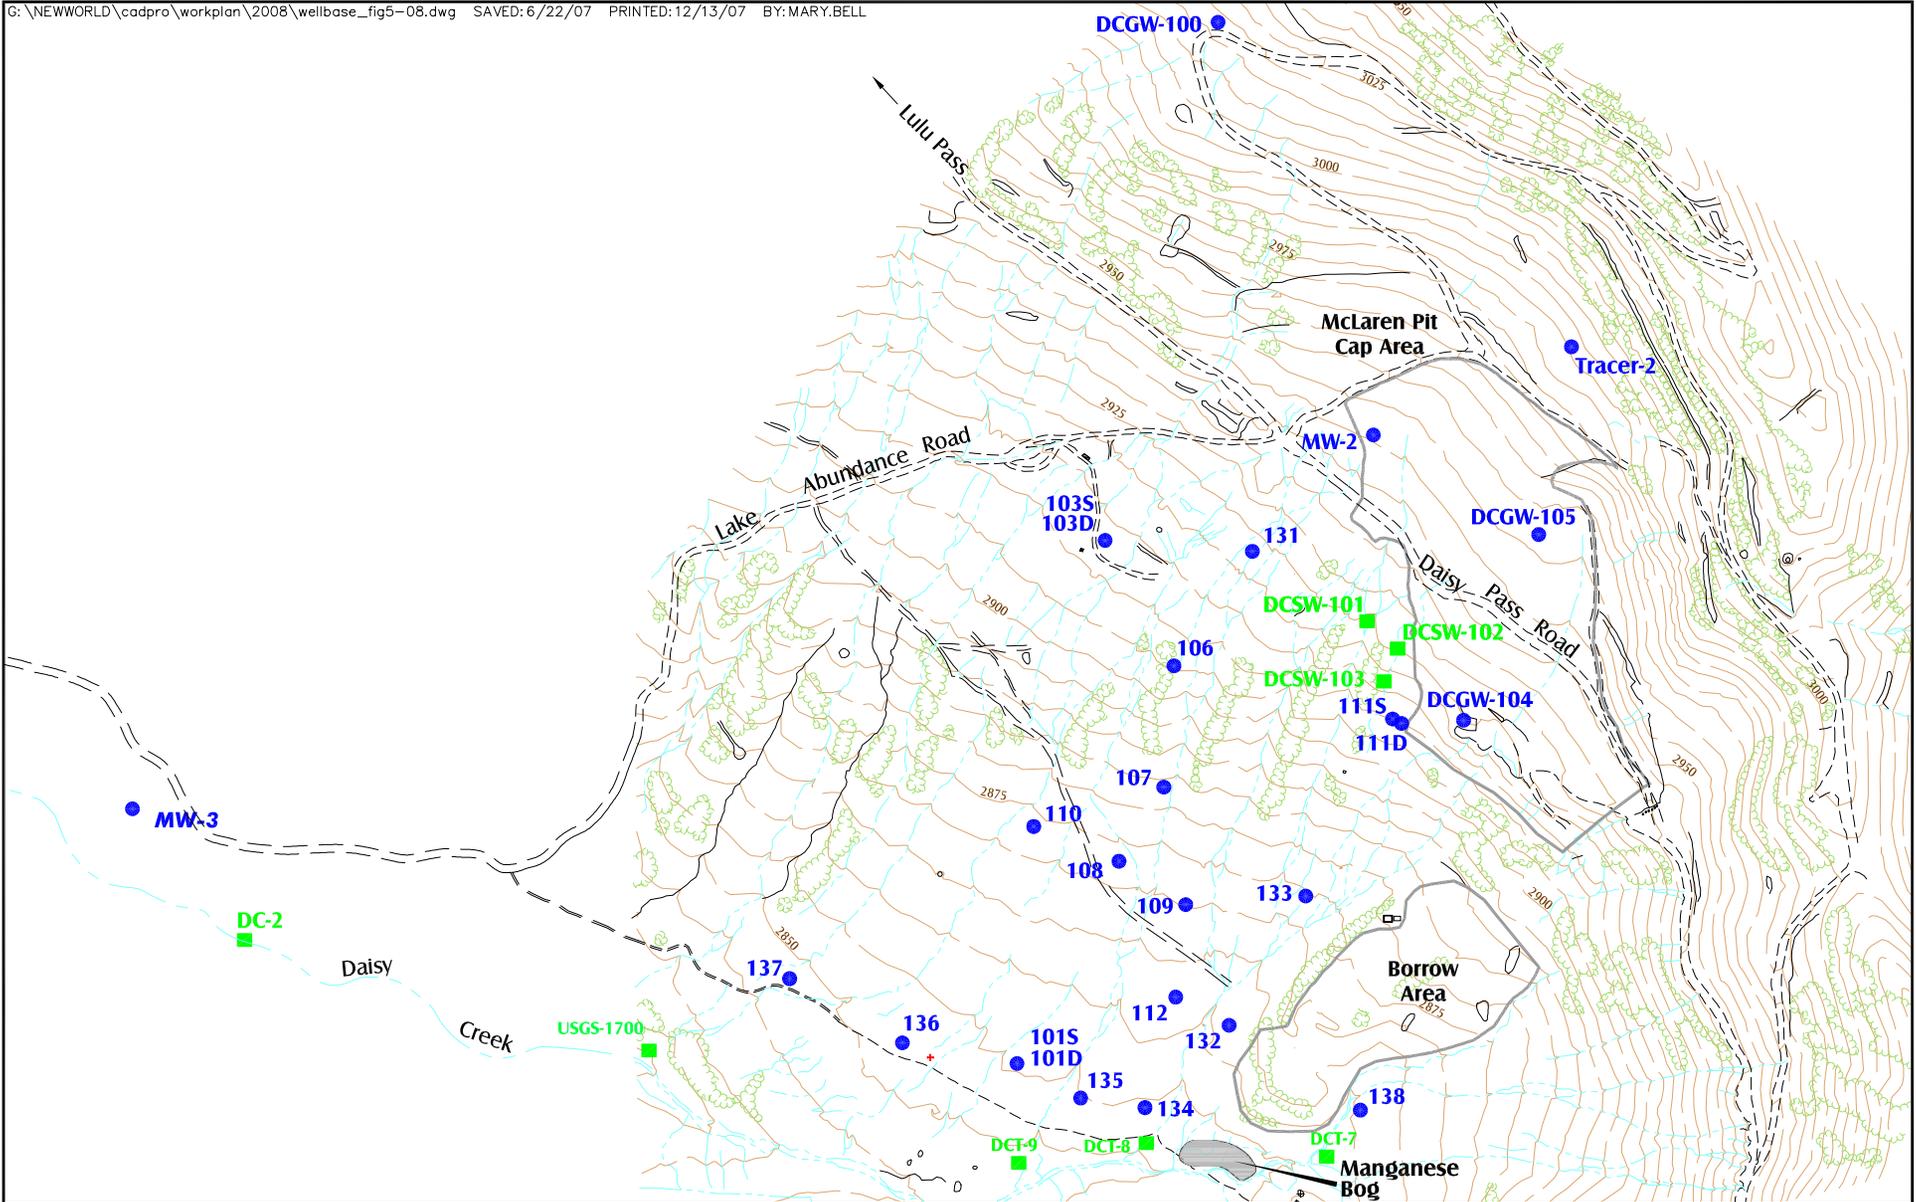

- Surface Water Station
- 101 Monitoring Well (DCGW prefix not included)
- Creek/Drainage
- - - - - Road/Trail

2008 McLaren Pit Area Monitoring Stations
 New World Mining District
 Response and Restoration Project
 Cooke City Area, Montana
FIGURE 5

**TABLE 12
GROUNDWATER ANALYTICAL REQUIREMENTS
2008/2009 Work Plan**

Parameter	PQL (mg/l) ⁽¹⁾	EPA Method No.	Max. Holding Time
Physicochemical			
Specific Conductivity	None	2310B	28 days
pH	None	150.1	Upon arrival at lab
Total Dissolved Solids	None	2340C	7 days
Hardness	None	2340B	6 months
Acidity	None	305.1	14 days
Metals⁽²⁾			
Aluminum	0.05	200.8/200.7	6 months
Cadmium	0.0001	200.8/200.7	6 months
Copper	0.001	200.8/200.7	6 months
Iron	0.01	200.8/200.7	6 months
Lead	0.001	200.8/200.7	6 months
Manganese	0.003	200.8/200.7	6 months
Zinc	0.01	200.8/200.7	6 months
Common Cations⁽²⁾			
Calcium	1.0	200.8/200.7	6 months
Magnesium	1.0	200.8/200.7	6 months
Potassium	1.0	200.8/200.7	6 months
Sodium	1.0	200.8/200.7	6 months
Common Anions⁽²⁾			
Sulfate	None	375.2	28 Days
Bicarbonate	None	2320B	14 Days
Carbonate	None	2320B	14 Days
Chloride	None	325.3	28 Days

1 PQL = Practical Quantitation Limit in milligrams per liter (mg/L)

2 Groundwater parameters will be analyzed as dissolved constituents as filtered through a 0.45 micron filter

2.5 GLENGARRY CHANNEL RECONSTRUCTION

With the closure of the Glengarry Adit and the removal of the Glengarry waste dump in 2005, Fisher Creek was routed into its historic channel, leaving a relict channel that Fisher Creek was diverted into by the historic mining operation. This now abandoned channel, referred to as the Glengarry channel, continues to carry surface water run-off, is susceptible to erosion, and has steep, near-vertical streambanks. To prevent potential headcutting and erosion, several rock check dams will be constructed along the upper portion of the relict channel and rock aprons will be installed at select locations to dissipate stream energy. This natural resource restoration work will be completed in 2008.

2.6 TRAIL RECONSTRUCTION

The Daisy Pass Trail will be reconstructed and portions of the trail will be realigned. The realignment work will occur in the area below Daisy Pass and the former trail will be abandoned and reclaimed. A contract for this work was issued in 2007 with field work to be completed in 2008.

2.7 WILLOW PLANTINGS

Willows will be planted at the Glengarry and Black Warrior Mine sites. Approximately 300 cuttings were sent to the Couer d'Alene Nursery in September, 2007. The cuttings will be ready for planting in fall 2008. Monitoring and assessment of the success of this planting will determine if additional willow plantings will be conducted at the site.

2.8 RECLAMATION MONITORING

Reclamation monitoring in 2008 will involve documenting percent cover and species composition at select sites reclaimed in the Daisy, Miller, and Fisher Creek drainages. The purpose of cover monitoring at these sites is to determine if revegetation cover is meeting the project objectives and the purpose of area-wide monitoring is to determine if there are any erosion problems that warrant immediate attention or whether there are any germination failures in areas greater than 250 square feet. The six reference areas established in 1999 will be revisited and additional reference areas, if needed, will be identified and sampled. **Table 13** lists the sites that will be monitored and the type of monitoring that will be conducted. Reclamation monitoring will be conducted in accordance with monitoring procedures that are described in the Long-Term Revegetation Monitoring Plan (Maxim, 1999e).

If bare or eroded areas are observed during cover monitoring, soil samples will be collected for laboratory analysis. Samples will be collected from a depth interval of 0-15 cm and placed in one-gallon polyethylene bags. Samples will be labeled by location and returned to a qualified laboratory for selected analyses in accordance with the parameters and methods in the Site-Wide SAP for native soil collection. Laboratory parameters may include USDA soil texture, coarse fragment content, organic matter, pH, electrical conductivity, nutrients, and total metals (aluminum, arsenic, cadmium, copper, lead, and zinc). Sample collection and parameter selection will be performed at the discretion of the field investigator to ensure site-specific conditions are being addressed. Following receipt of the laboratory analysis, recommendations will be made to amend soils or reseed barren areas.

TABLE 13
RECLAMATION MONITORING SITES
2008/2009 Work Plan

Site	Year Reclaimed	Monitoring Type	Site	Year Reclaimed	Monitoring Type
Black Warrior	2005	Cover	Glengarry Waste Dump	2006	Cover
Little Daisy	2005	Cover	Gold Dust	2006	Cover
Como Basin	2006	Cover	New World Repository	2006	Cover

2.9 ABANDON NEUTRON PROBE ACCESS TUBES

Nine neutron probe access tubes were installed in the McLaren Pit to monitor moisture conditions in the pit backfill. Because moisture monitoring is no longer conducted the access tubes will be abandoned by filling with bentonite pellets or chips placed in a manner that will prevent bridging. Metal casings shall be cut off below the ground surface well above the geo-synthetic liner. Voids left after removing the upper portion of the access tube will be backfilled with native soils, hand compacted, and the site reseeded. There will be no disturbance of the geo-synthetic liner.

2.10 PREPARE 2009/2010 WORK PLAN

A work plan similar to this plan will be prepared to guide specific work activities to be completed during 2009/2010. These activities will complement those performed under the long-term plans and will involve surface water, groundwater, and revegetation monitoring, construction monitoring, and construction activities.

2.11 PREPARE 2008 PROJECT SUMMARY

A summary will be prepared to document project activities completed since 1999.

3.0 PROJECT SCHEDULE

Figure 6 illustrates the schedule for 2008/2009 activities.

FIGURE 6
NEW WORLD MINING DISTRICT RESPONSE AND RESTORATION PROJECT
2008/2009 PROJECT SCHEDULE

Task Name	Jan '08	Feb '08	Mar '08	Apr '08	May '08	Jun '08	Jul '08	Aug '08	Sep '08	Oct '08	Nov '08	Dec '08	Jan '09	Feb '09	Mar '09	Apr '09	May '09	Jun '09
Community Relations	[Solid Blue Bar]																	
Maintain Project Website/Database	[Solid Blue Bar]																	
Prepare 2008/2009 Work Plan	[Solid Blue Bar]																	
Prepare Project Summary 2008							[Vertical Blue Bar]											
Repository Sump Monitoring	[Solid Blue Bar]																	
Perform Spring Water Quality Mon.				[Vertical Blue Bar]														
Perform May Repository Groundwater Monitoring					[Vertical Blue Bar]													
Perform High Flow Surface Water Monitoring						[Vertical Blue Bar]												
Perform July Groundwater Sampling						[Solid Blue Bar]												
McLaren Pit Area September Groundwater Monitoring																		
Trail Construction								[Solid Blue Bar]										
Revegetation Monitoring									[Vertical Blue Bar]									
Perform Fall Surface Water Quality Monitoring										[Vertical Blue Bar]								
Prepare 2009/2010 Work Plan																		
	[Solid Blue Bar]																	

4.0 REPORTS

Project documents will be prepared during 2008/2009 for many of the items discussed in Section 2.0. These documents are summarized in **Table 14** along with a description of the document contents and approximate delivery schedule.

Deliverable Title	Contents	Delivery Schedule
2008/2009 Work Plan	This Document	Draft – March 2008 Final – July 2008
Project Summary 2008	Summary document of project activities completed since 1999	July 2008
Reclamation Monitoring Report	Reclamation monitoring results	January 2009
2008 Surface Water and Groundwater Monitoring Report	Results and analyses of ongoing surface water, groundwater, and moisture monitoring	February 2009
2009/2010 Work Plan	Proposed activities for 2009/2010	Draft – March 2009 Final – June 2009

This page intentionally left blank.

5.0 REFERENCES

- EPA, 1993. Guidance on Conducting Non-Time-Critical Removal Actions Under CERCLA. EPA/540-R-93-057. Publication 9360.0-32. Office of Emergency and Remedial Response. Washington D.C. August.
- EPA, 1986. Test Methods for Evaluating Solid Waste – Physical/Chemical Methods, SW-846.
- Maxim Technologies, 2006a. 2006/2007 Work Plan. New World Mining District Response and Restoration Project. Final. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. October.
- Maxim Technologies, 2006b. Project Summary 2006. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. June.
- Maxim Technologies, 2006c. New World Waste Repository Long-Term Monitoring Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. July.
- Maxim Technologies, 2005a. 2005/2006 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. July.
- Maxim Technologies, 2005b. Project Summary 2005. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies, 2005c. Draft Technical Memorandum – 2004 Reclamation Monitoring Results. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. January 31.
- Maxim Technologies, 2004a. 2004/2005 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies, 2004b. Project Summary 2004. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies, 2004c. Miller Creek Response Action Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. January.
- Maxim Technologies, 2003a. 2003/2004 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. May.
- Maxim Technologies, 2003b. Project Summary 2003. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies, Inc., 2003c. Revised Support Document and Implementation Plan for Temporary Water Quality Standards. New World Mining District Response and Restoration Project. Prepared for USDA Forest Service, Northern Region. May 20.

- Maxim Technologies, 2002a. 2002/2003 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. July 22.
- Maxim Technologies, 2002b. Project Summary 2002. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies, 2002c. Progress Report, Temporary Water Quality Standards, 3-Year Review, New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. April 15.
- Maxim Technologies, 2002d. Como Basin/Glengarry Adit/Fisher Creek Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies, 2001a. 2001 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June 25.
- Maxim Technologies, 2001b. Project Summary 2001. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, August.
- Maxim Technologies, 2001c. Selective Source Response Action Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. January.
- Maxim Technologies, 2001d. McLaren Pit Response Action Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. December.
- Maxim Technologies, 2000. 2000 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, March 10.
- Maxim Technologies, 1999a. Overall Project Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies, 1999b. 1999 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies, 1999c. Community Relations Plan. New World Mining District Response and Restoration Project. Appendix C of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies, 1999d. Long-Term Surface Water Quality Monitoring Plan. New World Mining District Response and Restoration Project. Appendix D of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies, 1999e. Long-Term Revegetation Monitoring Plan. New World Mining District Response and Restoration Project. Appendix E of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.

Maxim Technologies, 1999f. Site-Wide Sampling and Analysis Plan. New World Mining District Response and Restoration Project. Appendix B of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.

Montana Department of Environmental Quality (MDEQ). 2002. Circular WQB-7 Montana Numeric Water Quality Standards, Planning, Prevention and Assistance Division, Standards and Economic Analysis Section, January.

Stanley, D., and Maxim Technologies, Inc., 1998. Support Document and Implementation Plan. Submitted by Crown Butte Mines, Inc. in Support of Its Petition for Temporary Modification of Water Quality Standards for Selected Parameters for Fisher and Daisy Creeks and a Headwater Segment of the Stillwater River, Park County, Montana.

Tetra Tech, 2006. Adit Discharge Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Draft. Prepared for the USDA Forest Service, Gallatin National Forest, December.

Tetra Tech, 2007. 2007/2008 Work Plan. New World Mining District Response and Restoration Project. Final. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. October.