


PANTHER THIN STWD
Contract Area Map
HEBO RANGER DISTRICT
SIUSLAW NATIONAL FOREST

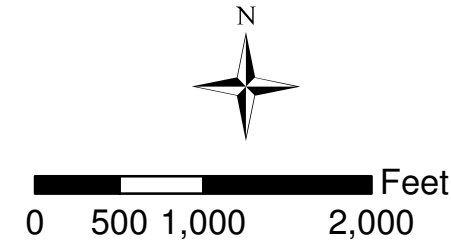

Legend

- Contract Area Boundary, B.1
- Subdivision Boundary and Number, B.1, C.3; Stewardship Projects #1 - Small Tree-Topping and #2 - Down Wood Creation, K-G.9#
- Stewardship Project # 3 - Road Storage, Roads 1888111 and 1888118, K-G.9#
- Existing Road, F.1.2
- Specified Road Reconstruction, F.2, A.7
- Unsuitable for use prior to Reconstruction, F.1.2, K-F.1.2#
- Hauling restricted, F.1.2, K-F.1.2#
- Protect Streamcourse, G.5, K-G.4.1#
- Protect coho salmon stream or tributary, K-G.4.2#
- Protect Known Survey Monument, G.2.3
- Protect Improvements - Gate, G.2.2
- Other Ownership, G.2.2.1, K-G.4.2#

SUBDIVISION	DESIGNATED CUT SPECIES	INDIVIDUAL TREE DESIGNATION, K-C.3.5.7#
20, 22, 25*	Douglas-fir, western hemlock, Sitka spruce, and red alder	DxD spacing 15 feet
29*	Douglas-fir, western hemlock, Sitka spruce, and red alder	DxD spacing 13 feet
30	Douglas-fir, western hemlock, Sitka spruce, and red alder	DxD spacing 12 feet
31	Douglas-fir, western hemlock, Sitka spruce, and red alder	DxD spacing 13 feet

*Cut all live designated cut species meeting minimum specifications in A.2 within 30 feet of a tree marked with a horizontal orange tracer paint band around it and stump mark. Apply DxD outside the 30 foot cut area around banded trees. K-C.3.5.7#

Notes

Subdivision boundaries are tagged with blue boundary tags and painted with orange tracer paint, B.1. Contractor shall scatter or pile and cover slash landing slash in entire Contract Area, K-G.7.4.2# (Option 2). Directional Felling is required in all subdivisions, G.4.1, K-G.4.1#. Specified Roads are Subdivision R/W. Land lines are approximate.