

Table of Contents

Preface	3
101 - Terms, Format, and Definitions.....	4
101.01 Meaning of Terms.....	4
101.03 Abbreviations.....	4
101.04 Definitions.....	4
102 - Bid, Award, and Execution of Contract	8
Delete Section 102.....	8
103 - Scope of Work.....	9
Delete Subsections 103.02, 103.03, 103.04, 103.05.....	9
104 - Control of Work	10
Delete Subsections 104.01, 104.02, 104.04.....	10
104.06 Use of Roads by Contractor.....	10
106 - Acceptance of Work.....	11
106.01 Conformity with Contract Requirements.....	11
106.02 Visual Inspection.....	12
107 - Legal Relations and Responsibility to the Public	13
Delete Subsection 107.05.....	13
108 - Prosecution and Progress	14
Delete Section 108.....	14
109 - Measurement and Payment	15
Delete Subsections 109.06, 109.07, 109.08, 109.09.....	15
109.02 Measurement Terms and Definitions.....	15
151 - Mobilization	16
155 - Schedules for Construction Contracts	18
Delete Section 155.....	18
156 - Public Traffic	19
201. — Clearing and Grubbing.....	21
204. — Excavation and Embankment.....	23
212 - Linear Grading.....	34
302 - Minor Crushed Aggregate.....	37
302.04 Placing Crushed Aggregate.....	37
302.05 Compacting and Finishing Crushed Aggregate	37
303 - Road Reconditioning.....	38

303.07 Roadway Reconditioning	38
703 - Aggregate	39
703.05 Subbase, Base, Surface Course, and Screened Aggregate.	39

Preface

Preface_wo_11_14_2018

Delete all but the first paragraph and add the following:

The Forest Service, US Department of Agriculture has adopted FP-14 for construction of National Forest System Roads.

101 - Terms, Format, and Definitions

101.01_National_11_9_2016

Add the following paragraph to Subsection 101.01:

101.01 Meaning of Terms.

Delete all references to the TAR (Transportation Acquisition Regulations) in the specifications.

101.03_National_11_9_2016

Add the following to Subsection 101.03:

101.03 Abbreviations.

(a) Acronyms.

AGAR — Agriculture Acquisition Regulations

AFPA — American Forest and Paper Association

FSAR — Forest Service Acquisition Regulations

MSHA — Mine Safety and Health Administration

NESC — National Electrical Safety Code

WCLIB — West Coast Lumber Inspection Bureau

(f) Miscellaneous unit abbreviations.

MP	—	milepost	location
----	---	----------	----------

ppm	—	parts per million	volume
-----	---	-------------------	--------

STA		station	location
-----	--	---------	----------

101.04_National_9_5_2018

Make the following changes to Subsection 101.04:

101.04 Definitions.

Delete these definitions and replace the following:

Bid Schedule — The Schedule of Items.

Bridge — A structure, including supports, erected over a depression or an obstruction such as water along a road, a trail, or a railway and having a deck for carrying traffic or other loads.

Contractor — The individual or legal entity contracting with the Government for performance of prescribed work. In a timber sale contract, the contractor is the “Purchaser”.

Culvert — Any structure with a bottom, regardless of fill depth, depth of invert burial, or presence of horizontal driving surface, or any bottomless (natural channel) structure with footings that will not have wheel loads in direct contact with the top of the structure.

Drawings — (Public Works Contracts) Design sheets or fabrication, erection, or construction details submitted to the CO by the Contractor according to FAR Clause 52.236-21 Specifications and Drawings for Construction. Also refers to submissions and submittals.

Notice to Proceed — (Public Works Contracts) Written notice to the Contractor to begin the contract work.

Right-of-Way — A general term denoting (1) the privilege to pass over land in some particular line (including easement, lease, permit, or license to occupy, use, or traverse public or private lands), or (2) Real property necessary for the project, including roadway, buffer areas, access, and drainage areas.

Solicitation—(Public Works Contracts) The complete assembly of documents (whether attached or incorporated by reference) furnished to prospective bidders.

Add the following definitions:

Adjustment in Contract Price — “Equitable adjustment,” as used in the Federal Acquisition Regulations, or “construction cost adjustment,” as used in the Timber Sale Contract, as applicable.

Change — “Change” means “change order” as used in the Federal Acquisition Regulations, or “design change” as used in the Timber Sale Contract.

Forest Service — The United States of America, acting through the Forest Service, U.S. Department of Agriculture.

Neat Line — A line defining the proposed or specified limits of an excavation or structure.

Pioneer Road — Temporary construction access built along the route of the project.

Purchaser — The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through agents, employees, or subcontractors.

Protected Streamcourse — A drainage shown on the plans or timber sale area map that requires designated mitigation measures.

Road Order — An order affecting and controlling traffic on roads under Forest Service jurisdiction. Road Orders are issued by a designated Forest Officer under the authorities of 36 CFR, part 260.


Shop Drawings — (Timber and Stewardship Contracts) Referred to as “Drawings” in FP-14, include drawings, diagrams, layouts, schematics, descriptive literature, illustrations, lists or tables, performance and test data, and similar materials furnished by Purchaser to explain in detail specific portions of the work required by the contract.

Utilization Standards —

The minimum size and percent soundness of trees described in Public Works contract specifications or Timber Sale and IRTC contract provisions to determine merchantable timber.

Add Figure 101-1—Illustration of road structure terms:

Figure 101-1—Illustration of road structure terms.

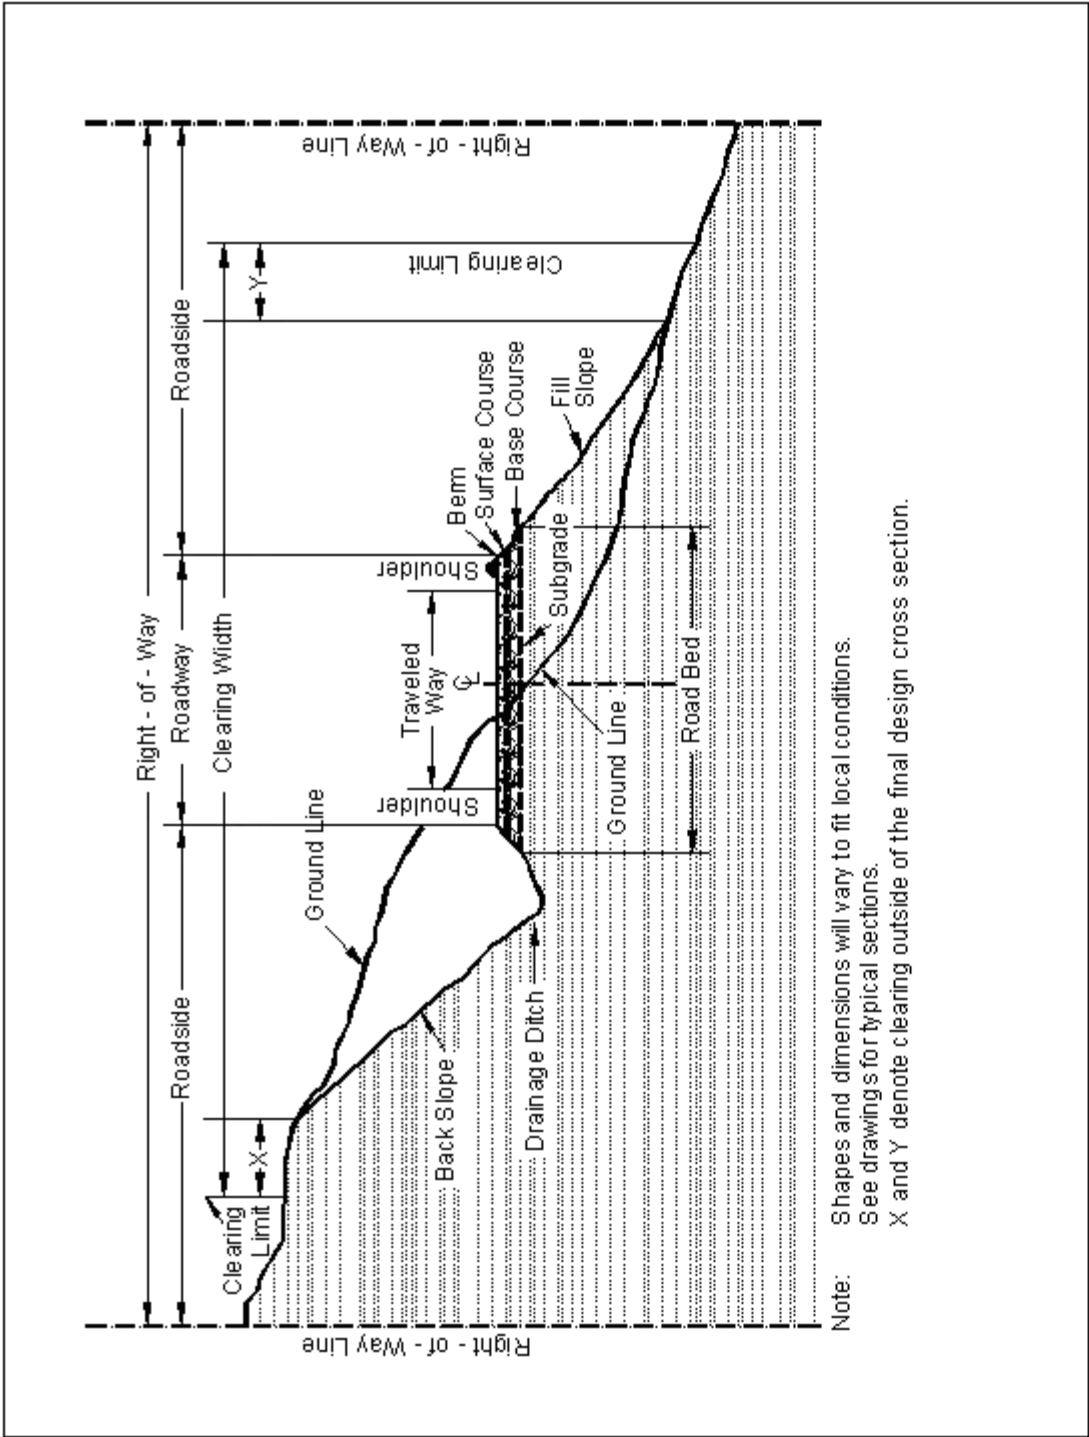

102 - Bid, Award, and Execution of Contract

102.00_National_11_9_2016

Delete Section 102 in its entirety.

Delete Section 102.

103 - Scope of Work

103.00_National_11_9_2016

Delete all of Section 103 except Subsection 103.01 Intent of Contract.

Delete Subsections 103.02, 103.03, 103.04, 103.05.

104 - Control of Work

104.00_National_11_9_2016

Delete Subsections 104.01, 104.02, and 104.04.

Delete Subsections 104.01, 104.02, 104.04.

104.06_National_11_9_2016

Add the following to Subsection 104.06:

104.06 Use of Roads by Contractor.

The Contractor is authorized to use roads under the jurisdiction of the Forest Service for all activities necessary to complete this contract, subject to the limitations and authorizations designated in the Road Order(s) or described in the contract, when such use will not damage the roads or national forest resources, and when traffic can be accommodated safely.

106 - Acceptance of Work

106.01_National_7_18_2017

Delete Subsection 106.01 and replace with the following:

106.01 Conformity with Contract Requirements.

Follow the requirements of FAR Clause 52.246-12 Inspection of Construction.

References to standard test methods of AASHTO, ASTM, GSA, and other recognized standard authorities refer to the methods in effect on the date of solicitation for bids.

Perform all work to the lines, grades, cross-sections, dimensions, and processes or material requirements shown on the plans or specified in the contract.

Incorporate manufactured materials into the work according to the manufacturer's recommendations or to these specifications, whichever is more strict.

Plan dimensions and contract specification values are the values to be strived for and complied with as the design values from which any deviations are allowed. Perform work and provide material that is uniform in character and reasonably close to the prescribed value or within the specified tolerance range. The purpose of a tolerance range is to accommodate occasional minor variations from the median zone that are unavoidable for practical reasons.

When standard manufactured items are specified (such as fence, wire, plates, rolled shapes, pipe conduits, etc., that are identified by gauge, unit mass, section dimensions, etc.), the identification will be considered to be nominal masses or dimensions. Unless specific contract tolerances are noted, established manufacturing tolerances will be accepted.

The Government may inspect, sample, or test all work at any time before final acceptance of the project. When the Government tests work, copies of test reports are furnished to the Contractor upon request. Government tests may or may not be performed at the work site. If Contractor testing and inspection is verified by the Government, the Contractor's results may be used by the Government to evaluate work for acceptance. Do not rely on the availability of Government test results for process control.

Acceptable work conforming to the contract will be paid for at the contract unit bid price. Four methods of determining conformity and accepting work are described in Subsections 106.02 to 106.05 inclusive. The primary method of acceptance is specified in each Section of work. However, work may be rejected at any time it is found by any of the methods not to comply with the contract.

Remove, repair, or replace work that does not conform to the contract, or to prevailing industry standards where no specific contract requirements are noted. Removing, repairing, or replacing work; providing temporary traffic control; and any other related work to accomplish conformity will be at no cost to the Government.

(a) Disputing Government test results. If the accuracy of Government test results is disputed, promptly inform the CO. If the dispute is unresolved after reasonable steps are taken to resolve the dispute, further evaluation may be obtained by written request. Include a narrative describing the dispute and a proposed resolution protocol that addresses the following:

1. Sampling method;
2. Number of samples;
3. Sample transport;

4. Test procedures;
5. Testing laboratories;
6. Reporting;
7. Estimated time and costs; and
8. Validation process.

If the evaluation requires additional sampling or testing be performed, mutually agree with the Government on witnessing procedures and on sampling and testing by a third party laboratory. Use a third party laboratory accredited by the AASHTO accreditation program. Provide proof of the laboratory's accreditation for the test procedures to be used. Do not use the same laboratory that produced the disputed Government test results or that produced the test results used as a basis for the dispute.

The CO will review the proposed resolution protocol and may modify it before final approval and execution.

The Government will use the approved resolution protocol test results to determine the validity of the disputed testing. If the Government test results are validated, the Contractor will be responsible for all costs associated with developing and performing the resolution protocol. If the Government test results are not validated, the Government will be responsible for all costs associated with developing and performing the resolution protocol. If the validity of the Government test results cannot be determined, the Contractor and Government will equally share all costs associated with developing and carrying out the resolution protocol.

(b) Alternatives to removing and replacing non-conforming work. As an alternative to removal and replacement, the Contractor may submit a written request to:

1. Have the work accepted at a reduced price; or
2. Be given permission to perform corrective measures to bring the work into conformity.

The request must contain supporting rationale and documentation. Include references or data justifying the proposal based on an evaluation of test results, effect on service life, value of material or work, quality, aesthetics, and other tangible engineering basis. The CO will determine disposition of the nonconforming work.

106.02_National_11_9_2016

Delete Subsection 106.02 and replace with the following:

106.02 Visual Inspection.

Acceptance is based on visual inspection of the work for compliance with the specific contract requirements. Use prevailing industry standards in the absence of specific contract requirements or tolerances.

107 - Legal Relations and Responsibility to the Public

107.05_National_7_18_2017

Delete Subsection 107.05.

Delete Subsection 107.05.

108 - Prosecution and Progress

108.00_National_11_9_2016

Delete Section 108 in its entirety.

Delete Section 108.

109 - Measurement and Payment

109.00_National_11_9_2016

Delete Subsections 109.06, 109.07, 109.08, and 109.09:

Delete Subsections 109.06, 109.07, 109.08, 109.09.

109.02_National_11_9_2016

Add the following sentence to Subsection 109.02(b):

109.02 Measurement Terms and Definitions.

(b) Contract quantity.

Contract quantities will be adjusted only when there are errors in the original design of 15% or more.

151 - Mobilization

Delete Section 151 in its entirety and replace with the following.

Description

151.01. This work consists of moving personnel, equipment, material, and incidentals to the project and performing all work necessary before beginning work at the project site; obtaining of permits, insurance, and bonds. This work also includes washing and treating construction equipment and vehicles necessary for equipment transport to remove seeds, plants, and plant fragments before the equipment is used on Forest Service lands, according to the requirements within.

Construction Requirements

151.02. Wash the sides, tops, and undercarriages of all construction equipment. Remove all seeds, plants, plant fragments, dirt, and debris from the construction equipment. Only equipment inspected by the Forest Service will be allowed to operate within the project area. All subsequent move-ins of equipment to the project area will be treated in the same manner as the initial move-in. This requirement does not apply to cars, pickup trucks, and other vehicles that regularly travel between the construction site and areas off the National Forest.

Equipment will be considered free of soil, seed, and other such debris when a visual inspection does not disclose such material. Disassembly of equipment, components or the need for specialized inspection tools is not required.

Notify the CO in writing at least 72 hours before moving any construction equipment onto the national forest. Notification will include an agreed upon location where the equipment will be available for inspection by the Forest Service. Inspection will be required after every cleaning.

Use methods of cleaning and locations for cleaning approved by the CO.

For work at a commercial washing facility, use an approved facility.

New infestations of noxious weeds of concern to Forest Service and identified by either Contractor or Forest Service, in the Project Area or on the haul route, will be promptly reported to the other party. Contractor and Forest Service will agree on treatment methods to reduce or stop the spread of noxious weeds when new infestations are found. A current list of noxious weeds of concern to Forest Service is available at each Forest Service office.

Aquatic:

Wash the outside and inside of equipment that will come in contact with waterbodies, such as streams, lakes, wetlands, and ditches with one of the following approved methods:

1. Wash debris, mud, sediments, organisms, plant material and fragments from all equipment that will enter water feature. Allow equipment to thoroughly air dry (inside and out) for a minimum of 48 hrs
2. Wash equipments with heated water (>140° F) for a minimum of ten minutes and until all mud, sediments, organisms, plant material and fragments are removed from equipment. Allow equipment to thoroughly air dry for a minimum of two hours, or until no visible moisture exits.
3. Wash equipment with a minimum of 5% Quaternary ammonium solution (Quat128 Sparquat256) for a minimum of ten minutes and until all mud, sediments, organisms, plant material and fragments are removed from equipment. Allow equipment to thoroughly air dry for a minimum of two hours, or until no visible moisture exits.

Only equipment inspected by the Forest Service will be allowed to operate within the project. All subsequent move-ins of equipment to the project area will be treated in the same manner as the initial move-in

Equipment will be considered free of debris, mud, sediments, organisms, plant material and fragments when a visual inspection does not disclose such material. Disassembly of equipment, components or the need for specialized inspection tools is not required.

Measurement

151.03 Clean equipment prior to moving onto this project. The initial cleaning will not be included in the measurement for payment. Payment for cleaning will only be made if subsequent cleanings are ordered by the CO. Measurement shall be on an "each" basis, meaning one complete cleaning of all equipment required for this contract. Subsequent cleanings necessitated by the Contractor's actions but not directed by the CO will not be included in the measurement for payment.

Measure mobilization according to Subsection 109.02.

Payment

151.04 The accepted quantity, measured as provided in Subsection 109.02, will be paid at the contract price per unit of measurement for the Section 151 pay item shown in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Progress payments for mobilization lump sum will be paid as follows:

- (a) When 5 percent of the original contract amount is earned from other bid items, 50 percent of the mobilization item, or 5 percent of the original contract amount, whichever is less, will be paid.
- (b) When 10 percent of the original contract amount is earned from other bid items, 100 percent of the mobilization item, or 10 percent of the original contract amount, whichever is less, will be paid.
- (c) Any portion of the mobilization item in excess of 10 percent of the original contract amount will be paid after final acceptance.

Include all costs associated with the initial cleaning of equipment in the unit bid price for Mobilization. Cleaning for subsequent move-ins will not be paid for unless after a suspension ordered by the CO.

155 - Schedules for Construction Contracts

155.00_National_11_9_2016

Delete Section 155 in its entirety.

Delete Section 155.

156 - Public Traffic

156.00_National_11_4_2016

Delete Section 156 in its entirety and replace with the following:

Description

156.01 This work consists of controlling and protecting public traffic adjacent to and within the project.

Material

156.02 Conform to the MUTCD and the following Sections and Subsections:

Permanent Traffic Control	633
Traffic Signing and Marking Material	718
Concrete Barriers and Precast Guardwalls	618
Temporary plastic fence	710.11

Construction Requirements

156.03 General. Accommodate traffic according to MUTCD, approved traffic control plan and this section. Perform work in a manner that ensures safety and convenience of the public. Unless otherwise provided for in Table 156-1, keep existing roads open to all traffic during road improvement work, and maintain them in a condition that will adequately accommodate traffic. Delays may not exceed <30> minutes at any one time followed by an open period of no less than <5> minutes. Accommodate public traffic on roads adjacent to and within the project until the project is accepted according to Subsection 106.07(b).

Submit traffic control plan at scheduled pre-work meeting; prior to intended use. Perform no work that interferes or conflicts with traffic or existing access to the roadway surface until a traffic control plan has been approved.

Install construction signs and traffic control devices in conformance with MUTCD and Forest Service EM 7100-15. All required signs will be in place and approved prior to beginning work on project.

If the Contractor agrees in writing to allow public traffic to use a new road being constructed prior to completion, it will be considered an existing road for traffic control purposes.

156.04 Temporary Traffic Control. Install and maintain temporary traffic control devices adjacent to and within the project as required by the approved traffic control plan and the MUTCD. Install and maintain traffic control devices as follows:

- (a) Furnish and install traffic control devices before the start of construction operations.
- (b) All detours outside of clearing limits will be approved in writing by the Contracting Officer as part of the traffic control plan.
- (c) Install only those traffic control devices needed for each stage or phase.
- (d) Relocate temporary traffic control devices as necessary.

- (e) Remove devices that no longer apply to the existing conditions.
- (f) Immediately replace any device that is lost, stolen, destroyed, or inoperative.
- (g) Keep temporary traffic control devices clean.
- (h) Remove all temporary traffic control devices upon contract completion or when approved.
- (i) When required, use flaggers certified by the American Traffic Safety Services Association, the National Safety Council, the International Municipal Signal Association, a state agency, or other acceptable organization. Perform the work described under MUTCD Part 6. Use type III, VII, VIII, or IX retroreflective sheeting on flagger paddles. Do not use flags. Flaggers must wear high visibility safety apparel as required by MUTCD 6E.02.

156.05 Temporary Closures. Road segments may be closed as shown in Table 156-1. The maximum consecutive days of closure shall be followed by a minimum number of consecutive days open to traffic as shown. Maintain traffic control devices during closure period(s). Appropriate barricades and signs will be erected and maintained as shown in the traffic control plan or as otherwise designated.

Prior to closing roads during construction, give written notice to the Contracting Officer at least 10 days in advance.

Table 156-1
Temporary Road Closures

Road Number	From Terminus	To Terminus	Maximum Consecutive Days of Closure	Minimum Consecutive Days Open
<number>	<MP or description>	<MP or description>	<number>	<number>
All Roads	See Work Summaries		10 days per road	N/A

156.06 Acceptance. Public traffic work will be evaluated under Subsection 106.02.

Measurement and Payment

156.07 Do not measure Public Traffic for payment. Payment for contract work is provided indirectly. See Subsection 109.05.

201. — Clearing and Grubbing

201.00_Forest_6_3_2018

Delete Section 201 in its entirety and replace with the following.

Description

201.01 This work consists of clearing and grubbing within the clearing limits designated in the plans.

Material

201.02 Conform to the following Subsection:

Backfill material

704.03

Construction Requirements

201.03 General. Construct erosion control measures according to Section 157. Perform work within designated limits.

Do not damage vegetation designated to remain. If damage occurs, repair or replace the vegetation in an acceptable manner. Where possible, preserve vegetation adjacent to bodies of water.

201.04 Clearing. Within the clearing limits clear trees, brush, and other vegetation as follows:

- (a) Cut trees so they fall within the clearing limits;
- (b) In areas of cut slope rounding, cut stumps flush with or below the finished ground line;
- (c) In areas outside the excavation, embankment, and slope rounding limits, cut stumps to within <12> inches or one-third of the stump diameter of the ground, whichever is higher, measured on the side adjacent to the highest ground. For timber sales, stump heights will meet the requirements of the Timber Sale contract; and
- (d) Trim tree branches that extend over the road surface and shoulders to attain a clear height of 14 feet. Trim tree limbs as near flush with the trunk as practicable.

(e) See the timber sale contract for utilization standards for merchantable timber. Pieces (logs) meet utilization standards when such pieces would have met Utilization Standards if bucking lengths were varied to include such material.

201.05 Grubbing. Grub deep enough to remove stumps, roots, buried logs, moss, turf, or other vegetative matter as follows:

- (a) Grub areas to be excavated, except for cut slope rounding areas;
- (b) Grub embankment areas. Undisturbed stumps less than 24 inches in diameter may be left in place if they protrude less than 6 inches above the original ground and will be covered with more than 48 inches of embankment. Remove all other stumps;
- (c) Grub pits, channel changes, and ditches only to the depth necessary for the excavation;
- (d) Backfill stump holes and other grubbing holes with backfill material to the level of the surrounding ground according to Subsection 209.09. Compact backfill according to Subsection 209.10; and

201.06 Disposal. Dispose of merchantable timber designated for removal according to the provisions of the timber sale contract. Dispose of clearing and grubbing debris according to Subsection 203.05.

201.07 Acceptance. Clearing and grubbing will be evaluated under Subsection 106.02.

Backfilling and compacting of stumps and grubbing holes will be evaluated under Section 209.

Measurement

201.08 Measure the Section 201 pay items listed in the bid schedule according to Subsection 109.02 and the following as applicable:

Do not make deductions from the area computation unless excluded areas are shown on the plans.

Do not measure clearing and grubbing of borrow sources.

Payment

201.09 The accepted quantities will be paid at the contract price per unit of measurement for the Section 201 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

204. — Excavation and Embankment

Delete Section 204 in its entirety and replace with the following.

204.00_Forest_5_11_2018

Description

204.01 This work consists of excavating material and constructing embankments. This work also includes furnishing, hauling, stockpiling, placing, disposing, sloping, shaping, compacting, and finishing earthen and rocky material.

204.02 Definitions.

(a) Excavation. Excavation consists of the following:

(1) Roadway excavation. Material excavated from within the right-of-way or easement areas, except subexcavation covered in Subsection 204.02(a)(2) and structure excavation covered in Sections 208 and 209. Roadway excavation includes all material encountered regardless of its nature or characteristics.

(2) Subexcavation. Material excavated from below subgrade elevation in cut sections or from below the original ground-line in embankment sections. Subexcavation excludes the work required by Subsection 204.05 or 204.06.

(3) Borrow excavation. Material used for embankment construction that is obtained from outside the roadway prism. Borrow excavation includes unclassified borrow, and topping.

(b) Embankment construction. Embankment construction consists of placing and compacting roadway or borrow excavation. This work includes:

- (1)** Preparing foundation for embankment;
- (2)** Constructing roadway embankments;
- (3)** Benching for side-hill embankments;
- (4)** Constructing dikes, ramps, mounds, and berms; and
- (5)** Backfilling subexcavated areas, holes, pits, and other depressions.

(c) Conserved topsoil. Excavated material conserved from the roadway excavation and embankment foundation areas that is suitable for growth of grass, cover crops, or native vegetation.

(d) Waste. Excess and unsuitable roadway excavation and subexcavation that cannot be used.

Material

204.03 Conform to the following Subsections:

Topping

704.05

Construction Requirements

204.04 Preparation for Roadway Excavation and Embankment Construction. Clear the area of vegetation and obstructions according to Sections 201 and 203.

Road pioneering, slash disposal, and grubbing of stumps may proceed concurrently with excavation and embankment. Maintain drainage during pioneering operations.

204.05 Conserved Topsoil. When designated, conserve topsoil from roadway excavation and embankment foundation areas. Stockpile conserved topsoil in low windrows immediately beyond the rounding limits of cut and embankment slopes or in other approved locations. Separate conserved topsoil from other excavated material. When designated, place conserved topsoil on completed slopes according to Section 624.

204.06 Roadway Excavation. Excavate as follows:

(a) Rock cuts. Blast rock according to Section 205. Excavate rock cuts to 6 inches below subgrade within the roadbed limits. Backfill to subgrade with topping or other suitable material. Compact the material according to Subsection 204.11.

(b) Earth cuts. Scarify earth cuts to 6 inches below subgrade within the roadbed limits. Compact the scarified material according to Subsection 204.11.

(c) Pioneer Roads. Conduct excavation and placement operations so material to be treated under Section 201 will not be incorporated into the roadway unless specified in the slash treatment method. Maintain drainage during pioneering operations.

Road pioneering, slash disposal, and grubbing of stumps may proceed concurrently with excavation.

Remove snow and ice in advance of the work and deposit beyond the roadway limits in a manner that will not waste material or generate sediment. Do not incorporate snow and ice into embankments. Place snow or ice in a manner to prevent resource damage.

During pioneering operations prevent undercutting of final excavation slopes.

(d) Drainage Feature. Drainage feature includes construction of all ditches, minor channel changes, drainage dips, catch basins, surface water deflectors, and other minor drainage structures. Compact the material according to Subsection 204.11. Excavate on a uniform grade between control points.

Do not disturb material and vegetation outside the construction limits. Retrieve material deposited outside the construction limits. Dispose of unsuitable or excess excavation material according to Subsection 204.14. Replace shortage of suitable material caused by premature disposal of roadway excavation.

Shape to drain and compact the work area to a uniform cross-section at the end of each day's operations.

204.07 Subexcavation. Excavate material to the required limits. Dispose of unsuitable material according to Subsection 204.14. Take cross-sections according to Section 152. Backfill subexcavated area with suitable material in horizontal layers not exceeding 12 inches in compacted thickness and compact according to Subsection 204.11. Prevent unsuitable material from mixing with suitable backfill material.

204.08 Borrow Excavation. Use suitable roadway excavation in embankment construction. Do not use borrow excavation when it results in excess roadway excavation. Deduct excess borrow excavation from the total borrow excavation quantity.

Obtain borrow source approval according to Subsection 105.02. Develop and restore borrow sources according to Subsections 105.03 and 105.06. Do not excavate beyond the established limits. When applicable, shape the borrow source to permit accurate measurements when excavation is complete.

204.09 Preparing Foundation for Embankment Construction. Prepare foundation for embankment construction as follows:

(a) Embankment over natural ground. Remove topsoil and break up the ground surface to a minimum depth of 6 inches by plowing or scarifying. Compact the ground surface according to Subsection 204.11.

(b) Embankments over an existing asphalt, concrete, or gravel road surface. Scarify gravel roads to a minimum depth of 6 inches. Scarify or pulverize asphalt and concrete roads to 6 inches below the pavement. Reduce particles to a maximum size of 6 inches and produce a uniform material. Compact the surface according to Subsection 204.11.

(c) Embankment across ground not capable of supporting equipment. Dump successive loads of embankment material in a uniformly distributed layer to construct the lower portion of the embankment. Limit the layer thickness to the minimum depth necessary to support the equipment.

(d) Embankment on an existing slope steeper than 1V:3H. Cut horizontal steps in the existing slope to a sufficient width to accommodate placement and compaction operations and equipment. Step the slope as the embankment is placed and compacted in layers. Begin each step at the intersection of the original ground and the vertical cut of the previous step.

204.10 Embankment Construction. Incorporate only suitable roadway excavation material into the embankment. When the supply of suitable roadway excavation is exhausted, furnish unclassified borrow to complete the embankment. Construct embankments as follows:

(a) General. At the end of each day's operations, shape to drain and compact the embankment surface to a uniform cross-section. Eliminate ruts and low spots that could hold water.

During all stages of construction, route and distribute hauling and leveling equipment over the width and length of each layer of material.

Compact embankment side slopes with a tamping foot roller, by walking with a dozer, or by over-building the fill and then removing excess material to the final slope line. For slopes 1V:1 $\frac{3}{4}$ H or steeper, compact the slopes as embankment construction progresses.

Operate spreading equipment and **loaded** hauling equipment over the entire surface of embankment.

(b) Embankment within the roadway prism. Place embankment material in horizontal layers not exceeding 12 inches in compacted thickness. Incorporate oversize boulders or rock fragments into the 12-inch layers by reducing them in size or placing them individually as required below. Compact each layer according to Subsection 204.11 before placing the next layer.

Material composed predominately of boulders or rock fragments too large for 12-inch layers may be placed in layers up to 24 inches thick. Incorporate oversize boulders or rock fragments into the 24-inch layer by reducing them in size or placing individual rock fragments and boulders greater than 24 inches in diameter as follows:

(1) Distribute rock within the embankment to prevent nesting;

(2) Place layers of embankment material around each rock to a depth not greater than that permitted above. Fill voids between rocks; and

(3) Compact each layer according to Subsection 204.11 before placing the next layer.

(c) Embankment outside of roadway prism. When placing embankment outside the staked roadway prism, place material in horizontal layers not exceeding 24 inches in compacted thickness. Compact each layer according to Subsection 204.11.

204.11 Compaction. Compact the embankment using one of the following methods as specified.

(a) Placement Method 1. Reserved.

(b) Placement Method 2. Fill the interstices around rock with earth or other fine material as practical. Operate roller compaction equipment over the full width of each layer until there is no visible evidence of further consolidation or, if when a sheepfoot roller is used, the roller “walks out” of the layer. Make at least three complete passes. Use compression-type rollers at speeds less than 6 feet per second and vibratory rollers at speeds less than 3 feet per second. Ensure rollers meet the following requirements:

(1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum dynamic force of 30,000 pounds impact per vibration, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

(4) Sheepfoot, tamping, or grid rollers capable of exerting a force of 250 pounds per inch of width of roller drum.

(c) Placement Method 3. Fill the interstices around rock with earth or other fine material as practical. Operate hauling and spreading equipment uniformly over the full width of each layer until there is no visible evidence of further consolidation. Make at least three complete passes.

(d) Placement Method 4. Fill the interstices around rock with earth or other fine material as practical. Operate hauling and spreading equipment uniformly over the full width of each layer.

(e) Placement Method 5. Compact the complete surface with a bucket of an excavator larger than 39,000 pounds Gross Vehicle Weight using a minimum of three blows. Overlap compaction by ½ width of bucket.

(f) Placement Method 6. Compact using an approved mechanical tamper for a minimum of three complete passes.

When compacting with rollers or hauling and spreading equipment is not practical, use approved mechanical tampers for a minimum of three complete passes.

204.12 Drainage Features. Slope, grade, and shape all drainage features. Remove projecting roots, stumps, rock, or similar matter. Maintain all drainage features in an open condition and without sticks, and other debris.

Form furrow ditches by plowing or using other acceptable methods to produce a continuous furrow. Place excavated material on the downhill side so the bottom of the ditch is approximately 18 inches below the crest of the loose material. Clean the ditch using a hand shovel or other suitable method. Shape to provide drainage without overflow.

204.13 Sloping, Shaping, and Finishing. Complete subgrade, slopes, drainage features, culverts, riprap, and other underground minor structures before placing aggregate courses. Slope, shape, and finish to the designated tolerance class as defined in Table 204-2 as follows:

(a) Sloping. Leave earth slopes with uniform roughened surfaces, except as described in Subsection 204.13(b), with no noticeable break as viewed from the road. Except in solid rock, round tops and bottoms of slopes including the slopes of drainage ditches. Round material overlaying solid rock to the extent practical. Scale rock slopes. Slope rounding is not required on tolerance class D through M roads.

If a slide or slipout occurs on a cut or embankment slope, remove or replace the material and repair or restore damage to the work. Bench or key the slope to stabilize the slide. Reshape the cut or embankment slope to an acceptable condition.

(b) Stepped slopes. Where required, construct steps on slopes of 1½V:1H to 1V:2H. Construct the steps approximately 18 inches high. Blend the steps into natural ground at the end of the cut. If the slope contains non-rippable rock outcrops, blend steps into the rock. Remove loose material found in transitional area. Except for removing large rocks that may fall, scaling stepped slopes is not required.

(c) Shaping. Shape the subgrade to a smooth surface and to the cross-section required. Shape slopes to gradually transition into slope adjustments without noticeable breaks. At the ends of cuts and at intersections of cuts and embankments, adjust slopes in the horizontal and vertical planes to blend into each other or into the natural ground.

(d) Finishing. Ensure that the subgrade is visibly moist during shaping and dressing; smooth and uniform, and shaped to conform to the typical sections. Remove material larger than 6 inches from the top 6 inches of the roadbed. Remove unsuitable material from the roadbed, and replace it with suitable material. Scarify to 6 inches below the bottom of low sections, holes, cracks, or depressions and bring back to grade with suitable material.

Maintain proper ditch drainage.

204.14 Disposal of Unsuitable or Excess Material. Dispose of unsuitable or excess material at designated sites or according to Subsection 203.05(a)

When there is a pay item for waste, shape and compact the waste material in its final location. Do not mix clearing or other material not subject to payment with the waste material.

204.15 Acceptance. See Table 204-1 for sampling, testing, and acceptance requirements.

Material for embankment and conserved topsoil will be evaluated under Subsections 106.02 and 106.04.

Excavation and embankment construction will be evaluated under Subsections 106.02 and 106.04.

Subexcavation will be evaluated under Subsections 106.02 and 106.04.

Measurement

204.16 Measure the Section 204 pay items listed in the bid schedule according to Subsection 109.02 and the following as applicable:

(a) Roadway excavation. Measure roadway excavation in its original position as follows:

(1) Include the following volumes in roadway excavation:

- (a)* Roadway prism excavation;
- (b)* Rock material excavated and removed from below subgrade in cut sections;
- (c)* Unsuitable material below subgrade and unsuitable material beneath embankment areas when a pay item for subexcavation is not listed in the bid schedule;
- (d)* Ditches, except furrow ditches measured under a separate pay item;
- (e)* Conserved topsoil;
- (f)* Borrow material used in the work when a pay item for borrow is not listed in the bid schedule;
- (g)* Loose scattered rocks removed and placed as required within the roadway;
- (h)* Conserved material taken from pre-existing stockpiles and used in Section 204 work, except topsoil measured under 624; and
- (i)* Slide and slipout material not attributable to the Contractor's method of operation.

(2) Do not include the following in roadway excavation:

- (a)* Overburden and other spoil material from borrow sources;
- (b)* Overbreakage from the backslope in rock excavation;
- (c)* Water or other liquid material;
- (d)* Material used for purposes other than required;
- (e)* Roadbed material scarified in place and not removed;
- (f)* Material excavated when stepping cut slopes;
- (g)* Material excavated when rounding cut slopes;
- (h)* Preparing foundations for embankment construction;
- (i)* Material excavated when benching for embankments;
- (j)* Slide or slipout material attributable to the Contractor's method of operation;
- (k)* Conserved material taken from stockpiles constructed at the option of the Contractor;
- (l)* Material excavated outside the established slope limits; and
- (m)* Road pioneering for the convenience of the Contractor.

(3) When both roadway excavation and embankment construction pay items are listed in the bid schedule, measure roadway excavation only for the following:

(a) Unsuitable material below subgrade in cuts and unsuitable material beneath embankment areas when a pay item for subexcavation is not listed in the bid schedule;

(b) Slide and slipout material not attributable to the Contractor's method of operations; and

(c) Drainage ditches, channel changes, and diversion ditches.

(b) Unclassified borrow, and topping. When measuring by the cubic yard measure in its original position. If borrow excavation is measured by the cubic yard in-place, take initial cross-sections of the ground surface after stripping overburden. Upon completion of excavation and after the borrow source waste material is returned to the source, retake cross-sections before replacing the overburden. Do not measure borrow excavation until suitable roadway excavation is depleted.

(c) Embankment construction. Measure embankment construction in its final position. Do not make deductions from the embankment construction quantity for the volume of minor structures.

(1) Include the following volumes in embankment construction:

(a) Roadway embankments;

(b) Material used to backfill subexcavated areas, holes, pits, and other depressions;

(c) Material used to restore obliterated roadbeds to original contours; and

(d) Material used for dikes, ramps, mounds, and berms.

(2) Do not include the following in embankment construction:

(a) Preparing foundations for embankment construction;

(b) Adjustments for subsidence or settlement of the embankment or of the foundation on which the embankment is placed; and

(c) Material used to round fill slopes.

(d) Rounding cut slopes. If a pay item for slope rounding is included in the bid schedule measure rounding cut slopes horizontally along the centerline of the roadway. If a pay item is not included for slope rounding is not included in the bid schedule payment will be considered indirect to roadway excavation.

(e) Waste. Measure waste by the cubic yard in its final position. Take initial cross-sections of the ground surface after stripping over-burden. Upon completion of the waste placement, retake cross-sections before replacing overburden.

(f) Slope scaling. Measure slope scaling by the cubic yard in the hauling vehicle.

(g) Subexcavation. Measure subexcavation by the cubic yard in its original position.

(h) Drainage features. Measurement includes all excavation, embankment, shaping, and grading necessary for a completed drainage feature.

Payment

204.17 The accepted quantities will be paid at the contract price per unit of measurement for the Section 204 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Table 204-1
Sampling, Testing, and Acceptance Requirements

Material or Product (Subsection)	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Source								
Topping (704.05)	Measured and tested for conformance (106.04 & 105)	Classification ⁽¹⁾	–	AASHTO M 145	1 per soil type and source of material	Processed material	Yes	Before using in work
Unclassified borrow (704.06)	"	"	–	"	"	"	"	"
Production								
Topping (704.05) and (204.11(a))	Measured and tested for conformance (106.04)	Moisture-density	–	T 99, Method C ⁽²⁾	1 per soil type, but not less than 1 per each 13,000 yd ³ (10,000 m ³)	Processed material	Yes	Before using in work
		Density	–	AASHTO T 310 or other approved procedures	1 per 3500 yd ² (3000 m ²), but not less than 3 per layer	In-place	No	Before placement of next layer
Unclassified borrow (704.06) and (204.11(a))	"	Moisture-density	–	T 99, Method C ⁽²⁾	1 per soil type, but not less than 1 per each 13,000 yd ³ (10,000 m ³)	Processed material	Yes	Before using in work

[illegible]

Table 204-1
Sampling, Testing, and Acceptance Requirements

Material or Product (Subsection)	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Roadbed (204.13)	Measured and tested for conformance (106.04)	Final line & grade	—	Field measured	Determined by the CO	Determined by the CO	No	Before placement of next layer

(1) Not required when using Government-provided source.

(2) Minimum 5 points per proctor.

Table 204-2
Construction Tolerances

Tolerance Class (a)													
Location Description	A	B	C	D	E	F	G	H	I	J	K	L	M
Roadbed width (ft)	+0.5	+0.5	+1.0	+1.0	+1.0	+1.0	+1.5	+1.0	+2.0	+2.0	+2.0	+2.0	+2.0
Subgrade elevation (ft)	+0.1	+0.2	+0.2	+0.5	+0.5	+1.0	+1.0	+1.5	+2.0	+3.0	+2.0	+3.0	(c)
Centerline alignment (ft)	+0.2	+0.2	+0.5	+0.5	+1.0	+1.0	+1.5	+1.5	+2.0	+3.0	+3.0	+5.0	(c)
Slopes, excavation, and embankment (% slope ^(b))	+3	+5	+5	+5	+5	+5	+10	+10	+10	+10	+20	+20	+20

(a) Maximum allowable deviation from construction stakes and drawings.

(b) Maximum allowable deviation from staked slope measured from slope stakes or hinge points.

(c) Unless otherwise shown the centerline alignment and subgrade elevation, as built, have no horizontal curves with a radius of less than 80 feet, and no vertical curves with a curve length of less than 80 feet when the algebraic difference in the grade change is less than 10 percent, or a curve length of less than 100 feet when the algebraic difference of the grade change is greater than or equal to 10 percent. The centerline grade is not to exceed 20 percent in 100 feet of length.

212 - Linear Grading

212.00_10_us_02_13_2008

Delete the entire specification and replace it with the following:

Description

212.01 This work consists of reference staking drainage structures and control points, marking clearing limits outside units, clearing and grubbing, slash treatment, excavation and embankment, including haul and end haul, erosion control, material source development, turf establishment, to construct roadways and associated features within the specified alignment and grade tolerances.

Stake according to sections 152 and FSS 152.

Develop material sources according to section(s) 105, and the approved plan of operations for Pit Development.

Construction Requirements

212.02 Clearing & Disposal. Protect construction stakes and construction control markers. Remove or treat all trees, snags, downed timber, brush, and stumps within the clearing limits. Do not damage vegetation not designated for treatment.

Immediately remove slash deposited in stream courses.

Fell all dead trees that are outside the clearing limits and that lean toward the road and are tall enough to reach the roadbed.

Leave stumps outside grubbing limits with heights less than 12 inches or one-third of the stump diameter; whichever is greater, measured on the side adjacent to the highest ground. Leave felled trees outside the clearing limits in place, and treat them no further unless otherwise designated.

Dispose of tops, limbs, logs, and stumps in accordance with section 203.05

Dispose of merchantable timber designated for removal according to the provisions of the timber sale contract.

Unless otherwise agreed to in writing, all merchantable timber cleared under the requirements of this section shall be removed prior to final acceptance.

Merchantable timber on private land within the clearing limits belongs to the landowner. Deck merchantable timber according to 201.04(f) on the landowner's property adjacent to the road in approved locations.

All other Construction slash will be disposed of according to section 203.05

Unmerchantable Timber and Large Construction Slash

Refer to section FSS 203.05 for appropriate treatment method.

212.03 Pioneering. Do not undercut the final back slope during pioneering operations. Deposit material inside the roadbed limits or designated locations. Do not restrict drainage.

212.04 Grubbing. Within the **roadway** limits remove stumps with less than **24** inches of cover.

212.05 Roadway Excavation & Embankment. Construct the roadbeds according to the applicable requirements of Section 204 except as modified herein. Construct the roadway to the required template. Protect backslopes from being undercut. Deposit material inside the roadbed limits or designated locations. Do not restrict drainage.

Blast rock according to Section 205 Rock Blasting.

Areas requiring end haul and end haul disposal areas will be identified on ground and approved in advance.

Place rocks that are too large to be incorporated in the embankment outside the traveled way on the downhill side so that they will not roll, obstruct drainage, or hinder roadbed use and maintenance. Maximum particle cannot exceed half the depth of embankment layer.

Place material by side casting and end dumping to a minimum depth needed for operation of spreading and hauling equipment and minimum depths as shown on typical cross- sections. Minimum embankment depth in areas where prepared ground surfaces are solid rock is 12 inches. Construct solid embankments with adequate compaction by working smaller rock and fines in with larger rocks to fill the voids.

Produce and use borrow material from **approved sources**, and remove and treat unsuitable or excess material.

Operate loaded hauling and spreading equipment uniformly over full width of each layer.

Leave slopes that are to be seeded in a roughened condition.

Use a crawler tractor with a dozer blade to shape and finish the roadbed. Provide for drainage of surface water, unless otherwise designated. Do not permit individual rocks in the roadbed to protrude more than 4 inches above the subgrade. A motor grader finish is not required.

Do not encroach on stream channels, wetlands, or extend beyond right-of-way or easement limits. Do not make alignment or profile grade adjustments that adversely affect drainage. Construct the roadbed within the following grading tolerances:

(a) Alignment (centerline). Alignment may be shifted a maximum of 20 feet slope distance left or right of the planned centerline. Proposed realignments greater than 20' slope distance must be approved in writing prior to start of construction. Do not construct curves with radii less than 50 feet. Compound curves are permitted. Traveled way tolerance is (+/-) 2 feet unless otherwise designated.

(b) Profile grade. Profile grade may be shifted a maximum of 5 feet up or down from the plan elevation provided the new grade tangent does not vary more than 2 percent from the plan grade tangent. Connect revised forward and back grade tangents with a uniform vertical curve consistent with the criteria.

212.06 Drainage. Install culverts and other drainage structures according to Section 602, and Section 209.

212.07 Erosion Control. Install erosion control measures and seeding according to the drawings and Sections 157 and 625.

212.08 Acceptance. Linear grading will be evaluated under Subsections 106.02 and 106.04.

Clearing and slash and timber treatment will be evaluated under Sections 201 and 203.

Measurement

212.09 Measure the Section 212 items listed in the bid schedule according to Subsection 109.02 and the following.

Do not measure changes in the clearing and grubbing quantity caused by alignment adjustments under Subsection 212.04.

Payment

212.10 The accepted quantities, measured as provided in Subsection 109.02 and above, will be paid at the contract price per unit of measurement for the Section 212 pay item listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

302 - Minor Crushed Aggregate

302.04_National_7_18_2017

Add the following to Subsection 302.04 and 302.04(a)

302.04 Placing Crushed Aggregate.

Written approval of the surface is required before placing aggregate.

(a) Roadway aggregate.

For pit run or grid-rolled material, furnish material smaller than the maximum size, no gradation will be required otherwise. After processing on the road, remove all oversize material from the road and dispose as directed by the CO.

302.04_National_7_10_2017

Delete Subsection 302.05(a) and replace with the following:

302.05 Compacting and Finishing Crushed Aggregate

(a) Roadway aggregate. Compact using the methods below, specified in the Schedule of Items.

(1) Method 1. Compact the aggregate by operating compaction equipment over the total width until visible deformation ceases. A minimum of three complete roller passes shall be made at a moisture content suitable for compaction.

(2) Method 2. Operate equipment over the full width of spread aggregate.

303 - Road Reconditioning

303.05_Regional_5_31_2018

Delete Subsection 303.05 and replace with the following:

303.05 Roadbed Reconditioning.

Remove organic, deleterious, and material larger than 6 inches brought to the surface during reconditioning. Scarify potholes, ruts, and areas shown in the plans to a 6-inch depth or the bottom of the pothole, whichever is less. Dispose of waste at designated sites or according to Subsection 204.14. Repair soft and unstable areas according to Subsection 204.07. Remove irregularities and shape to a uniform surface. Perform the work, including mixing or spreading, when the moisture content is suitable for the specified compaction method. Compact the surface according to Subsection 204.11. Shape the surface according to 204.13(c).

Delete Subsection 303.06 and replace with the following:

303.06 Aggregate Surface Reconditioning.

Repair soft and unstable areas to the full aggregate surface depth and according to Subsection 204.07. Scarify potholes, ruts, and areas shown in the plans to a 6-inch depth or the bottom of the pothole, whichever is less. Remove irregularities and shape to a uniform surface. Perform the work, including mixing or spreading, when the moisture content is suitable for the specified compaction method. Compact the surface according to Subsection 204.11. Shape the surface according to 204.13(c).

303.07_National_7_18_2017

Add the following to Subsection 303.07:

303.07 Roadway Reconditioning.

Remove cattleguard decks. Clean the deck and the area beneath the cattleguard of soil and other material to the bottom of the original foundation over the entire width of the installation. Dispose of waste at designated sites or according to Subsection 204.14. Reinstall the cattleguard deck.

703 - Aggregate

703.05_National_6_7_2018

Delete 703.05 and replace with the following:

703.05 Subbase, Base, Surface Course, and Screened Aggregate.

(a) Subbase or base aggregate. Furnish hard, durable particles or fragments of crushed stone, crushed slag, or crushed gravel conforming the following:

(1) Gradation	Table 703-2
(2) Liquid limit, AASHTO T 89	25 max.
(3) Plastic limit, AASHTO T 90	Nonplastic
(4) Los Angeles abrasion, AASHTO T 96	40% max.
(5) Sodium sulfate soundness loss (5 cycles), AASHTO T 104	12% max.
(6) Durability index (coarse), AASHTO T 210	35 min.
(7) Durability index (fine), AASHTO T 210	35 min.
(8) Fractured faces, ASTM D 5821	50% min.
(9) Free from organic matter and lumps or balls of clay	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary. Fine aggregate, material passing the No. 4 sieve, shall consist of natural or crushed sand and fine mineral particles.

(b) Surface course aggregate. Furnish hard, durable particles or fragments of crushed stone, crushed slag, or crushed gravel conforming the following:

(1) Gradation	Table 703-3
(2) Liquid limit, AASHTO T 89	35 max.
(3) Plastic Index, AASHTO T 90	
a) If the percent passing the No. 200 sieve is less than 12%	2 to 9
b) If the percent passing the No. 200 sieve is greater than 12%	Less than 2
(4) Los Angeles abrasion, AASHTO T 96	40% max.
(5) Sodium sulfate soundness loss (5 cycles), AASHTO T 104	12% max.
(6) Durability index (coarse), AASHTO T 210	35 min.
(7) Durability index (fine), AASHTO T 210	35 min.
(8) Fractured faces, ASTM D 5821	75% min.
(9) Free from organic matter and lumps or balls of clay	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Do not furnish material that contains asbestos fibers.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary. Fine aggregate, material passing the No. 4 sieve, shall consist of natural or crushed sand and fine mineral particles.

(c) Screened aggregate – Furnish hard, durable particles or fragments of stone, slag, or gravel conforming the following:

(1) Gradation	Table 703-16
(2) Plastic Index, AASHTO T 90	Less than 9
(3) Los Angeles abrasion, AASHTO T 96	55% max.
(4) Free from organic matter and lumps or balls of clay.	

Do not use material that breaks up when alternately frozen and thawed or wetted and dried.

Obtain the aggregate gradation by crushing, screening, and blending processes as necessary.

Delete Table 703-2 and replace with the following:

**Table 703-2
Target Value Ranges for Subbase and Base Gradation**

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)					
	Grading Designation					
	A (Subbase)	B (Subbase)	C (Base)	D (Base)	E (Base)	
2½ inch	100					
2 inch	97 – 100	100	100			
1½ inch		97 – 100				
1 inch	65 – 79 (6)		80 – 100 (6)	100		
¾ inch			64 – 94 (6)	86 – 100 (6)	100	
1/2 inch	45 – 59 (7)					
3/8 inch			40 – 69 (6)	51 – 82 (6)	62 – 90 (6)	
No. 4	28 – 42 (6)	40 – 60 (8)	31 – 54 (6)	36 – 64 (6)	36 – 74 (6)	
No. 40	9 – 17 (4)			12 – 26 (4)	12 – 26 (4)	
No. 200	4.0 – 8.0 (3)	4.0 – 12.0 (4)	4.0 – 7.0 (3)	4.0 – 7.0 (3)	4.0 – 7.0 (3)	

() The value in the parentheses is the allowable deviation (\pm) from the target values..

Delete Table 703-3 and replace with the following:

**Table 703-3
Target Value Ranges for Surface Gradation**

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)					
	Grading Designation					
	F	G	H	S	T	U
1 1/2 inch	100			100		
1 inch	97-100	100		72 – 92 (6)	100	
3/4 inch	76-89 (6)	97 - 100	97 - 100			100
1/2 inch					71 – 91 (6)	
3/8 inch	56-68 (6)	70 – 80 (6)	80 – 92 (6)	51 – 71 (6)		71 – 90 (6)
No. 4	43-53 (7)	51 – 63 (7)	58 – 70 (7)	36 – 53 (7)	43 – 60 (7)	50 – 68 (7)
No. 8				26 – 40 (6)	30 – 46 (6)	34 – 51 (6)
No. 16	23-32 (6)	28 – 39 (6)	28 – 40 (6)			
No. 40	15-23 (5)	19 – 27 (5)	16 – 26 (5)	14 – 25 (5)	16 – 28 (5)	19 – 30 (5)
No. 200	10.0-16.0 (4)	10.0 – 16.0 (4)	9.0 – 14.0 (4)	8.0 – 15.0 (4)	8.0 – 15.0 (4)	8.0 – 15.0 (4)

() The value in the parentheses is the allowable deviation (\pm) from the target values.
If the plasticity index (PI) is greater than 0, the TV range for the No. 200 sieve size is 8-12 (4).

Add Table 703-13:

Table 703-13
Gradation Requirements for Screened Aggregate

Sieve Size	Percent by Mass Passing Designated Sieve (AASHTO T 27 and T 11)						
	Grading Designation						
	L	M	N	O	P	Q	R
6 inch	100	100					
4 inch			100	100			
3 inch					100	100	
2 inch							100
No. 4		15-45		15-45		15-45	