

**FINAL**

# **2007/2008 WORK PLAN**

## **NEW WORLD MINING DISTRICT RESPONSE AND RESTORATION PROJECT**



United States Department of Agriculture  
Forest Service  
Gallatin National Forest



**2007/2008 WORK PLAN  
NEW WORLD MINING DISTRICT  
RESPONSE AND RESTORATION PROJECT**

*Prepared for:*

**USDA Forest Service  
Gallatin National Forest  
Bozeman, Montana**

*Prepared by:*

Tetra Tech  
303 Irene Street  
Helena, Montana 59601

**January 2008**



## TABLE OF CONTENTS

	<u>Page</u>
<b>1.0 INTRODUCTION</b> .....	<b>1</b>
1.1 PROJECT BACKGROUND.....	1
1.2 SITE LOCATION AND DESCRIPTION.....	6
1.3 PURPOSE AND OBJECTIVES.....	6
<b>2.0 SCOPE OF WORK</b> .....	<b>9</b>
2.1 COMMUNITY RELATIONS.....	9
2.2 MAINTAIN PROJECT WEBSITE AND DATABASE.....	10
2.3 SURFACE WATER QUALITY MONITORING.....	10
2.4 GROUNDWATER MONITORING.....	18
2.5 MCLAREN PIT AREA REVEGETATION.....	26
2.6 GLENGARRY CHANNEL RECONSTRUCTION.....	26
2.7 ROAD OBLITERATION AND TRAIL CONSTRUCTION.....	26
2.8 RECLAMATION MONITORING.....	26
2.9 PREPARE SITE-WIDE LONG-TERM OPERATIONS AND MAINTENANCE PLAN.....	29
2.10 PREPARE 2008/2009 WORK PLAN.....	29
<b>3.0 PROJECT SCHEDULE</b> .....	<b>29</b>
<b>4.0 REPORTS</b> .....	<b>31</b>
<b>5.0 REFERENCES</b> .....	<b>33</b>

## LIST OF FIGURES

### Figure

1 Project Vicinity Map.....	3
2 2007 Surface Water Monitoring Stations.....	13
3 2007 Adit Discharge Monitoring Stations.....	14
4 2007 Groundwater Monitoring Stations.....	23
5 McLaren Pit Area Monitoring Sites.....	24
6 McLaren Pit Area Revegetation Maintenance Sites.....	27
7 Road Restoration Closure Locations.....	28
8 Project Schedule.....	30

## LIST OF TABLES

### Table

1 Community Relations Activities.....	9
2 2007 Surface Water Sample Sites.....	12
3 Surface Water Field Parameters.....	15
4 Surface Water Sampling Requirements.....	15
5 Surface Water Analytical Requirements.....	16
6 Supplemental Surface Water Sample Site Monitoring Objectives.....	17
7 Adit Discharge Sample Sites.....	18
8 Fisher Creek and Repository Well Monitoring.....	19
9 McLaren Pit Area Monitoring Wells Scheduled for Sampling in 2007.....	20
10 Groundwater Field Parameters.....	21
11 Groundwater Sampling Requirements.....	21

## TABLE OF CONTENTS (continued)

<b>Table (continued)</b>		<u>Page</u>
12	Groundwater Analytical Requirements.....	25
13	Reclamation Monitoring Sites.....	29
14	Project Document List .....	31

## I.0 INTRODUCTION

This document provides descriptions of work tasks to be completed during 2007/2008 in conjunction with response and restoration activities for the New World Mining District Response and Restoration Project in Park County, Montana (**Figure 1**). The 2007/2008 Work Plan complements the Overall Project Work Plan (Maxim, 1999a) by providing a description of specific work elements that will be completed in 2007/2008. This work plan initiates the project cycle for the eighth year of the project. Project activities conducted by the U.S. Department of Agriculture (USDA) Forest Service began in 1999. Those activities are described in the 1999, 2000, 2001, 2002/2003, 2003/2004, 2004/2005, 2005/2006, and 2006/2007 Work Plans (Maxim, 1999b; 2000; 2001a; 2002a; 2003a; 2004a; 2005a; 2006a).

This year's work plan for the project crosses over into 2008 and is designated the 2007/2008 Work Plan. This period of time is covered in this document because it is more useful for the planning period to begin in the spring to accommodate field and construction activities that must be completed during a relatively short season beginning in April and ending in early October.

A general description of the site, project objectives, and project organization are provided in this introductory section. Following this introductory section is a detailed description of the work tasks that will be completed during 2007/2008, a project schedule, and project deliverables. For more detailed descriptions of the overall project, the reader can refer to the Overall Project Work Plan (Maxim, 1999a) and/or annual project summary documents produced in 2001 through 2006 (Maxim, 2001b; 2002b; 2003b, 2004b; 2005b; 2006b). These documents are available on the project website at,

<http://www.fs.fed.us/r1/gallatin>

and at three project information repositories located at the Gallatin National Forest Supervisor's Office in Bozeman, Montana; the Gardiner Ranger District Office in Gardiner, Montana; and at the Cooke City Chamber of Commerce office in Cooke City, Montana. The reader is encouraged to review these documents to gain a better understanding of the overall project.

### I.1 PROJECT BACKGROUND

On August 12, 1996, the United States signed a Settlement Agreement (Agreement) with Crown Butte Mines, Inc. (CBMI) to purchase CBMI's interest in their New World Mining District (District) holdings. This transfer of property to the U.S. government effectively ended CBMI's proposed mine development plans and provided \$22.5 million to cleanup historic mining impacts in the District. In June 1998, all interested parties and CBMI signed a Consent Decree (Decree). The Decree, approved by the United States District Court, finalized the terms of the Agreement and made available the funds that are being used for mine cleanup. Monies available for cleanup will be spent first on District Property, which, as defined in the Decree, includes all property or interests in property that CBMI relinquished to the United States (**Figure 1**). As funds are available after District Property is cleaned up to the satisfaction of the United States, other mining disturbances in the District may be addressed.

The USDA Forest Service, as the lead agency responsible for implementing the cleanup, has assembled a management team and has published objectives to guide reclamation and restoration of the historic mining impacts in the District. Under their Superfund authority, the USDA Forest Service will execute the response and restoration project by following guidance provided by the Environmental Protection Agency (EPA) for non-time-critical removal actions (EPA, 1993). Non-time-critical removal actions are defined by the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) and

the National Oil and Hazardous Substances Pollution Contingency Plan (NCP) as actions that are implemented by the lead agency to respond to “the cleanup or removal of released hazardous substances from the environment ... as may be necessary to prevent, minimize, or mitigate damage to the public health or welfare or to the environment...” (EPA, 1993).


In 1995, EPA began a site investigation after initial announcement of the property transfer from CBMI. The EPA investigation involved installation of monitoring wells, surface water sampling, groundwater monitoring, and completion of a groundwater tracer study. In October 1998, the USDA Forest Service assisted CBMI in completing and submitting a Support Document and Implementation Plan to support the CBMI petition for temporary modification of water quality standards. Under the Decree and Agreement, CBMI is required to submit petitions regarding temporary standards if requested by the USDA Forest Service. The Support Document and Implementation Plan (Stanley and Maxim, 1998) was submitted to the State of Montana Board of Environmental Review (Board) on January 22, 1999. The petition for the adoption of temporary standards for Fisher Creek, Daisy Creek, and a portion of the upper Stillwater River was accepted by the Board and noticed for public hearing. The proposed rule was modified to reflect public comment and the temporary water quality standards were approved and adopted by the Board on June 4, 1999. The goal of the temporary standards is to allow the project to proceed so that water quality in Fisher Creek, Daisy Creek, and the Stillwater River improves to the point where these streams meet uses for waters classified B-I under classification standards established by the State of Montana.

The temporary standards are subject to change as improvements in water quality are realized. They are reviewed every three years to determine if changes are desirable, and the first review was required in 2002. The Board held a hearing on July 26, 2002, to review the long-term water quality data collected since the standards became effective in June 1999, and compared project progress with that presented in the implementation plan (Maxim, 2002c). As a result of this review, the Board took no action to modify the temporary standards as originally defined in June 1999. A second tri-annual review hearing on temporary water quality standards was held by the Board on June 3, 2005, with the same result.

In March 1999, the USDA Forest Service initiated the planning process for the project. Planning documents were in place in June 1999, and work began on the project with the monitoring of surface water and groundwater quality at selected monitoring points. Activities that have been conducted to date include the following:

- Establishing a database management system for the project.
- Cataloging existing information available for the site.
- Conducting public meetings and annual technical meetings to distribute relevant project information to interested parties.
- Completing a technical evaluation of existing information and data.
- Developing a suitable base map to support engineering design.
- Conducting annual surface water and groundwater monitoring at select locations in the District.
- Obtaining data to fill identified data gaps for proposed response actions including installing monitoring wells, collecting environmental samples, and collecting other environmental data.
- Identifying unrecorded mine waste dumps, adits, and boreholes, and developing a database of site characteristics.

Data Source: Ownership, unimproved roads, and mine waste source areas from Gallatin National Forest Interagency Spatial Analysis Center, (Fall 2002 and Winter 2003).  
 Cartographic feature files obtained from Montana State Library, Natural Resource Information System.

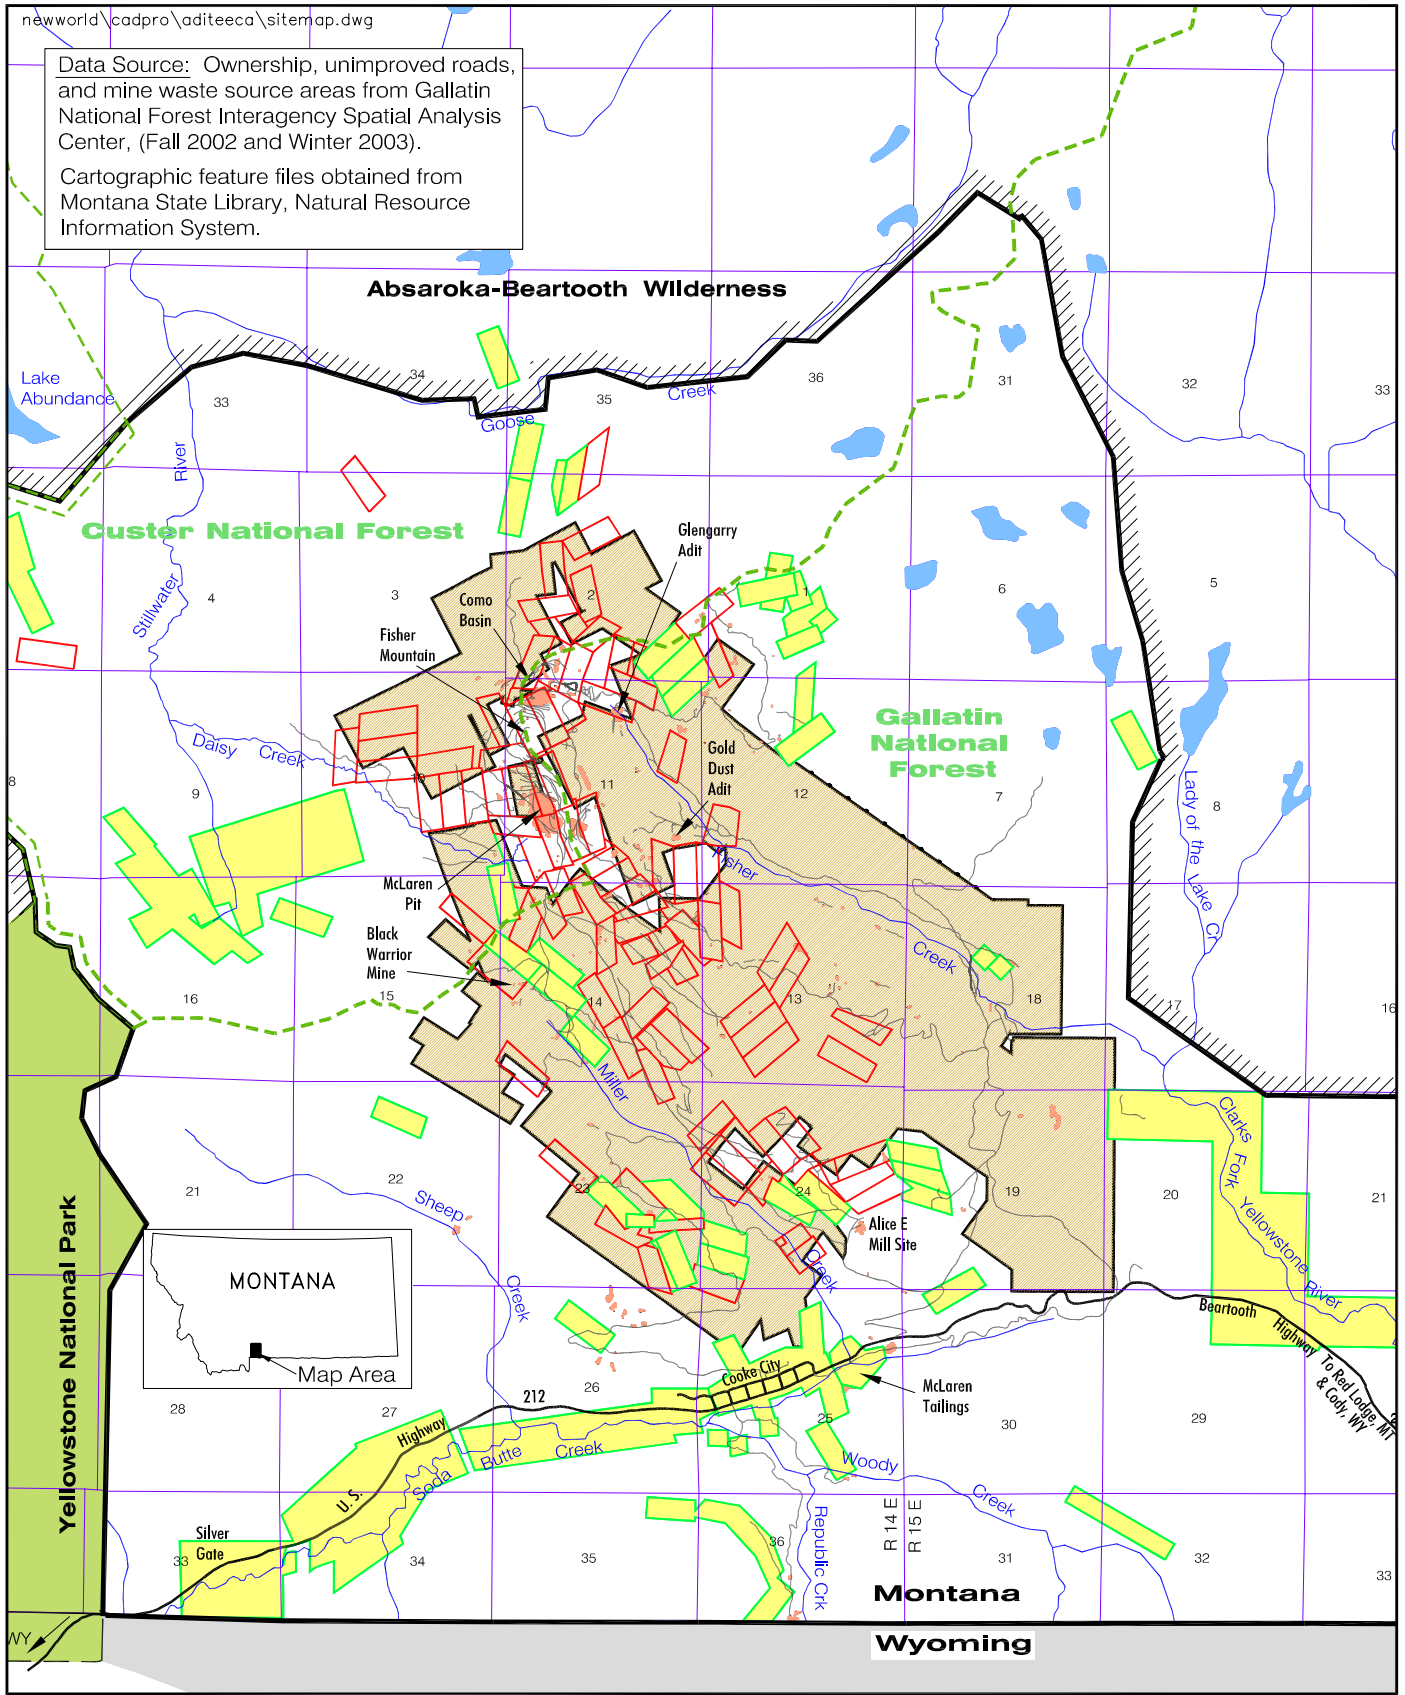

- District Property Boundary
- District Boundary
- ~ Unimproved Road
- - - National Forest Boundary
- /// Wilderness Boundary
- Mine Waste Source Area
- District Property (Patented Claims)
- District Property (Unpatented Claims)
- Private Property



6561306.110

Project Vicinity Map  
 New World Mining District  
 Response and Restoration Project  
 Cooke City Area, Montana

FIGURE 1

Figure I - back page

- Improving portions of the Daisy Pass and Lulu Pass roads to accommodate construction traffic.
- Improving a previously constructed surface water diversion around the Como Shaft.
- Completing a repository siting evaluation report and collecting hydrogeologic data on two prospective repository sites.
- Completing a surface water tracer study by the U.S. Geological Survey on Daisy Creek and Miller Creek to determine surface water inputs of metal contaminants.
- Ranking mine waste sources according to a modified Hazard Ranking System to aid in the prioritization of sites slated for clean up.
- Identifying unrecorded cultural features.
- Reopening the Glengarry Adit and Como Raise to more fully characterize underground sources of water within the mine.
- Evaluating water quality treatment alternatives for acid mine discharges.
- Preparing a Selective Source Response Action Engineering Evaluation/Cost Analysis (EE/CA) for potential response alternatives (Maxim, 2001c).
- Removing approximately 25,000 cubic meters (32,700 cubic yards) of mine waste rock and mill tailings (nine percent of the total District waste) from seven mine waste areas, disposing of these wastes in an engineered repository, and revegetating about 1.9 hectares (4.6 acres) of the former waste areas for the Selective Source Response Action.
- Preparing a McLaren Pit Response Action EE/CA (Maxim, 2001d).
- Consolidating and capping waste rock dumps from the Daisy Creek headwaters into the McLaren Pit. These waste source areas account for about 67% of the District's total waste rock volume on District Property. Construction activities were initiated in 2002 with the consolidation of the wastes, and concluded with capping the consolidated wastes with an impermeable cover in 2003.
- Preparing a report for the Board of Environmental Review with respect to their review of the temporary water quality standards.
- Preparing a Como Basin/Glengarry Adit/Fisher Creek Response Action EE/CA (Maxim, 2002d).
- Closing the Glengarry Adit to eliminate contaminated outflows.
- Reopening and evaluating the McLaren Adit, and grouting an exploration boring that intersected the adit tunnel.
- Preparing the Miller Creek Response Action EE/CA (Maxim, 2004c).
- Monitoring reclaimed and revegetated sites in the District.
- Completing construction of surface controls at select sites in the Miller Creek and Fisher Creek drainages.
- Consolidating and capping mineralized disturbed soils in the Como Basin.
- Removing approximately 23,000 cubic meters (30,000 cubic yards) of mine waste rock from four waste rock dumps located in the Fisher and Miller Creek drainages and disposing of these wastes in the New World Waste Repository.
- Characterizing the distribution of sediment in Fisher Creek and Daisy Creek.

- Preparing an Adit Discharge EE/CA to evaluate alternatives that could reduce the flow or improve water quality discharging from historic adits in the District.
- Plugging and abandoning 53 former monitoring wells.
- Studying ferricrete deposition in Fisher Creek and Daisy Creek.
- Studying the effects of reclamation work on grizzly bear activity in the District.
- Studying the occurrence of metal contaminated sediment in the Stillwater wetland.
- Preparing documentation to list the District on the National Register of Historic Places.
- Preparing Project Summary documents to succinctly describe project activities over the years.

## **I.2 SITE LOCATION AND DESCRIPTION**

The District falls within the Gallatin and Custer National Forests and abuts Yellowstone National Park's northeast corner. The Absaroka-Beartooth Wilderness Area bounds the District to the north and east, with the Montana-Wyoming state line forming the southern boundary of the District. The District lies entirely within Park County, Montana (**Figure I**).

The communities of Cooke City and Silver Gate, Montana, are the only population centers near the District. The neighboring communities of Mammoth, Wyoming, and Gardiner, Montana, are located about 80 kilometers (50 miles) to the west. Red Lodge, Montana, is located about 105 kilometers (65 miles) to the northeast via the Beartooth Highway, and Cody, Wyoming, is located 95 kilometers (60 miles) to the southeast.

The District is located at an elevation that ranges from 2,400 meters (7,900 feet) to over 3,170 meters (10,400 feet) above sea level. The site is snow-covered for much of the year and only one route of travel is open on a year-round basis -- the highway between Mammoth and Cooke City. The Sunlight Basin road accesses the District from northwestern Wyoming during the spring, summer, and fall but only allows access to within a few miles of the District in winter. The Beartooth Highway allows access to the District from the east but is closed during winter.

The District covers an area of about 10,360 hectares (25,600 acres). Historic mining disturbances affect about 20 hectares (50 acres) located on District Property. Mining disturbances on non-District Property include the McLaren Tailings and McLaren Millsite, which cover an additional 6.9 hectares (17 acres).

The topography of the District is mountainous with dominant glacial features, and is situated at the headwaters of three river systems that all flow into the Yellowstone River. The three tributaries are the Clarks Fork of the Yellowstone, the Stillwater, and the Lamar. The Lamar River flows through Yellowstone Park. The major tributary streams in the District include Daisy, Miller, Fisher, Goose, Sheep, Lady of the Lake, Republic, Woody, and Soda Butte creeks.

## **I.3 PURPOSE AND OBJECTIVES**

The primary purpose of this work plan is to guide project activities that will be conducted in the 2007/2008 planning year. Objectives for the 2007/2008 Work Plan are consistent with those detailed in the Overall Project Work Plan (Maxim, 1999a) and those described in the Revised Support Document and Implementation Plan for Temporary Water Quality Standards (Maxim, 2003c). Primary objectives

for work done in 2007/2008 include: conducting response actions; collecting sufficient information to support engineering analyses and designs for response actions; monitoring water quality and revegetation success to document the results of response and restoration actions; and, satisfying the requirements of the rule allowing adoption of temporary water quality standards.

This page intentionally left blank.

## 2.0 SCOPE OF WORK

To meet the objectives for 2007/2008, the following activities will be performed:

- Maintain community relations in accordance with the Community Relations Plan (Maxim, 1999c).
- Maintain the project database and project website.
- Continue monitoring surface water and groundwater in the District including closely monitoring surface water and groundwater conditions downstream of the closed Glengarry Adit and downstream and within the capped McLaren Pit.
- Initiate restoration work on roads in the District and reconstruct the Daisy Pass trail in accordance with the preferred alternative selected in the Como Basin/Glengarry Adit/Fisher Creek EE/CA.
- Continue to monitor the New World Waste Repository and associated surface water and groundwater locations.
- Monitor revegetation at the New World Waste Repository, McLaren Pit, McLaren Triangle, McLaren borrow area, waste dumps reclaimed in Miller Creek, and the Glengarry and Gold Dust reclaimed areas.
- Prepare the 2007 Project Summary
- Prepare the 2008/2009 Work Plan

A more complete description of each of these activities is presented below.

### 2.1 COMMUNITY RELATIONS

A Community Relations Plan was developed for the project and is included in the Overall Project Work Plan (Maxim, 1999c). This plan describes community relation strategies that will be used to share information with the public and obtain timely input on proposed project activities. Community relation techniques include preparing news releases, preparing project summaries, conducting technical workshops and public meetings, making project documents readily available to interested parties, and accepting and responding to public comment on project activities.

Community relation activities described in the plan will be used in 2007/2008 to keep the public informed of project activities. Events expected for 2007/2008 with the anticipated timing of the events are listed in **Table I**. As other events arise during the year, the public will be informed in a timely manner in accordance with the Community Relations Plan.

<b>TABLE I COMMUNITY RELATION ACTIVITIES 2007/2008 Work Plan</b>	
<b>Event/Task</b>	<b>Timing</b>
Public Meeting	July 2007 - Cooke City
Technical Meeting Presenting 2007 Monitoring Results	January 2008 – Bozeman

## 2.2 MAINTAIN PROJECT WEBSITE AND DATABASE

The USDA Forest Service has maintained a project website since project inception. The website address is:

<http://www.fs.fed.us/rl/gallatin>

The project website contains general information on the project as well as a library of archived information specific to the work that has been conducted over the past eight years. The library contains downloadable versions of all documents that have been made available to the public in addition to a list of historic documents produced by various authors during the 1990's. Project information stored at the New World Response and Restoration Project document repository in Bozeman is also listed on the website. Environmental data that have been collected at the New World site are cataloged in a Microsoft Access® database, and analytical data for surface water and mine waste samples are available for downloading from this database.

The project website will be maintained to disseminate information, reports, and data related to the project. Relevant reports prepared during 2007/2008 will be posted to the website after hard copy documents are made available to the public. Other reports, such as technical memoranda, will also be available on the project website. The project water quality database will continue to be updated as new project information is collected during 2007/2008.

## 2.3 SURFACE WATER QUALITY MONITORING

This section of the work plan describes long-term and supplemental surface water monitoring activities that will be completed in 2007. In addition, surface water samples will be collected from selected adit discharges and stations below the New World Waste Repository.

### 2.3.1 Long-Term Surface Water Quality Monitoring

Surface water quality monitoring will be conducted in 2007 at the 12 sampling stations identified in the Long-Term Surface Water Quality Monitoring Plan (Maxim, 1999d). Long-term surface water sampling sites are shown on **Figure 2** and listed in **Table 2**. Samples will be collected before the onset of snowmelt (April), during higher flow conditions (June), and during low flow conditions in the fall (September/October).

Surface water samples will be collected and analyzed in accordance with procedures and methods described in the Site-Wide Sampling and Analysis Plan (SAP) (Maxim, 1999f). In addition to the analytical methods described in the Site-Wide SAP, analysis of dissolved metals will be added to the parameter list for selected sites. Analysis of dissolved metals will allow further evaluation of reclamation success, particularly in the McLaren Pit area, as dissolved metals analysis removes the contribution of metals present in suspended sediment. Sites selected for dissolved metals analysis are identified in **Table 2**.

**Table 3** lists surface water field parameters and standard operating procedures (SOPs) from the Site-Wide SAP. **Table 4** lists preservation and bottle requirements and **Table 5** lists surface water analytical requirements and practical quantitation limits (PQLs).

### **2.3.2 Supplemental Water Quality Monitoring**

Supplemental surface water stations will be monitored in Daisy Creek, Fisher Creek, and Miller Creek (**Table 2**). The monitoring objectives for each of the supplemental stations are listed in **Table 6**.

Samples will be collected from all supplemental surface water stations in conjunction with other long-term monitoring events (**Table 2**). Supplemental stations will be sampled and analyzed in accordance with procedures and methods described in the Site-Wide SAP (Maxim, 1999f). **Tables 3, 4, and 5** list field parameters, sampling requirements, and analytical requirements.

### **2.3.3 Adit Discharge Monitoring**

There are 27 adit openings that have been inventoried in the District that discharge water of various quality into the Daisy, Miller, Fisher, and Soda Butte watersheds. Water quality characteristics of these discharges were summarized in the Draft Adit Discharge EE/CA (Tetra Tech, 2006). Of the 27 sites with discharges, only ten are perennial discharges with water quality that exceeds Montana water quality standards or guidelines (**Table 7**).

In accordance with the preferred alternative selected in the Draft EE/CA, adit discharges with water quality exceedances will be monitored in 2007 (**Figure 3**). Samples will be collected from each site twice in 2007, once in August and again in September, to characterize the discharge during base flow conditions. Adit discharge sites will be sampled and analyzed in accordance with procedures and methods described in the Site-Wide SAP (Maxim, 1999f). **Tables 3, 4, and 5** list field parameters, sampling requirements, and analytical requirements. Both dissolved and total recoverable metals will be analyzed.


### **2.3.4 New World Repository Monitoring**

Surface water monitoring will be conducted at the New World waste repository in accordance with the methods and procedures described in the New World Waste Repository Long-Term Monitoring Plan (Maxim, January 2006). Surface water monitoring includes monitoring water quality in surface water tributaries SBT-3 and SBT-6 downstream of the repository. Monitoring will be conducted in April prior to snowmelt, during high flow conditions in May, and during low flow conditions in the fall. Samples will be collected for both dissolved and total recoverable metals analysis as well as field parameters, physical parameters, and common ions.


<b>TABLE 2 2007 SURFACE WATER SAMPLE SITES 2007/2008 Work Plan</b>					
<b>Site Name</b>	<b>Location</b>	<b>April</b>	<b>May</b>	<b>June</b>	<b>Sept/ Oct</b>
<b>Daisy Creek Drainage</b>					
DCT-7*	Daisy Cr. tributary south of McLaren Pit	--	--	<b>X</b>	<b>X</b>
DCT-8*	Daisy Cr. tributary south of McLaren Pit	--	--	<b>X</b>	<b>X</b>
DCT-9*	Daisy Cr. tributary south of McLaren Pit	--	--	<b>X</b>	<b>X</b>
USGS-1700*	Daisy Cr. tributary south of McLaren Pit	--	--	<b>X</b>	<b>X</b>
Cover Drains*	McLaren Pit drains beneath cover (DCSW-101, -102, -103)	--	--	<b>X</b>	<b>X</b>
DC-2	Daisy Creek below confluence of McLaren tributaries	<b>X</b>	--	<b>X</b>	<b>X</b>
DC-5*	Daisy Creek above confluence with Stillwater River	<b>X</b>	--	<b>X</b>	<b>X</b>
USGS-11890*	Stillwater River below the mouth of Daisy Creek	--	--	--	<b>X</b>
SW-7*	Stillwater River at Stillwater Trail Crossing	<b>X</b>	--	<b>X</b>	<b>X</b>
<b>Fisher Creek Drainage</b>					
FCT-12*	Tributary south of former Glengarry Adit	--	--	<b>X</b>	<b>X</b>
FCT-11*	Tributary below Como Basin	--	--	<b>X</b>	<b>X</b>
SW-3	Fisher Creek below former Glengarry Adit	<b>X</b>	--	<b>X</b>	<b>X</b>
FC-4*	Fisher Creek just above the Gold Dust Adit tributary (USGS synoptic station 1,704 meters)	--	--	--	<b>X</b>
SW-4*	Fisher Creek at Lulu Pass Road Crossing	<b>X</b>	--	<b>X</b>	<b>X</b>
CFY-2*	Fisher Creek above Clarks Fork confluence	<b>X</b>	--	<b>X</b>	<b>X</b>
<b>Clarks Fork River Drainage</b>					
SW-6*	Clarks Fork Yellowstone River at Saw Mill Road	<b>X</b>	--	<b>X</b>	<b>X</b>
<b>Miller Creek Drainage</b>					
SW-2*	Miller Creek below Miller Mountain Road Crossing	<b>X</b>	--	<b>X</b>	<b>X</b>
SW-5*	Miller Creek near mouth	<b>X</b>	--	<b>X</b>	<b>X</b>
<b>Soda Butte Creek Drainage</b>					
SBT-3*	Soda Butte Creek Tributary below Repository Site	<b>X</b>	<b>X</b>	--	<b>X</b>
SBT-6*	Soda Butte Creek Tributary below Repository Site	<b>X</b>	<b>X</b>	--	<b>X</b>
SBC-1	Soda Butte Creek above confluence with Miller Creek	<b>X</b>	--	<b>X</b>	<b>X</b>
SBC-2	Soda Butte Creek below McLaren Tailings	<b>X</b>	--	<b>X</b>	<b>X</b>
RR-SBSW-102	Soda Butte Creek below Woody Creek	<b>X</b>	--	<b>X</b>	<b>X</b>
SBC-4	Soda Butte Creek at Park Boundary	<b>X</b>	--	<b>X</b>	<b>X</b>

Note: \* Indicates sample will be analyzed for both total and dissolved metals.

Data Source: Unimproved roads and surface water sample locations from Gallatin National Forest Interagency Spatial Analysis Center. Cartographic feature files obtained from Montana State Library, Natural Resource Information System.

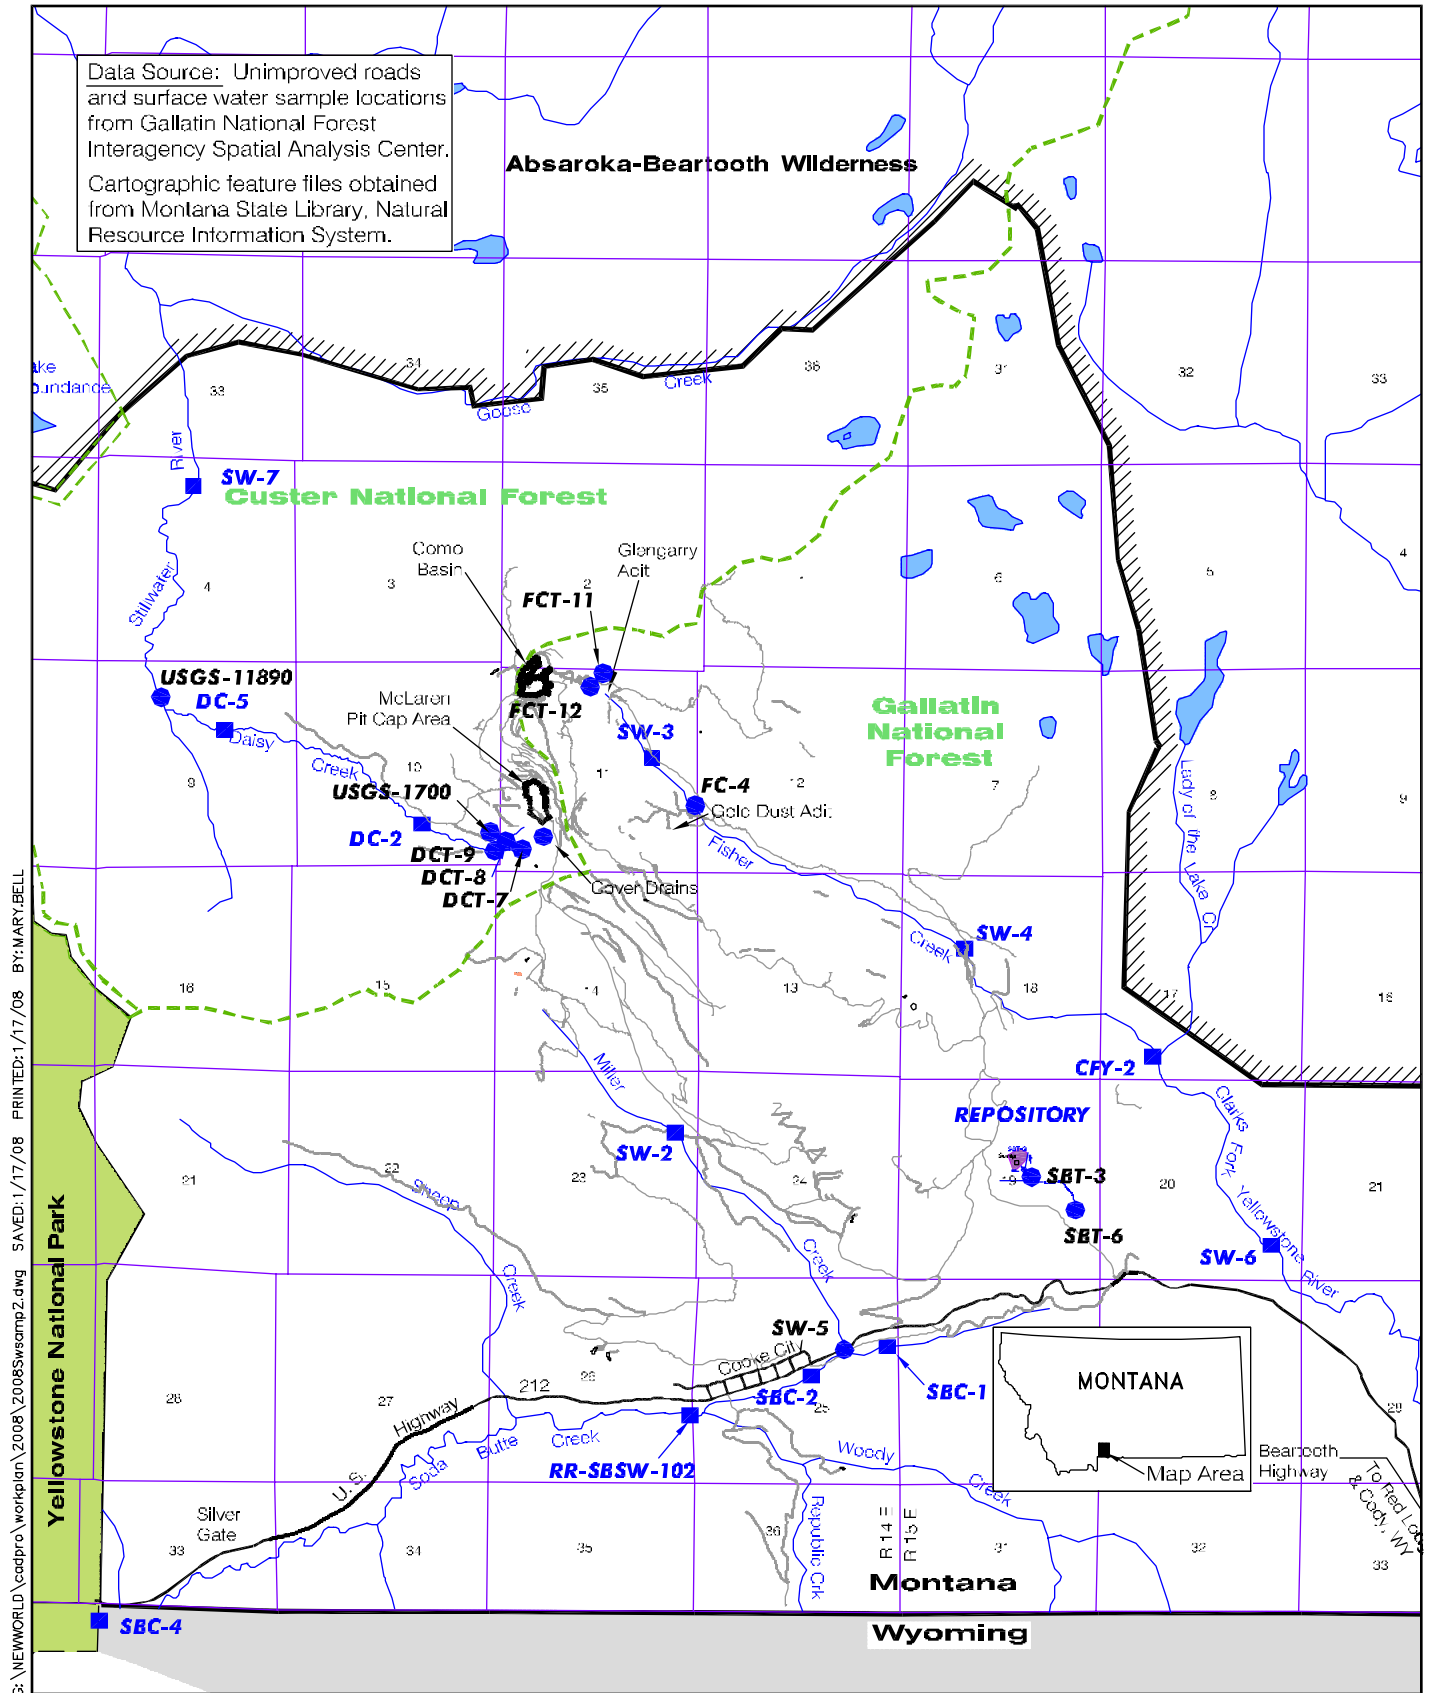


G:\NEWORLD\cadpro\workplan\2008\2008swsmap2.dwg SAVED:1/17/08 PRINTED:1/17/08 BY:MARY,BELL




- District Boundary
- Unimproved Road
- National Forest Boundary
- Wilderness Boundary
- Long-Term Monitoring Station
- Supplemental Monitoring Station

Surface Water Monitoring Stations  
 New World Mining District  
 Response and Restoration Project  
 Cooke City Area, Montana  
**FIGURE 2**

G:\NEWORLD\cadpro\workplan\2007\dumpsite2.dwg SAVED: 2/26/08 PRINTED: 2/26/08 BY: MARY BELL

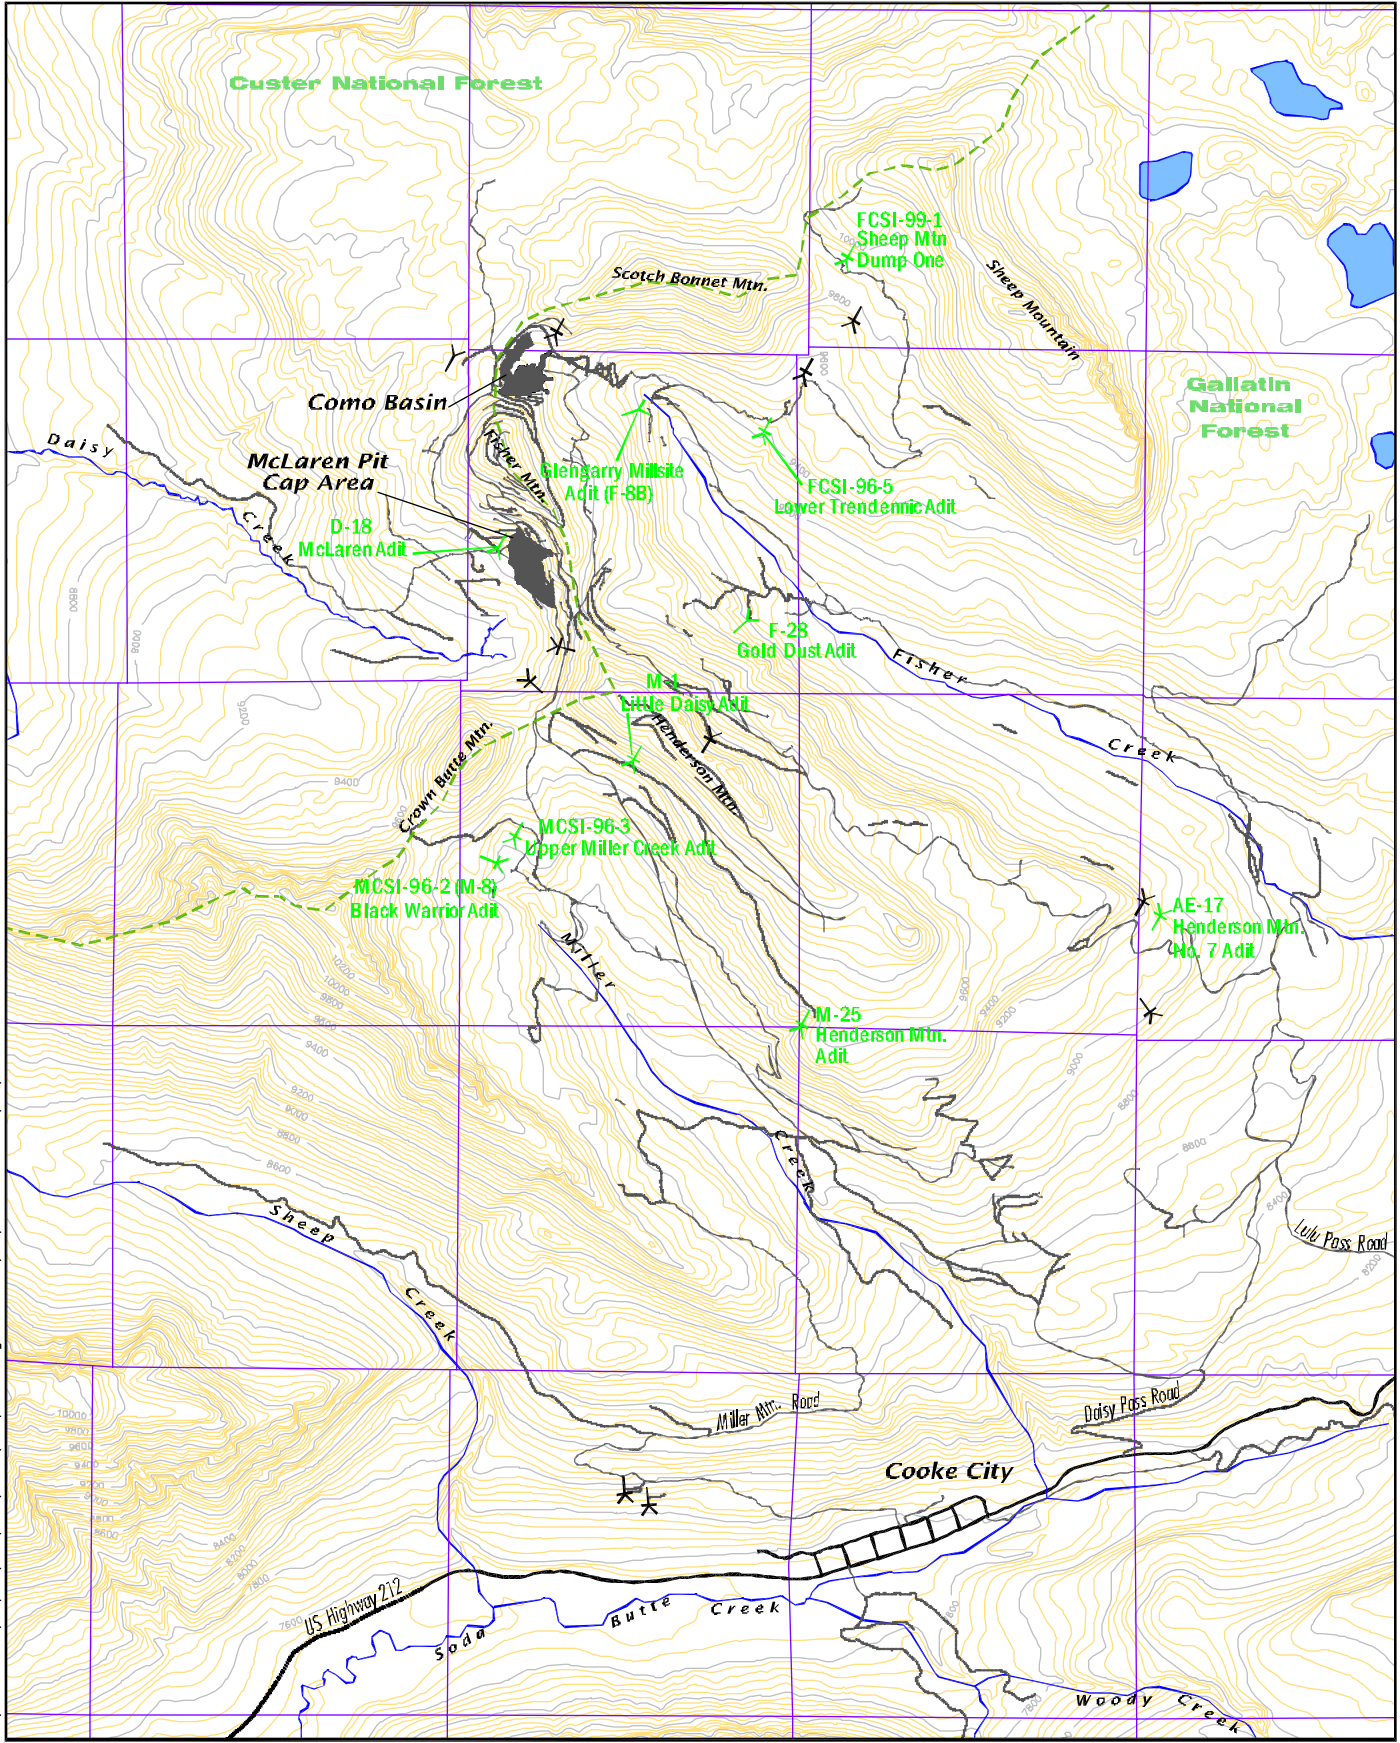

Source: Topographic data from USGS 7.5 Cooke City Quad  
Contour Interval = 40'



- Forest Boundary
- Roads
- Y Adit Sample Site
- Y Other Adit Discharge Site

**2007 Adit Discharge Sample Sites**  
**New World Mining District**  
**Response and Restoration Project**  
**Cooke City Area, Montana**  
**FIGURE 3**

**TABLE 3  
SURFACE WATER FIELD PARAMETERS  
2007/2008 Work Plan**

<b>Parameter</b>	<b>SOP Number<sup>(1)</sup></b>	<b>SOP Title</b>	<b>Event</b>
Specific Conductance	SOP-05	Field Measurement of Specific Conductance	All
pH	SOP-06	Field Measurement of pH	All
Water Temperature	SOP-07	Field Measurement of Water Temperature	All
Flow	SOP-01	Streamflow Measurement; Wading Technique	All

- 1 Maxim Standard Operating Procedures (Appendix A, Site-Wide SAP)
- 2 Field analysis will be conducted using a Hach DR 2000 Spectrophotometer following the procedures in Hach Water Analysis Handbook (1991)

**TABLE 4  
SURFACE WATER SAMPLING REQUIREMENTS  
2007/2008 Work Plan**

<b>Parameter</b>	<b>Preservation<sup>(1)</sup></b>	<b>Bottle Size/Type</b>
Total Recoverable Metals	HNO <sub>3</sub> to pH < 2; Iced to 4°C	250 milliliter polyethylene
Dissolved Metals	Filtered through 0.45 micron filter; HNO <sub>3</sub> to pH < 2; Iced to 4°C	250 milliliter polyethylene
Common Ions/Physicochemical	Iced to 4°C	500 milliliter polyethylene

- 1 HNO<sub>3</sub> = nitric acid

**TABLE 5  
SURFACE WATER ANALYTICAL REQUIREMENTS  
2007/2008 Work Plan**

<b>Parameter</b>	<b>PQL (mg/L)<sup>(1)</sup></b>	<b>EPA Method No.</b>	<b>Max. Holding Time</b>
<b>Physicochemical</b>			
Specific Conductivity	None	2310B	28 days
pH	None	150.1	Upon arrival at lab
Total Dissolved Solids	None	2340C	7 days
Total Suspended Solids	None	160.2	7 days
Hardness	None	2340B	6 months
Acidity	None	305.1	14 days
<b>Metals<sup>(2)</sup></b>			
Aluminum	0.05	200.8/200.7	6 months
Cadmium	0.0001	200.8/200.7	6 months
Copper	0.001	200.8/200.7	6 months
Iron	0.01	200.8/200.7	6 months
Lead	0.001	200.8/200.7	6 months
Manganese	0.003	200.8/200.7	6 months
Zinc	0.01	200.8/200.7	6 months
<b>Common Cations<sup>(2)</sup></b>			
Calcium	1.0	200.8/200.7	6 months
Magnesium	1.0	200.8/200.7	6 months
Potassium	1.0	200.8/200.7	6 months
Sodium	1.0	200.8/200.7	6 months
<b>Common Anions<sup>(2)</sup></b>			
Sulfate	None	375.2	28 Days
Bicarbonate	None	2320B	14 Days
Carbonate	None	2320B	14 Days
Chloride	None	325.3	28 Days

1 PQL = Practical Quantitation Limit in milligrams per liter (mg/L)

2 Surface water parameters will be analyzed as total recoverable (unfiltered); for the select stations shown in Table 2, both total and dissolved metals will be analyzed.

<b>TABLE 6 SUPPLEMENTAL SURFACE WATER SAMPLE SITE MONITORING OBJECTIVE 2007/2008 Work Plan</b>		
<b>Site Name</b>	<b>Location</b>	<b>Monitoring Objective</b>
<b>Daisy Creek Drainage</b>		
DCT-7	Daisy Cr. tributary south of McLaren Pit	Establishes water quality conditions upgradient of pit influence
DCT-8	Daisy Cr. tributary south of McLaren Pit	Measure impacts from capped area
DCT-9	Daisy Cr. tributary south of McLaren Pit	Measure impacts from capped area
USGS-1700	Daisy Cr. tributary south of McLaren Pit	Impacted by McLaren Mine drainage
Cover Drains	McLaren Pit drains beneath cover (DCSW-101, -102, -103)	Drainage from beneath capped area
USGS-11890	Stillwater River below the mouth of Daisy Creek	Determine water quality conditions in Stillwater River below the mouth of Daisy Creek
<b>Fisher Creek Drainage</b>		
FCT-12	Tributary draining unmined area below Fisher Mountain	Background condition for unmined area
FCT-11	Tributary draining the Como Basin	Como Basin contribution to Fisher Creek
FC-4	Fisher Creek just above the Gold Dust Adit tributary (USGS synoptic station 1,704 meters)	Station below notable groundwater input to Fisher Creek with historic data; evaluates water quality changes in Fisher Creek from Glengarry Mine closure
<b>Miller Creek Drainage</b>		
SW-5	Miller Creek near mouth	Miller Creek input to Soda Butte Creek
<b>Soda Butte Creek Drainage</b>		
SBT-3	Soda Butte Creek Tributary below Repository Site	Measures potential impacts immediately below repository
SBT-6	Soda Butte Creek Tributary below Repository Site	Measures potential impacts further downstream of repository

<b>Adit Station No.</b>	<b>Site Name<sup>(1)</sup></b>	<b>Drainage</b>	<b>Last Sampled</b>	<b>Flow (gpm)<sup>(2)</sup></b>	<b>Exceedance<sup>(3)</sup></b>
F-8B	Glengarry Millsite Adit	Fisher	7/29/2004	5.0	Cu, Fe, Mn
F-28	Gold Dust Adit	Fisher	9/26/2006	3.6	Fe, Mn
FCSI-96-5	Lower Tredennic Dump 1	Fisher	9/22/2004	1.4	Fe, Mn
FCSI-99-1	Sheep Mountain #1 (NDP)	Fisher	7/16/2003	2.0	Fe, Pb
D-18	McLaren Adit	Daisy	9/23/2004	4.7	Cu, Fe, Mn
M-8	Black Warrior Adit	Miller	9/23/2004	8.1	Cd
MCSI-96-3	Upper Miller Creek Dump (NDP)	Miller	7/16/2003	2.0	Cd
M-1	Little Daisy Adit	Miller	9/23/2004	2.9	Cd, Fe, Mn
M-10	Upper Little Daisy Adit	Miller	--	--	--
M-25	Henderson Mt Adit	Miller	7/10/2003	2.0	Cu, Pb
AE-17	Henderson Mountain Dump 7	Fisher	7/15/2003	5.0	Cu, Fe, Mn

- Notes: 1 Adit sites will be sampled twice in 2007 during August and September; samples will be analyzed for total and dissolved metals; NDP = non-District Property  
 2 gpm = gallons per minute  
 3 Exceedance of water quality standard or guideline in most recent sample available; Cd = cadmium; Cu = copper; Fe = iron; Mn = manganese; Pb = lead

## 2.4 GROUNDWATER MONITORING

Groundwater monitoring will be conducted in 2007 at the wells shown in **Tables 8 and 9**. Well locations are shown on **Figures 4 and 5**. Groundwater monitoring activities are discussed in the following subsections.

### 2.4.1 Fisher Creek Groundwater Monitoring

Wells scheduled for the long-term monitoring event will be monitored one time in 2007 in July (**Table 8**). These wells have generally been monitored annually since well installation. Monitoring will be conducted in July when water levels at the higher elevation sites are typically at the highest level reached during the year. Past experience has shown that water quality is generally more mineralized and contains higher concentrations of contaminants during this high water level period. Field parameters and water level will also be measured in well FCGW-100, the Glengarry Adit well, once per month beginning in July and ending in September.

The July long-term groundwater monitoring event will involve measuring water levels, measuring field parameters, and collecting samples for laboratory analysis. **Table 10** lists field parameters that will be measured and **Tables 11 and 12** list groundwater analytical parameters and practical quantitation limits (PQLs).

**TABLE 8  
FISHER CREEK AND REPOSITORY WELL MONITORING  
2007/2008 Work Plan**

Well No.	Year Installed	Completion Formation	Monitoring Event				
			May	July	Aug	Sep	Continuous
<b>Fisher Creek Area</b>							
EPA-11	1996	Tertiary Intrusive Dike	--	X	F	F	--
EPA-12	1996	Scotch Bonnet Diorite	--	X	F	F	--
FCGW-100	2004	Glengarry Adit behind plugs	--	X	F	F	--
MW-1	1989	Wolsey Shale	--	X	--	--	--
MW-9A	1990	Alluvium	--	X	--	--	--
MW-9B	1990	Precambrian	--	X	--	--	--
MW-10A	1990	Alluvium	--	X	--	--	--
MW-10B	1991	Precambrian	--	X	--	--	--
MW-11	1990	Precambrian	--	X	--	--	--
SB-16	1991	Precambrian	--	X	--	--	--
Tracer-5	1997	Fisher Mtn. Intrusive	--	X	--	--	--
<b>New World Waste Repository</b>							
SBGW-105T	1999	Till	X	X	--	--	W
SBGW-105	1999	Granite	X	X	--	--	--
SBGW-107T	1999	Till	X	X	--	--	W
SBGW-107	1999	Granite	X	X	--	--	--
SBGW-108T	1999	Till	X	X	--	--	--
SBGW-108	1999	Granite	X	X	--	--	--

Note: X Samples collected and analyzed for full suite of laboratory parameters.  
 F Samples collected and monitored for field parameters only.  
 W Continuous water level monitoring.  
 -- Indicates no monitoring

**TABLE 9  
MCLAREN PIT AREA MONITORING WELLS  
SCHEDULED FOR SAMPLING IN 2007  
2007/2008 Work Plan**

Well No.	Year Installed	Completion Formation	Monitoring Event	
			July	September
DCGW-100	2003	Meagher Limestone	X	F
DCGW-101S	2001	Colluvium	X	F
DCGW-101D	2001	Lulu Pass Rhyodacite Porphyry	X	F
DCGW-111S	2003	Colluvium	X	F
DCGW-111D	2003	Bedrock	X	F
Tracer-2	1997	Fisher Mtn. Intrusive	X	F
MW-2	1989	Wolsey Shale	X	F
MW-3	1989	Wolsey Shale	X	--
DCGW-103S	2001	Colluvium	F	--
DCGW-103D	2001	Bedrock	F	--
DCGW-104§	2001	Waste Rock	X	F
DCGW-105§	2001	Waste Rock	X	F
DCGW-106	2002	Colluvium	F	--
DCGW-107	2002	Colluvium	X	--
DCGW-108	2002	Colluvium	X	--
DCGW-109	2002	Colluvium	F	--
DCGW-110	2002	Colluvium	F	--
DCGW-112	2002	Colluvium	F	--
DCGW-131	2002	Colluvium	F	F
DCGW-132	2002	Colluvium	X	F
DCGW-133	2002	Colluvium	X	F
DCGW-134	2002	Colluvium	F	F
DCGW-135	2002	Colluvium	F	F
DCGW-136	2002	Colluvium	X	F
DCGW-137	2002	Colluvium	X	F
DCGW-138	2002	Colluvium	X	--

Notes: X Indicates well will be sampled for full suite of laboratory parameters along with depth to water and field parameters  
 F Indicates only depth to water and field parameters monitored  
 § Continuous water level monitoring  
 -- Indicates no monitoring

<b>TABLE I0 GROUNDWATER FIELD PARAMETERS 2007/2008 Work Plan</b>			
<b>Parameter</b>	<b>SOP Number<sup>(1)</sup></b>	<b>SOP Title</b>	<b>Event</b>
Specific Conductance	SOP-05	Field Measurement of Specific Conductance	All
pH	SOP-06	Field Measurement of pH	All
Water Temperature	SOP-07	Field Measurement of Water Temperature	All
Oxidation-Reduction	SOP-28	Field Measurement of Redox Potential (Eh)	All
Dissolved Oxygen	SOP-08	Field Measurement of Dissolved Oxygen	All
Depth to Water	SOP-20	Field Measurement of Groundwater Level	All

1 Maxim Standard Operating Procedures (Appendix A, Site-Wide SAP)

<b>TABLE I1 GROUNDWATER SAMPLING REQUIREMENTS 2007/2008 Work Plan</b>		
<b>Parameter</b>	<b>Preservation<sup>(1)</sup></b>	<b>Bottle Size/Type</b>
Dissolved Metals	Filtered through 0.45 micron filter; HNO <sub>3</sub> to pH < 2; Iced to 4°C	250 milliliter polyethylene
Common Ions/Physicochemical	Iced to 4°C	500 milliliter polyethylene

1 HNO<sub>3</sub> = nitric acid

### **2.4.2 McLaren Pit Groundwater Monitoring**

Extensive monitoring will be conducted in the McLaren Pit area (**Table 9**), as was done in previous years, to closely monitor changes in groundwater conditions that may result from the capping of the McLaren Pit waste rock, which was capped in 2003. McLaren Pit wells will be monitored in July, when water levels are at or near seasonal highs, and once again in September/October.

Monitoring will involve measuring water levels, measuring field parameters, and collecting samples for laboratory analysis. As shown in **Table 9**, samples will only be collected from select wells for laboratory analysis in July, with the remaining wells slated for measurement of field parameters only. In September, only field parameters will be measured (**Table 10**). Groundwater samples will be submitted to an analytical laboratory for analysis of parameters listed in **Table 12**.

### **2.4.3 Install Pressure Gage on Well FCGW-100**


Monitoring well FCGW-100 is completed at a depth of 120 meters (396 feet) in the former workings of the Glengarry Adit behind Plug No. 6. This well was installed in 2004 and exhibited artesian flow out of the surface casing for most of the 2005 field season and all of the 2006 field season. This well will be capped at the surface with a sampling port and pressure gage to eliminate the uncontrolled flow out of the casing and allow continued monitoring of pressure and water quality.

### **2.4.4 New World Repository Monitoring**

Groundwater monitoring will be conducted at the New World waste repository in accordance with the methods and procedures described in the New World Waste Repository Long-Term Monitoring Plan (Maxim, January 2006). Groundwater monitoring includes measuring depth to water in the repository sump and monitoring groundwater in the monitoring well network established at the site.

Monitoring will include maintaining and downloading water level data from the continuous water level instrument and collecting water quality samples. Water quality parameters are listed in **Table 5** for the sump. If the sump fills to capacity with water, water in the sump will be pumped into appropriate water trucks and disposed at the Cody, Wyoming, sewage treatment ponds.

Groundwater monitoring will be conducted at the three well pair locations SBGW-105, -107, and -108 and include maintaining and downloading water level data from the continuous water level instruments installed in wells SBGW-105T and SBGW-107T and collecting water quality samples. Well locations are shown on **Figure 3**. Repository wells will be sampled twice: in late May when water levels are typically at the highest level reached during the year and in July after water levels have fallen to seasonal lows. Groundwater samples will be submitted to an analytical laboratory for analysis of parameters listed in **Table 12**.

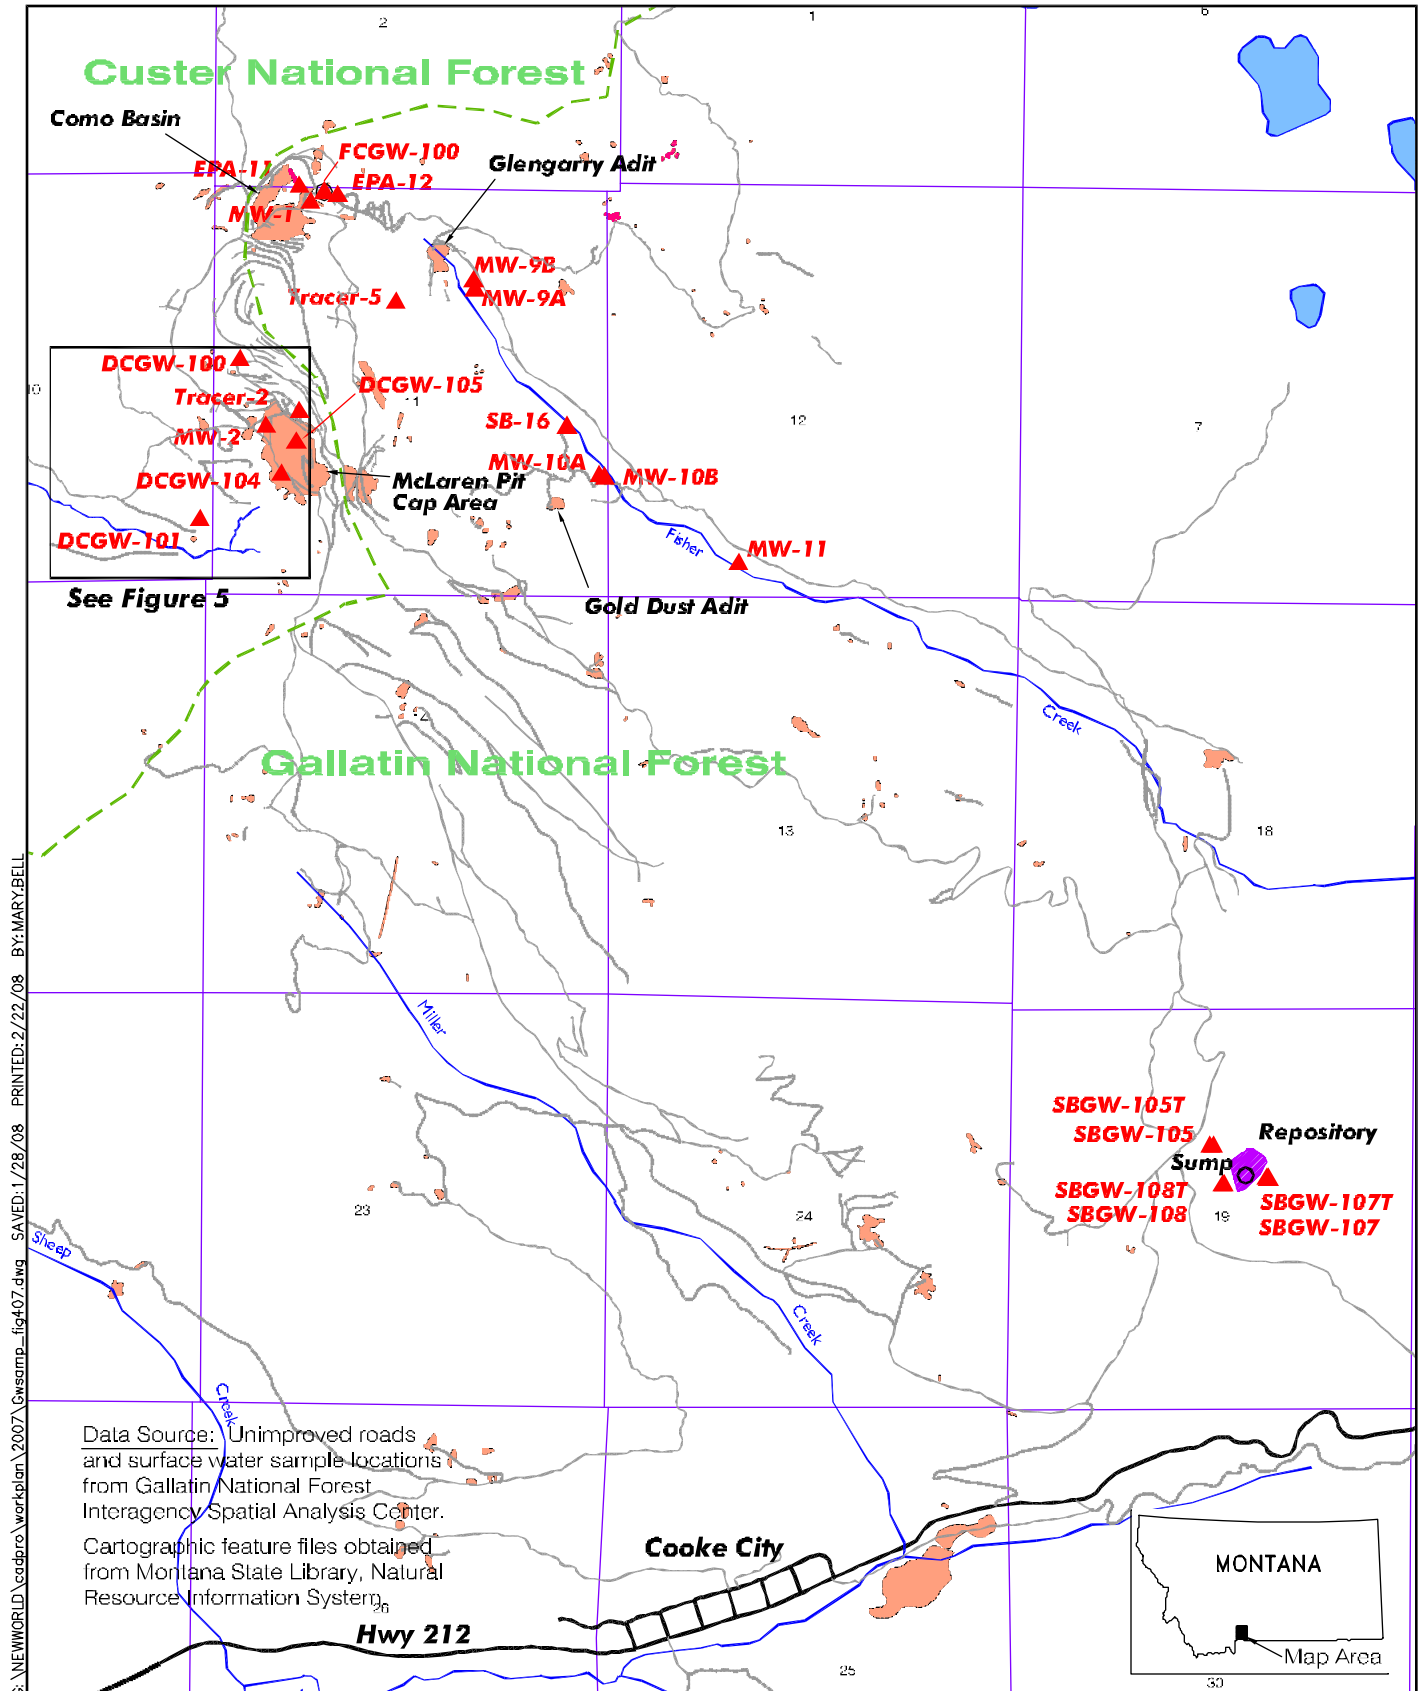

G:\NEWORLD\cdpr\workplan\2007\Gwsamp\_fig407.dwg SAVED:1/28/08 PRINTED:2/22/08 BY:MARY.BELL

Data Source: Unimproved roads and surface water sample locations from Gallatin National Forest Interagency Spatial Analysis Center.  
 Cartographic feature files obtained from Montana State Library, Natural Resource Information System.



0 Feet 2500



7561506.110

- ▲ **DCGW-100** Groundwater Monitoring Location
- National Forest Boundary
- Mine Waste Source Area
- Unimproved Road

2007 Groundwater Monitoring Stations  
 New World Mining District  
 Response and Restoration Project  
 Cooke City Area, Montana  
**FIGURE 4**

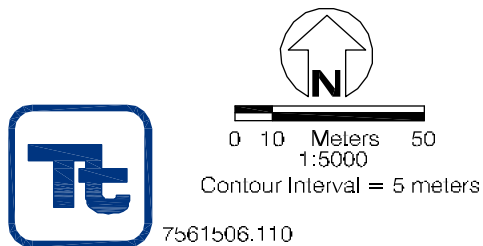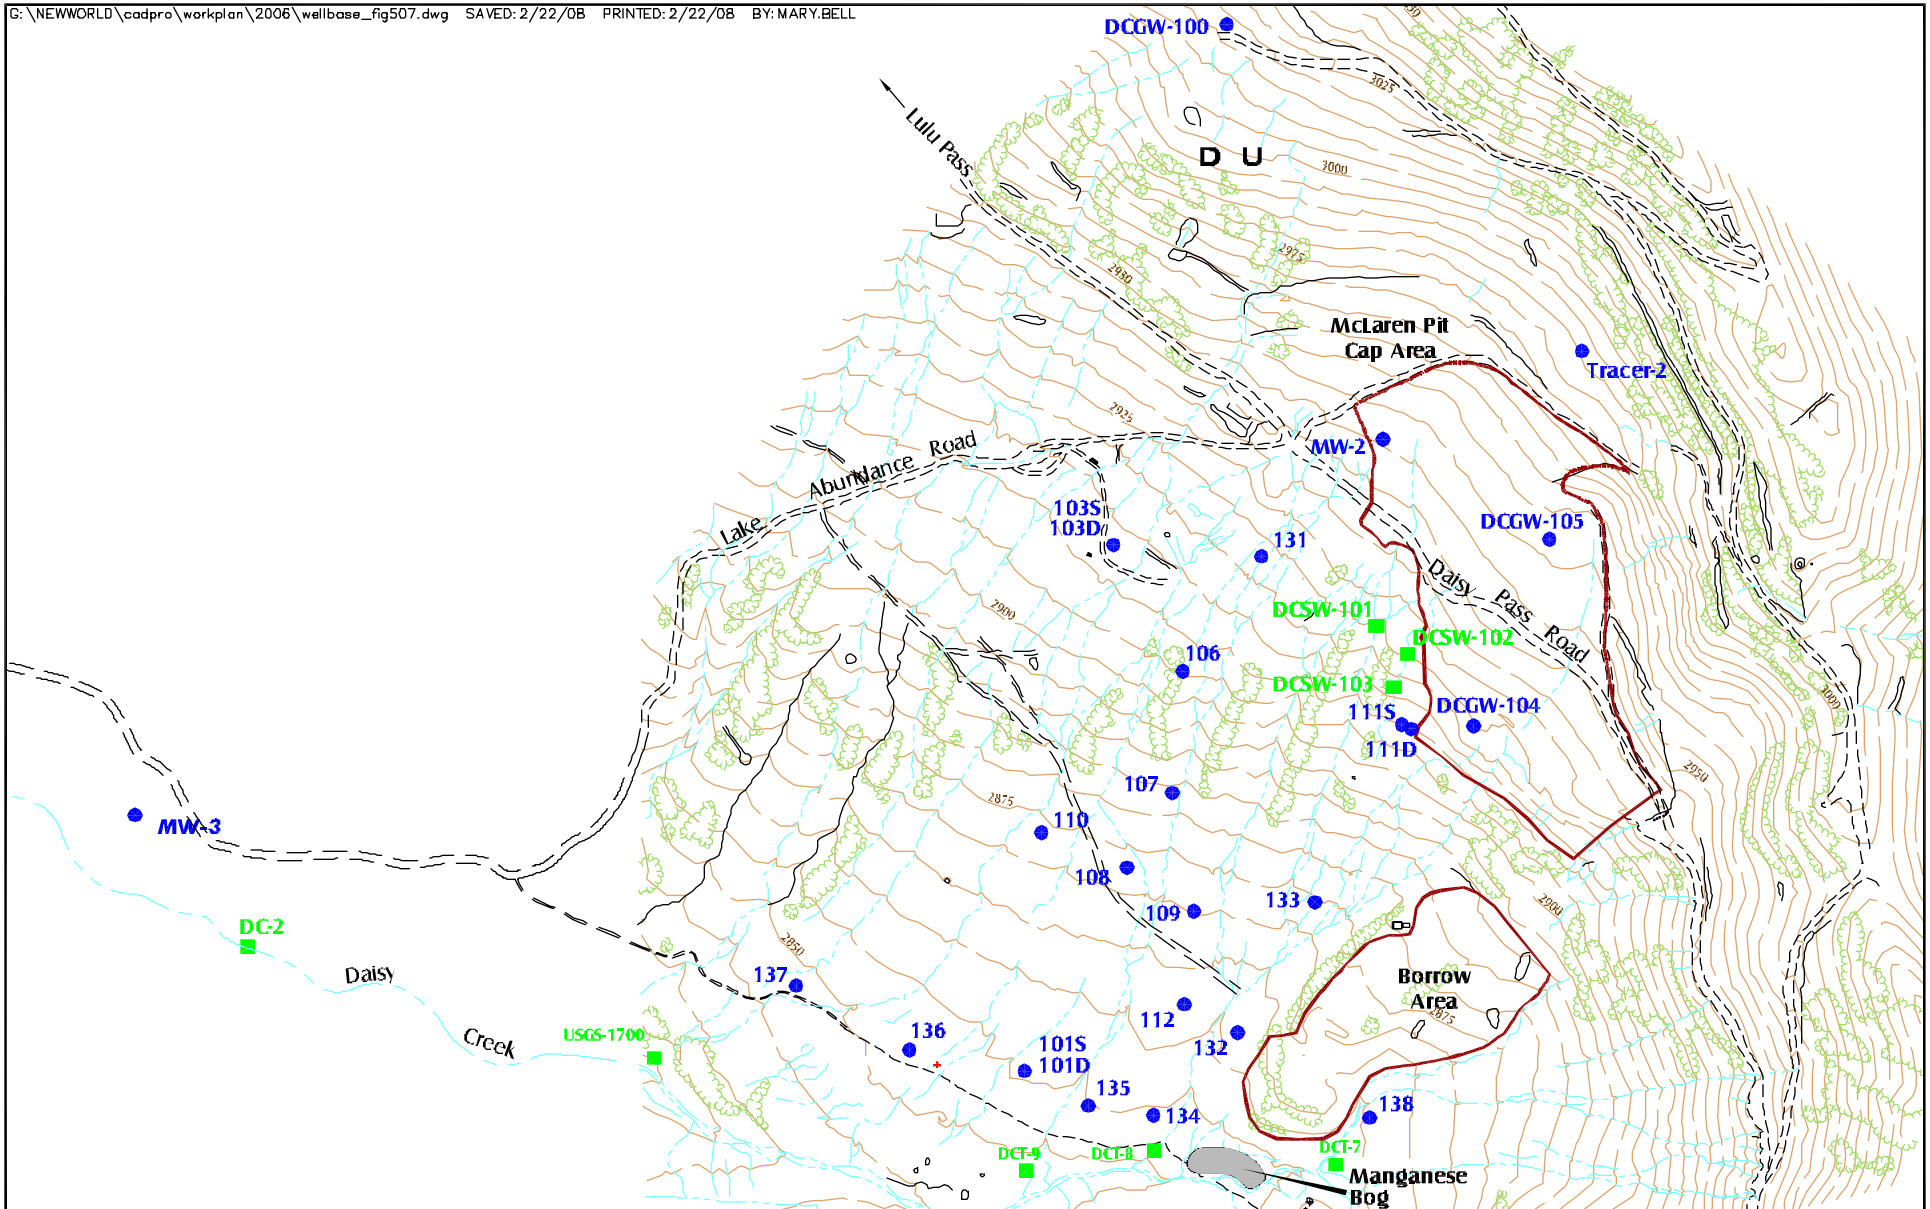

- Surface Water Station
- Monitoring Well (DCGW prefix may not be included)
- Creek/Drainage
- Road/Trail

2007 McLaren Pit Area Monitoring Stations  
 New World Mining District  
 Response and Restoration Project  
 Cooke City Area, Montana  
**FIGURE 5**

**TABLE 12  
GROUNDWATER ANALYTICAL REQUIREMENTS  
2007/2008 Work Plan**

<b>Parameter</b>	<b>PQL (mg/l)<sup>(1)</sup></b>	<b>EPA Method No.</b>	<b>Max. Holding Time</b>
<b>Physicochemical</b>			
Specific Conductivity	None	2310B	28 days
pH	None	150.1	Upon arrival at lab
Total Dissolved Solids	None	2340C	7 days
Hardness	None	2340B	6 months
Acidity	None	305.1	14 days
<b>Metals<sup>(2)</sup></b>			
Aluminum	0.05	200.8/200.7	6 months
Cadmium	0.0001	200.8/200.7	6 months
Copper	0.001	200.8/200.7	6 months
Iron	0.01	200.8/200.7	6 months
Lead	0.001	200.8/200.7	6 months
Manganese	0.003	200.8/200.7	6 months
Zinc	0.01	200.8/200.7	6 months
<b>Common Cations<sup>(2)</sup></b>			
Calcium	1.0	200.8/200.7	6 months
Magnesium	1.0	200.8/200.7	6 months
Potassium	1.0	200.8/200.7	6 months
Sodium	1.0	200.8/200.7	6 months
<b>Common Anions<sup>(2)</sup></b>			
Sulfate	None	375.2	28 Days
Bicarbonate	None	2320B	14 Days
Carbonate	None	2320B	14 Days
Chloride	None	325.3	28 Days

1 PQL = Practical Quantitation Limit in milligrams per liter (mg/L)

2 Groundwater parameters will be analyzed as dissolved constituents as filtered through a 0.45 micron filter

## 2.5 MCLAREN PIT AREA REVEGETATION

An area below the McLaren Adit and capped area of the pit is poorly vegetated and will be reclaimed in 2007 to improve vegetative cover (**Figure 6**). One of the areas covers about 0.2 hectares (0.5 acres) where mine waste from the multicolor dump was removed in 2003 and an area downslope of the former waste dump where mine seepage from the McLaren Mine discharged. In addition, native soils that developed on ferricrete deposits located between the McLaren Pit capped area and the road leading to the former borrow area are also acidic and have poor vegetation cover (**Figure 6**). To alleviate the unvegetated condition, the area shown on **Figure 6** will be amended with limestone and compost, fertilized, reseeded with the project seed mix, and covered with erosion mat. Fine-grained, agricultural limestone will be applied at two rates – 99 tons per hectare (40 tons per acre) in the former footprint of the multicolor dump and 60 tons per hectare (24 tons per acre) in all other areas. Limestone will be incorporated into the top 15 centimeters (six inches) of soil using an agricultural disk or other suitable equipment. Compost will be added to increase the organic matter in the top six inches of soil. All amended areas will be fertilized and seeded and covered with erosion control mat.

## 2.6 GLENGARRY CHANNEL RECONSTRUCTION

With the closure of the Glengarry Adit and the removal of the Glengarry waste dump in 2005, Fisher Creek was routed into its historic channel, leaving a relict channel that Fisher Creek was diverted into by the historic mining operation mostly dry. This former channel, referred to as the Glengarry channel, is susceptible to erosion and has steep, near-vertical streambanks. To prevent potential headcutting and erosion, several rock check dams will be constructed along the upper portion of the relict channel and rock aprons will be installed at select locations to dissipate stream energy. This natural resource restoration work will be completed in 2007.

## 2.7 ROAD OBLITERATION AND TRAIL CONSTRUCTION


In conjunction with the preferred alternative selected in the Miller Creek EE/CA and the Gallatin National Forest Travel Plan, eight road segments will be permanently obliterated and reclaimed (**Figure 7**). Road fills on these eight segments will be pulled back onto the roadway and graded to blend with the adjacent topography. The segments will be fertilized, seeded, and covered with erosion mat. In addition to this work, the Daisy Pass Trail will be realigned in 2007 and the former trail abandoned.



## 2.8 RECLAMATION MONITORING



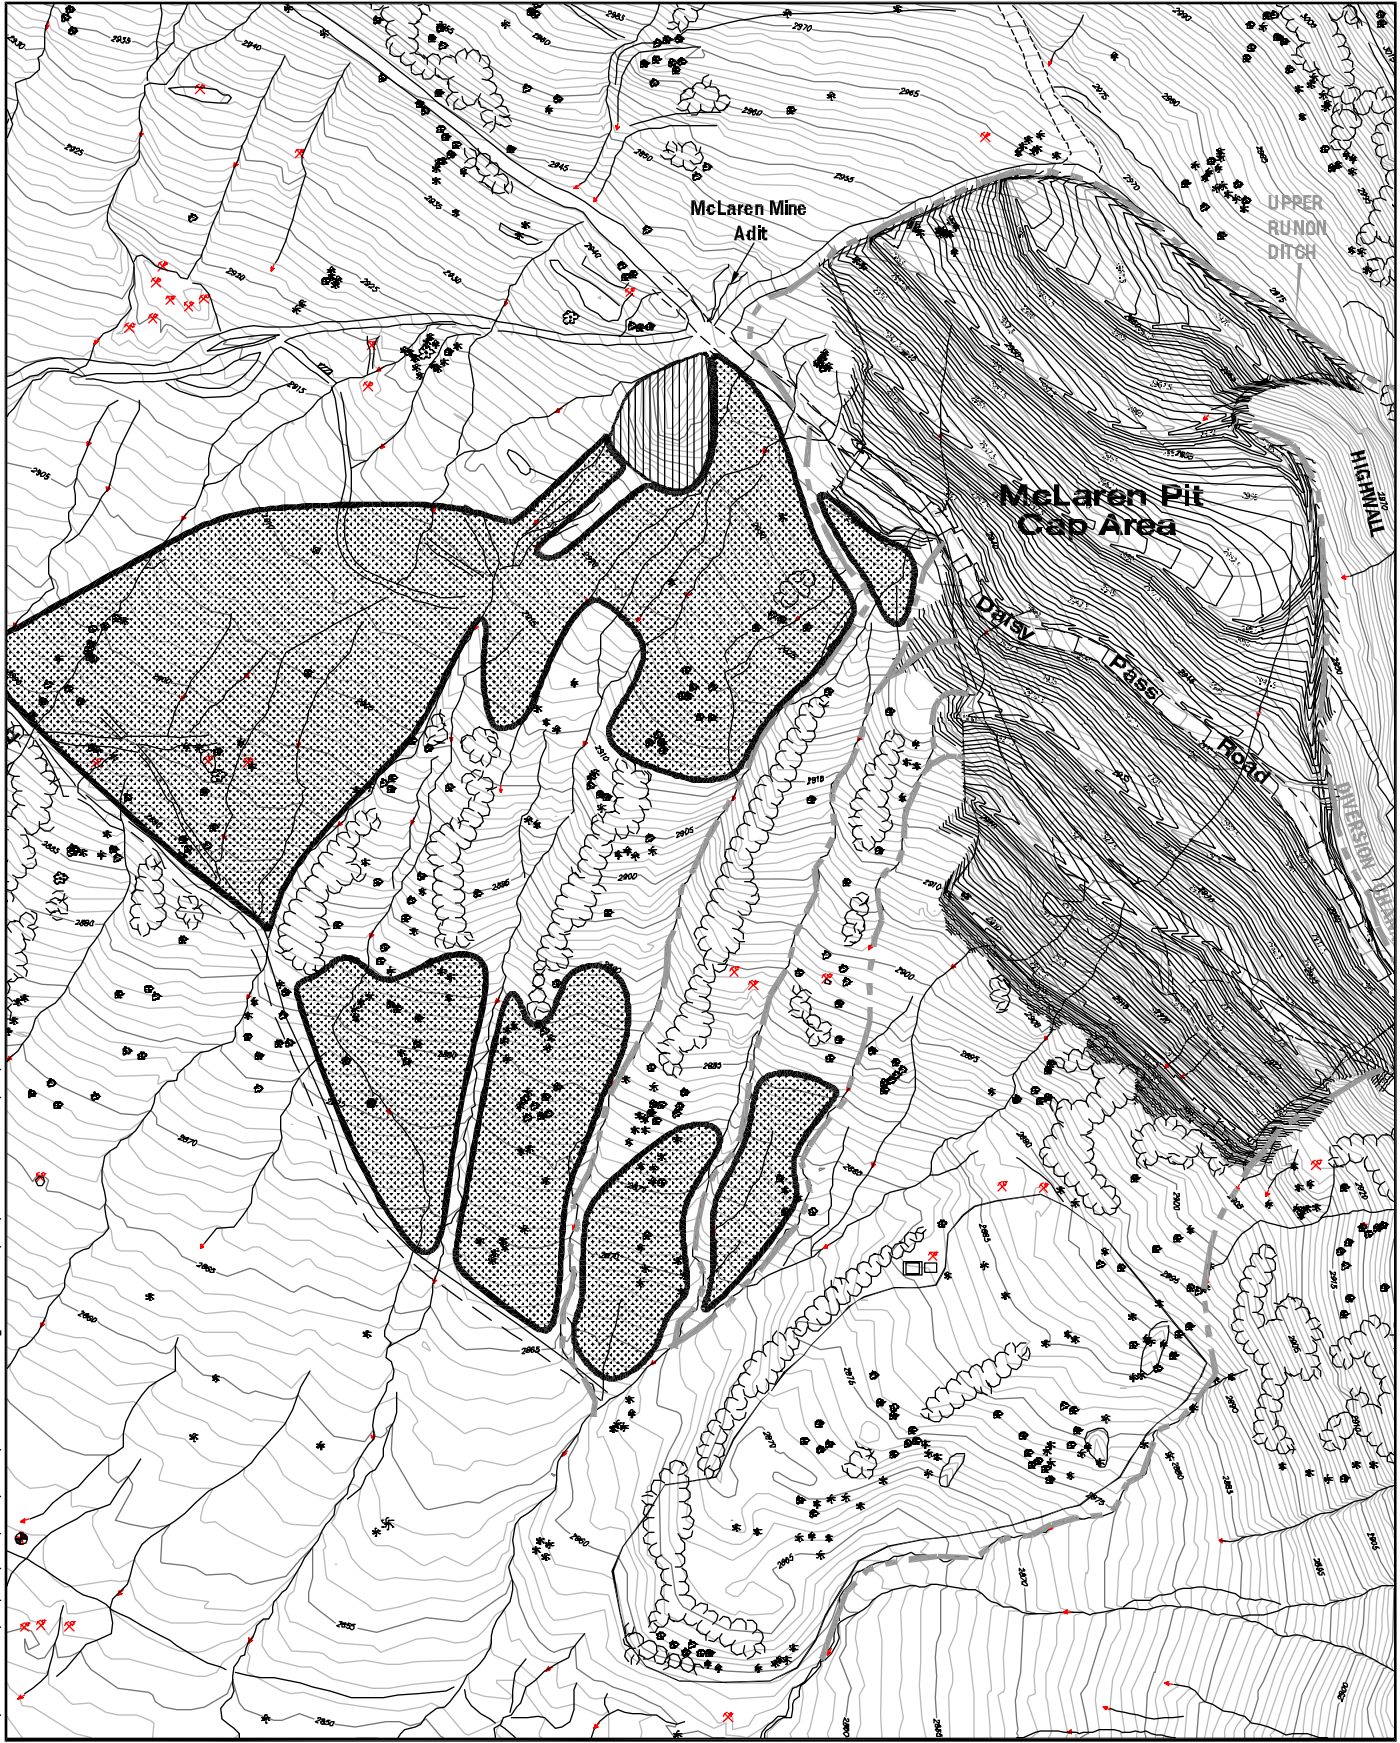


Reclamation monitoring in 2007 will involve documenting percent cover and species composition at select sites reclaimed in Daisy Creek and Miller Creek, and conducting area wide monitoring at sites reclaimed in the Fisher Creek drainage in 2006. The purpose of cover monitoring at these sites is to determine if revegetation cover is meeting the project objective of 20% and the purpose of area-wide monitoring is to determine if there are any erosion problems that warrant immediate attention or whether there are any germination failures in areas greater than 250 square feet. **Table 13** lists the sites that will be monitored and the type of monitoring that will be conducted. Reclamation monitoring will be conducted in accordance with monitoring procedures that are described in the Long-Term Revegetation Monitoring Plan (Maxim, 1999e).

If bare or eroded areas are observed during cover monitoring, soil samples will be collected for laboratory analysis. Samples will be collected from a depth interval of 0-15 cm and placed in one-gallon polyethylene bags. Samples will be labeled by location and returned to a qualified laboratory for selected analyses in accordance with the parameters and methods in the Site-Wide SAP for native soil


G:\NEWORLD\cadpro\_workplan\2007\Reclamation.dwg SAVED: 6/22/07 PRINTED: 2/22/08 BY: MARY BELL



  
 NORTH  
  
 0 5 Meters 60  
 Contour Interval = 1 meter  
 1:2400  
 (1 meter = 3.28 feet)  
 7561506.101

-  Riprap Runoff Channels
-  Ephemeral Drainage
-  Limestone Amendment Rate  
40 tons per acre
-  Limestone Amendment Rate  
24 tons per acre
-  Trees/Shrubs

**McLaren Pit Area Revegetation  
 Maintenance Sites  
 Response and Restoration Project  
 Cooke City Area, Montana  
 FIGURE 6**

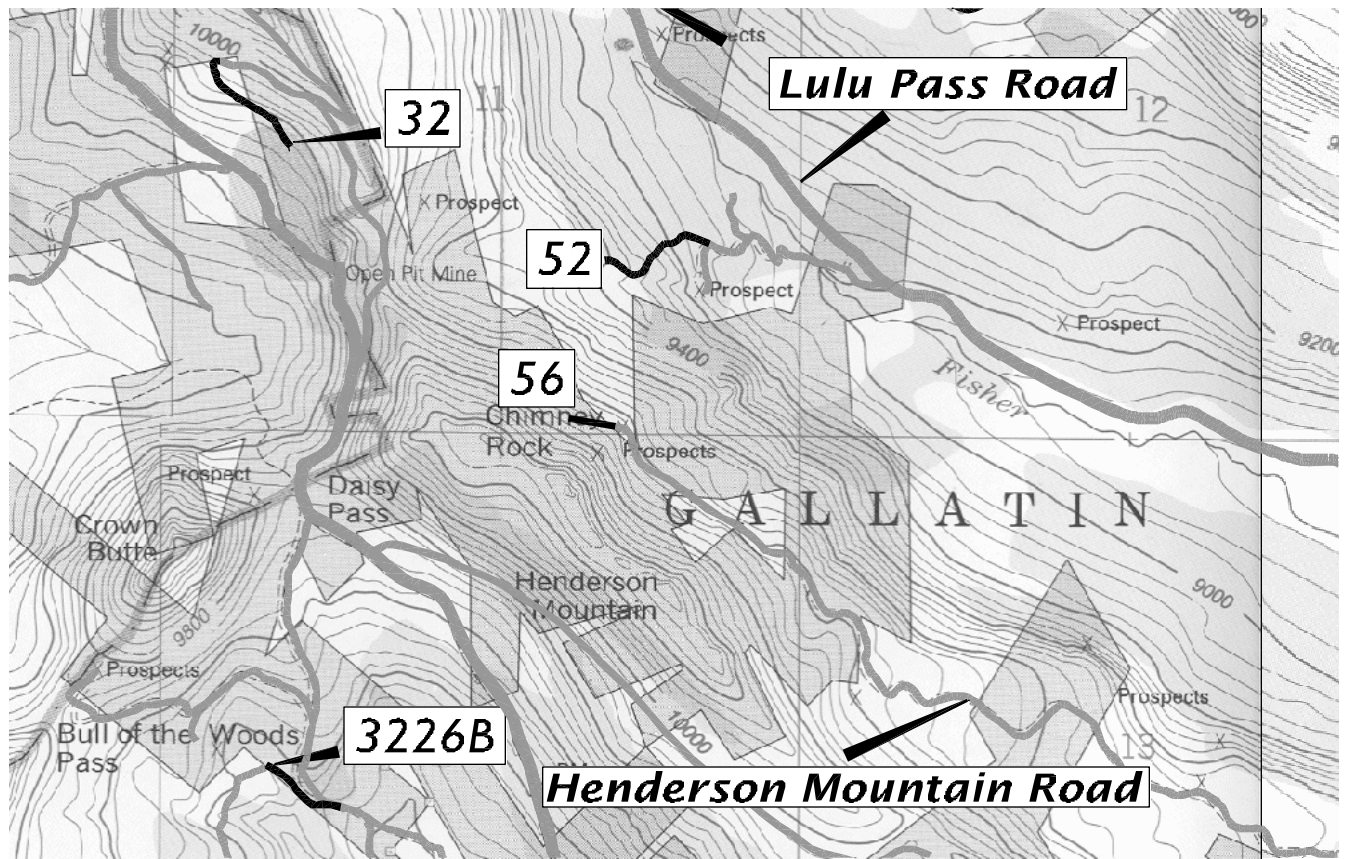

SCALE VARIES

7561506.101



— Road Obliteration Segment

Road Restoration Closure Locations  
 New World Mining District  
 Response and Restoration Project  
 Cooke City Area, Montana  
**FIGURE 7**

collection. Laboratory parameters may include USDA soil texture, coarse fragment content, organic matter, pH, electrical conductivity, nutrients, and total metals (aluminum, arsenic, cadmium, copper, lead, and zinc). Sample collection and parameter selection will be performed at the discretion of the field investigator to ensure site-specific conditions are being addressed. Following receipt of the laboratory analysis, recommendations will be made to amend soils or reseed barren areas.

**TABLE 13  
RECLAMATION MONITORING SITES  
2007/2008 Work Plan**

Site	Year Reclaimed	Monitoring Type	Site	Year Reclaimed	Monitoring Type
McLaren Pit	2003	Cover	Glengarry Waste Dump	2006	Area
McLaren Triangle	2003	Cover	Gold Dust	2006	Area
McLaren Borrow Area	2003	Cover	Como Basin	2006	Area
Black Warrior	2005	Cover	New World Repository	2006	Area
Little Daisy	2005	Cover			

## 2.9 PREPARE SITE-WIDE LONG-TERM OPERATIONS AND MAINTENANCE PLAN

A site-wide long-term operations and maintenance plan will be prepared to identify the annual tasks that will be completed once the response and reclamation project is complete. This plan will address what monitoring will be done to determine whether maintenance of the reclaimed sites and the repository is needed, how the maintenance work will be done, and the estimated costs of site-wide monitoring and maintenance.

## 2.10 PREPARE 2008/2009 WORK PLAN

A work plan similar to this plan will be prepared to guide specific work activities to be completed during 2008/2009. These activities will complement those performed under the long-term plans and will involve surface water, groundwater, and revegetation monitoring, construction monitoring, and construction activities.

## 3.0 PROJECT SCHEDULE

**Figure 8** illustrates the schedule for 2007/2008 activities.

**FIGURE 8**  
**NEW WORLD MINING DISTRICT RESPONSE AND RESTORATION PROJECT**  
**2007/2008 PROJECT SCHEDULE**

Task Name	Jan '07	Feb '07	Mar '07	Apr '07	May '07	Jun '07	Jul '07	Aug '07	Sep '07	Oct '07	Nov '07	Dec '07	Jan '08	Feb '08	Mar '08	Apr '08	May '08	Jun '08
Community Relations	[Blue bar]																	
Maintain Project Website/Database	[Blue bar]																	
Prepare 2007/2008 Work Plan						[Blue bar]												
Prepare Project Summary 2007							[Blue bar]											
Repository Sump Monitoring	[Blue bar]																	
Perform Spring Water Quality Mon.				[Blue bar]														
Perform May Repository Groundwater Monitoring					[Blue bar]													
Perform High Flow Surface Water Monitoring						[Blue bar]												
Perform July Groundwater Sampling							[Blue bar]											
McLaren Pit Area September Groundwater Monitoring																		
Road Closure and Trail Construction							[Blue bar]											
Revegetation Monitoring									[Blue bar]									
Perform Fall Surface Water Quality Monitoring																		
Prepare 2007/2008 Work Plan																		[Blue bar]

## 4.0 REPORTS

Project documents will be prepared during 2007/2008 for many of the items discussed in Section 2.0. These documents are summarized in **Table 14** along with a description of the document contents and approximate delivery schedule.

<b>Deliverable Title</b>	<b>Contents</b>	<b>Delivery Schedule</b>
2007/2008 Work Plan	This Document	Draft – June 2007 Final – July 2007
Project Summary 2007	Summary document of project activities completed since 1999	July 2007
Reclamation Monitoring Report	Reclamation monitoring results	January 2008
Site-Wide Long-Term Operations and Maintenance Plan	Monitoring and maintenance procedures for reclaimed areas following completion of the response and restoration project	January 2008
2007 Surface Water and Groundwater Monitoring Report	Results and analyses of ongoing surface water, groundwater, and moisture monitoring	February 2008
2008/2009 Work Plan	Proposed activities for 2008/2009	Draft – May 2008 Final – June 2009

This page intentionally left blank.

## 5.0 REFERENCES

- EPA 1993.** Guidance on Conducting Non-Time-Critical Removal Actions Under CERCLA. EPA/540-R-93-057. Publication 9360.0-32. Office of Emergency and Remedial Response. Washington D.C. August.
- EPA 1986.** Test Methods for Evaluating Solid Waste – Physical/Chemical Methods, SW-846.
- Maxim Technologies 2006a.** 2006/2007 Work Plan. New World Mining District Response and Restoration Project. Final. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. October.
- Maxim Technologies 2006b.** Project Summary 2006. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2006c.** New World Waste Repository Long-Term Monitoring Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. July.
- Maxim Technologies 2005a.** 2005/2006 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. July.
- Maxim Technologies 2005b.** Project Summary 2005. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2005c.** Draft Technical Memorandum – 2004 Reclamation Monitoring Results. New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. January 31.
- Maxim Technologies 2004a.** 2004/2005 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2004b.** Project Summary 2004. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2004c.** Miller Creek Response Action Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. January.
- Maxim Technologies 2003a.** 2003/2004 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. May.
- Maxim Technologies 2003b.** Project Summary 2003. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2003c.** Revised Support Document and Implementation Plan for Temporary Water Quality Standards. New World Mining District Response and Restoration Project. Prepared for USDA Forest Service, Northern Region. May 20.

- Maxim Technologies 2002a.** 2002/2003 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. July 22.
- Maxim Technologies 2002b.** Project Summary 2002. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2002c.** Progress Report, Temporary Water Quality Standards, 3-Year Review, New World Mining District Response and Restoration Project. Prepared for the USDA Forest Service. April 15.
- Maxim Technologies 2002d.** Como Basin/Glengarry Adit/Fisher Creek Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June.
- Maxim Technologies 2001a.** 2001 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. June 25.
- Maxim Technologies 2001b.** Project Summary 2001. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, August.
- Maxim Technologies 2001c.** Selective Source Response Action Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. January.
- Maxim Technologies 2001d.** McLaren Pit Response Action Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service. December.
- Maxim Technologies 2000.** 2000 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, March 10.
- Maxim Technologies 1999a.** Overall Project Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies 1999b.** 1999 Work Plan. New World Mining District Response and Restoration Project. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies 1999c.** Community Relations Plan. New World Mining District Response and Restoration Project. Appendix C of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies 1999d.** Long-Term Surface Water Quality Monitoring Plan. New World Mining District Response and Restoration Project. Appendix D of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.
- Maxim Technologies 1999e.** Long-Term Revegetation Monitoring Plan. New World Mining District Response and Restoration Project. Appendix E of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.

**Maxim Technologies 1999f.** Site-Wide Sampling and Analysis Plan. New World Mining District Response and Restoration Project. Appendix B of the Overall Project Work Plan. Final. Prepared for the USDA Forest Service, November 10.

**Montana Department of Environmental Quality (MDEQ) 2002.** Circular WQB-7 Montana Numeric Water Quality Standards, Planning, Prevention and Assistance Division, Standards and Economic Analysis Section, January.

**Stanley, D., and Maxim Technologies 1998.** Support Document and Implementation Plan. Submitted by Crown Butte Mines, Inc. in Support of Its Petition for Temporary Modification of Water Quality Standards for Selected Parameters for Fisher and Daisy Creeks and a Headwater Segment of the Stillwater River, Park County, Montana.

**Tetra Tech 2006.** Adit Discharge Engineering Evaluation/Cost Analysis. New World Mining District Response and Restoration Project. Draft. Prepared for the USDA Forest Service, Gallatin National Forest, December.