Apple Pie Stewardship Contract

Item 5 & 6

optional

KT-GT.9#

County Road 50 Hunter Walk Trail

Existing trail (5 miles) as identified on map should be mowed and cleared of down trees and/or debris to a width of 12 feet. The portion to treat is between the Paul Bunyan Bike Trail and County Road 50. Multiple passes with equipment will be necessary and use of a chainsaw may be needed. Debris should be place off the trail in the forest. The trail should be mowed to a height of 3 inches or as agreed to by inspector. Mowing should be performed on/or about August 1 to September 15 in 2016 & 2017.

The contractor shall furnish all labor, equipment, supervision, transportation, operating supplies for this project.

county 50

Apple Pie

CHIPPEWA NATIONAL FOREST www.fs.fed.us/r9/chippewa 218-547-1044

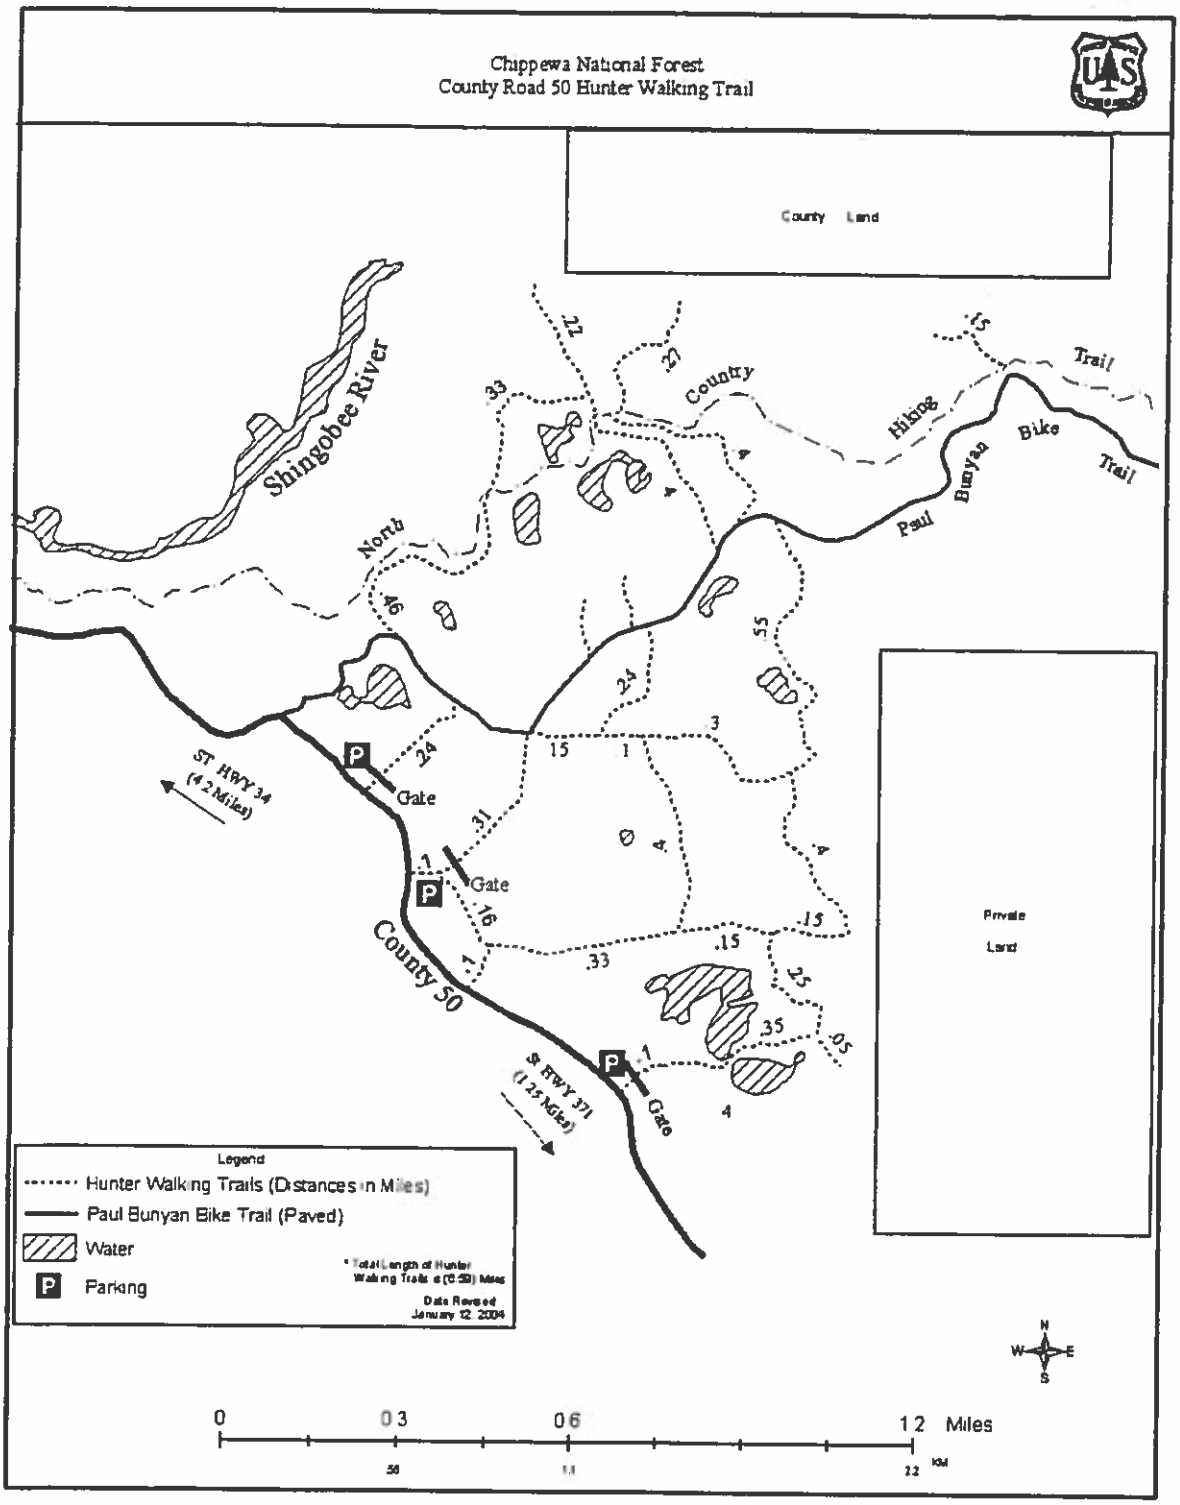

"The USDA Forest Service is an equal opportunity provider and employer"