



2022 Great American Outdoors Act Bridge Replacements

Aquatic Restoration Checklist

USDA Forest Service

Prairie City Ranger District, Malheur National Forest
Grant County, Oregon

Implementation Description

Project Information

Project Information

Category 1: Fish Passage Restoration

Category 14: Riparian Vegetative Planting

Category 2: Large Wood, Boulder, and Gravel Placement; including tree removal for large wood placement

Lead Preparer: Chase Bloom, Lindsay Davies

Location: See Table 1

Lease/ Case File/ Serial number: NA

Begin Date: 6/1/2022

Due Date: 2/1/2022

Please see <http://www.fs.usda.gov/detailfull/malheur/landmanagement/?cid=STELPRD3817723&width=full>.

Spatial Data Location:

T:\FS\NFS\Malheur\Project\AquaticRestoration2014\GIS\Implementation\PCRD\FY22\GAOAbridges

Purpose and Need

The purpose of this project is to replace three road stream crossing structures, identified in Table 1, to ensure the safe passage of vehicles over the streams, minimize road related water quality impacts, and maintain or improve fish passage through the road prism.

Table 1. Location of Bridges and Proposed work

Project Name	Stream Name	FS Road	Decimal Degrees	Location	Fish Spp. Present	Critical Habitat
FSR16-Big Creek Crossing AOP Reconstruction (Big Creek Crossing)	Big Creek	1600000	44.180, -118.6136	T16S R33.5E Sec.14 Quad: Logan Valley East	bull trout, redband trout	Bull Trout
Summit Creek Bridge Replacement – (Summit Bridge)	Summit Creek	1647000	44.1276, -118.5782	T16S R34E Sec.31 Quad: Logan Valley East	redband trout, bull trout critical habitat	Bull Trout



Bogue Gulch Bridge Replacement (Bogue Gulch Bridge)	Deardorff Creek	1300862	44.3738, -118.5167	T 14S R 35E Sec.9 Quad: Roberts Quad	bull trout, redband trout, Westslope cutthroat trout, summer steelhead,	Bull Trout, Summer Steelhead
---	-----------------	---------	--------------------	--------------------------------------	---	------------------------------

All three of these structures are in streams that are occupied by fish listed under the Endangered Species Act as Threatened (Table 1) and/or are designated Critical Habitat. Project activities are in the Big Creek (HUC 170501160101), Summit Creek (HUC 170501160105) and Deardorff Creek (HUC 170702010502) sub-watersheds.

At the Big Creek Crossing, FSR 16 crosses Big Creek on the east end of Logan Valley. The floodplain is approximately 700 feet wide, and the road has 4 culverts that catch various threads and side channels of Big Creek. All these culverts are undersized, causing the entirety of the 700-foot road segment to act as an impoundment to Big Creek, ponding water and altering its natural channel form. This impoundment results in the channel eroding the road prism at moderate and high flows. In addition, beaver regularly establish in the ponds above the road and build dams on the inlets of parallel pipe culverts catching the “main stem” of Big Creek, requiring force account repairs on a regular interval. Additionally, this crossing is considered a fish passage barrier. Unimpeded access to an additional 2.24 miles of Critical Habitat for Bull Trout could be gained if this barrier were removed.

The Summit Creek bridge was constructed in 1959 using treated timber and it has exceeded its design horizon. Several structural components have deteriorated to the point that the load rating has been reduced to only 5 tons.

The Bogue Gulch bridge over Deardorff Creek was originally constructed in 1983 & replaced in 1997 using log stringers and treated timber running planks. The bridge was closed in 2018 due to several structural failures and since that time the public has been fording Deardorff Creek around the failed bridge.

This project is needed because both Summit Bridge and Bogue Gulch Bridge are failing bridge safety standards, Bogue Gulch Bridge has fallen into such disrepair it is now being forded around by the public which is causing water quality and channel degradation, and Big Creek Crossing has altered stream hydrology and function, is a partial fish passage barrier, and requires excessive maintenance.

Land Use Plan Conformance

The project falls under Management Area (MA) 3A “Non-Anadromous Riparian Areas and 3B “Anadromous Riparian Areas” of the Malheur National Forest Land and Resource Management Plan (LRMP). The goal of MA 3A and 3B is to “Manage riparian areas to protect and enhance their value for wildlife, anadromous/resident fish habitat and water quality. Design and conduct management in all riparian areas to maintain or improve water quality and beneficial uses” (USDA Forest Service, 1990).

All three project sites are within a Category 1 Riparian Habitat Conservation Area (fish-bearing stream) as designated by PACFISH/INFISH and are listed as designated Critical Habitat for Mid-Columbia River steelhead and/or Bull Trout (Table 1).

These projects are designed to meet all requirements of the ARBOII biological opinion, and as such would improve aquatic organism habitat connectivity and stream channel processes and functions. Therefore, this project will meet the goals and objectives of the Forest Plan stated above for Management Areas 3A, 3B, and Category 1 RHCAs of PacFish/InFish.

Proposed Action and Implementation Plan

Elements Common to all Sites:

Work is expected to begin during the summer of 2023. These structures are designed following the stream simulation approach for Aquatic Organism Passage (AOP) requirements. Project activities that occur below the Ordinary High-Water Mark will occur during the instream work-window, defined by Oregon Department of Fish and Wildlife (specified below). The project footprint will encompass the existing crossing plus 500 feet on either side of the approaches and extend 300 feet upstream and downstream. All disturbed areas will be re-seeded with a seed-mix of native plant species in the late fall/early winter, and planted with riparian shrubs, in the late fall or early spring.

Specific descriptions of the work at each site are as follows:

Big Creek:

Work at this site would entail removing asphalt, fill, and existing culverts and replacing them with a 150' span pre-stressed concrete bridge over the main channel threads and a 26' span by 4' rise concrete box culvert over the overflow channel on the west side of the floodplain. Asphalt will be replaced over the crossing. In-stream work will be conducted from July 1 to Aug 31.

Any trees removed as part of the replacement would be utilized onsite. Boulders and trees immediately adjacent to the bridge installation area and within the RHCA may be tipped and utilized as part of grade reconstruction for the new bridges, or other fish habitat needs. Existing riparian hardwoods would be salvaged and utilized on site for planting.

It is expected to take between 90-120 days for all work to be completed. If the project cannot be completed in that time-frame, work will shut down in the fall and resume next summer. All in-stream work will be conducted during the in-water work window (July 1-August 31) unless an in-water variance is approved by ODFW and USFWS. This site is adjacent to the nearby Big Creek Campground. Except for approximately one week, the campground will remain open thru the duration of construction.

The 16000000 Road will be closed at the crossing site. However, traffic will be detoured around the site via the 16480000 road.

Summit Bridge:

Work at this site would entail removing the existing bridge and abutments and replacing it with a larger span structure with minor improvements made to the bridge alignment. Any trees removed as part of the replacement would be utilized onsite. Trees immediately adjacent to the bridge installation area and within the RHCA may be tipped and utilized as part of grade reconstruction for the new bridges. Existing boulders onsite would also be utilized. Existing riparian hardwoods would be salvaged and utilized on site for planting.

The approaches to the bridge would be graveled, while the bridge itself will be a concrete deck.

In-stream work will be conducted from July 1 to Aug 31. The 1647 road will be effectively closed to thru traffic near the intersection with FSR 1651 until project work is complete. The timeframe for construction is expected to be 60-90 days.

Bogue Gulch Bridge:

This project will replace the bridge and increase the span to the correct channel opening dimensions. Work at this site would entail removing the existing bridge and abutments and replacing it with a larger span structure. The crossing and approaches will be graveled. In addition, the remnants of the first-



generation bridge that was built in 1983 and left onsite when it was replaced in 1997 would also be removed and hauled off-site.

Any trees removed as part of the replacement would be utilized onsite. Trees immediately adjacent to the bridge installation area and within the RHCA may be tipped and utilized as part of grade reconstruction for the new bridges. Existing boulders onsite would also be utilized. Existing riparian hardwoods would be salvaged and utilized on site for planting. The existing user-created ford will be within the new bridge footprint. Trees and or boulders will be strategically placed to deter any additional use of this user created ford.

The 1300-862 road will be effectively closed at the intersection with FSR 13 until project work is complete. The timeframe for construction is expected to be 60-90 days. In-channel work would occur during the in-stream work window from July 15 to Aug 31.

Figures

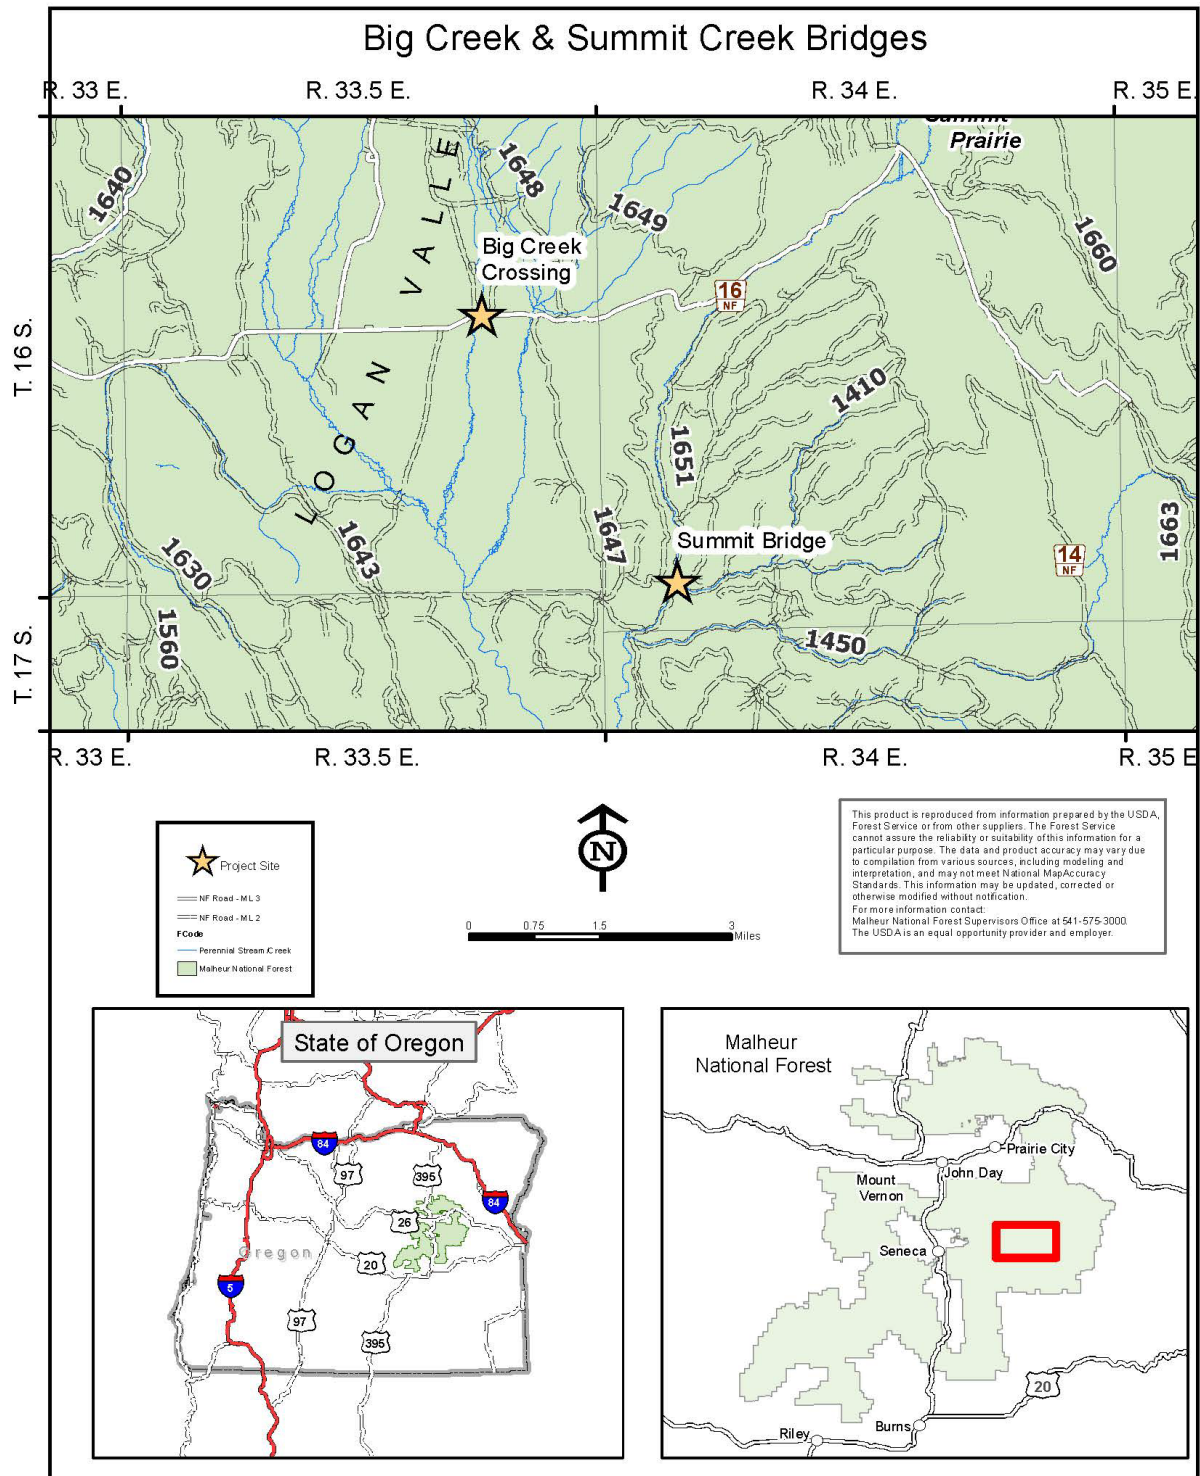


Figure 1 – FSR16-Big Creek Crossing Reconstruction & Summit Bridge Replacement Vicinity Maps.

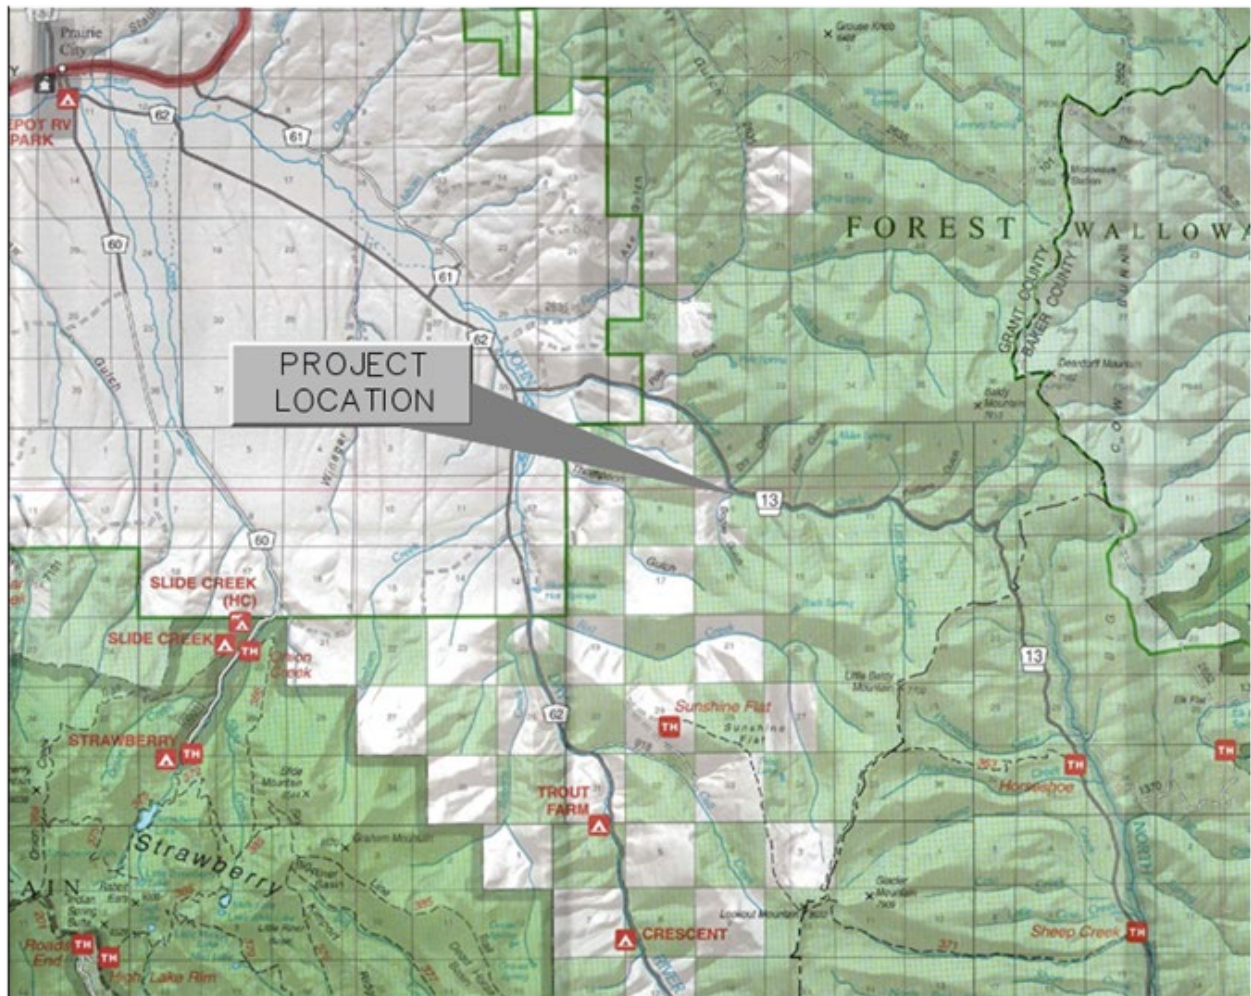


Figure 2 – Bogue Gulch Bridge Vicinity Map

FSR16-Big Creek Crossing Reconstruction



Figure 3. Big Creek crossing at FSR16. Picture on the left: View of Big Creek upstream of FSR16. Note the ponding, stagnant water. Picture on the right: View of Big Creek downstream of FSR16. Note the stream returning to its natural flow pattern and meander.

Summit Creek Bridge Replacement – FSR 1647



Figure 4. Summit Creek Bridge, looking upstream.



Figure 5. Summit Creek Bridge, looking downstream.

Bogue Gulch Bridge Replacement – FSR 1300-862



Figure 6. Bogue Gulch Bridge, looking downstream.



Figure 7. Bogue Gulch Bridge, user-created ford upstream of failed bridge.

Project Review

Malheur National Forest Aquatic Restoration Project NEPA Compliance and Implementation Checklist

Project Number: 04012023 **Date:** 1/3/2022 **Location:** See Table 1
Category: Category 1 - Fish Passage Restoration, Category 2 - Large Wood, Boulder and Gravel Placement, Category 14 - Riparian Vegetation Planting
Project Description: Replace Culverts or Failing Bridges

Heritage (to be completed by heritage specialist)

Y / N Initial

Y JP for PC Specific PDC for heritage addressed (heritage surveys; avoidance areas).

Botany (to be completed by botany specialist)

Y / N Initial

Y AH Specific PDC for botany addressed (sensitive plant surveys).

Y AH Specific PDC for noxious weeds addressed.

Land Management Consistency (is the proposed project within the management area? Check yes or no. If yes, comments should indicate whether proposed actions are consistent with the standards for the management area.)

Y / N Initial

N LD 4A big game winter range

N LD 6A and 6B wilderness

N LD 7 scenic area

N LD 8 special interest areas

Y / N Initial

N LD 9 research natural areas

N LD 10 semi-primitive non-motorized recreation areas

N LD 22/22A wild and scenic river

N LD inventoried roadless areas

Comments: [Click here to enter additional comments.](#)

I have reviewed this project and have determined it is compliant with the Malheur Forest Plan and Aquatic Restoration environmental assessment project design criteria identified for my resource.

Resource	Signature	Date	Comments (additional PDCs may be noted if necessary) *May continue on
Heritage	<u>/s/ Janet Plocharsky for Pete Cadena via Email on March 3, 2023</u>	3/3/2023	a monitor will be present during ground disturbing activities or pre-implementation inspection. Tribal consultation occurred on February 24, 2022 to CTUIR, CTWS, BPT.
Botany	<u>/s/Amanda Hardman</u>	1/20/2022	<u>Click here to enter comments</u>
Invasive Plants	<u>/s/Amanda Hardman</u>	1/20/2022	Work with botanist to plan revegetation post soil disturbance
Wildlife	<u>/s/ Dustin Hollowell</u>	2/15/2022	No additional comments or concerns.
Fish*	<u>/s/ Lindsay Davies</u>	1/18/2022	No Comments, fits ARBOII and Aquatic EA requirements
Hydrology*	<u>/s/ Tom Friedrichsen</u>	1/20/2022	No additional comments. Ensure PDC's and requirements of the Malheur Aquatic Restoration EA and ARBOII are implemented.
Range	<u>Michael Spicer</u>	3/18/2022	See comments under "Grazing".
Soils	<u>/s/ Leslee Crawford</u>	1/19/2022	Ensure the PDCs for soils described in the Aquatic Restoration EA are followed as well as the following: <ul style="list-style-type: none"> - Avoid heavy machinery travel on slopes steeper than 35%, where feasible. - No heavy equipment shall be allowed on highly erodible soil. "Highly erodible soil" generally means areas larger than 50 feet diameter, and either 1) steeper than 30%, with <75% ground cover, (2) 20-30% slope with < 50% ground cover, (3) 10-19 % slope with <25% ground cover, or (4) with signs of current erosion, such as predestaling or rilling. - Tree-tipping or removal for LWD projects – on areas where existing skid trails spaced 100-140 feet apart can be reused, reuse old skids. Otherwise, space HMT travel ways 120 feet apart where practical, using existing skid trails where possible and appropriate. Travel ways ("trails") should average < 14 feet wide. - Low ground pressure equipment (< 8.5 psi) can be allowed off trails on dry soil. For soil protection practices "dry" means July – September, or obviously dry in 6 of top 10 inches in other months. - Tree tipping trails shall be covered with slash to reduce runoff and erosion. A copy of this guidance developed for the Malheur is available from soil scientist.
Recreation	<u>Roy L. Walker</u>	1/18/2022	<u>See additional PDC in recreation section</u>
Special Uses	<u>/s/Stacia Kimbell</u>	1/19/2022	Currently no Forest authorized lands special use conflicts identified. Two diversions identified thru the OWRD water-rights website (https://apps.wrd.state.or.us/apps/gis/wr/Default.aspx) located within the project areas of FSR-16 Big Creek Crossing AOP Reconstruction and Bogue Gulch Bridge Replacement. Project lead(s) to pre-coordinate directly with OWRD to ensure projects can proceed as proposed without adverse impacts to water rights/diversions. Verify no new lands special uses prior to project implementation.

Lands	<u>/s/Stacia Kimbell</u>	1/19/2022	Ensure National Forest Boundary Line Policy (attached) is reviewed prior to project implementation and adjacent landowners are adequately notified, specifically for FSR-16 Big Creek Crossing AOP Reconstruction. Project lead(s) to work directly with Tri-Forest Lands Survey (Robert Moyers) for Forest Boundary verification pre-implementation. Ensure project proposal is utilizing maps illustrating accurate Forest boundaries.
Mining	<u>/s/Hannah Grist</u>	1/25/2022	No mine claims will be effected. Report any mineral material use (quantity and type) to Hannah Grist when project is completed.
Engineering	<u>/s/Matthew Smith</u>	1/18/2022	Road closures and detours will need to be routed through Law Enforcement, Public affairs, and neighboring agencies such as Grant County Road Department. The engineering group is aware of these needs and has plans to implement prior to construction.
Fuels / Fire	<u>/s/Sarah Bush</u>	1/18/2022	<u>Click here to enter comments</u>
Silviculture	<u>/s/Lori Stokes</u>	2/7/2022	Ensure trees for large wood are from currently stocked stands.

* Ensure that an experienced fisheries biologist or hydrologist is involved in the design of all projects covered by Aquatic Restoration Biological Opinion II. The experience should be commensurate with technical requirements of a project.

Environmental Coordinator: /s/Janet Plocharsky Date: 3/3/2023

Line Officer Signature: /s/Sarah E Bush, Acting DR Date: 3/24/2023

Appendix to the Aquatic Restoration EA/

Implementation Description

Project name: 2022 Great American Outdoors Act Bridge Replacements

Project number: 04012023

Category 1: Fish Passage Restoration

Category 2: Large Wood, Boulder, and Gravel Placement; including tree removal for large wood placement

Category 14: Riparian Vegetative Planting

The following information will guide actions for this project that is taking place within the bounds of the Decision Notice for the 2014 Malheur National Forest Aquatic Restoration Environmental Analysis to maintain that all conservation measures, guidelines, and project design criteria are met under this guiding document.

Much of the information below is reproduced from the Decision Notice for Aquatic Restoration Project Appendix A (pages 7 through 44) and may cite project design criteria (PDC) numbers, literature, or other documents not referenced further in this proposal document. Please refer to the Decision Notice for more information.

Program Administration

1. Integration of project design criteria and conservation measures and terms and conditions into project design and contract language
 - a. This document is to outline the conservation measures and PDCs that will be used during project implementation to remain compliant with the aquatic restoration biological assessment as well as ARBO II.
2. Project notification: The following information will be provided to the National Marine Fisheries Service (NMFS) Level 1 aquatics members 30 days prior to implementation as a Project Notification Form 7.
 - a. Project name – 2022 Great American Outdoors Act Bridge Replacements
 - b. Location – See Figure 1, Table 1
 - c. Agency contact – Chase Bloom, chase.bloom@usda.gov
 - d. Timing – Work will occur during 2023 and 2024, with instream work happening between July 15 to August 31 on Deardorff Creek and July 1 to August 31 on Summit and Big Creeks. Enter end date
 - e. Activity category – 1

Category 1: Fish Passage Restoration

Category 2: Large Wood, Boulder, and Gravel Placement; including tree removal for large wood placement

Category 14: Riparian Vegetative Planting

- f. Project description – Project description is available in the Proposed Action and Implementation Plan section above.
- g. Species affected –

- i. Listed species: Mid-Columbia River steelhead (Deardorff), Columbia River Bull Trout (all)
 - ii. Critical Habitat: Yes
 - iii. MIS Species: Yes – Steelhead, Westslope cutthroat trout, redband trout.
 - h. Date of submittal – To be completed in Summer of 2023, at least 60 days prior to implementation
 - i. Site assessments – Assessment for contaminants is not required at these locations.
 - j. Review – NMFS fish passage review and Restoration Review Team review are not required.
 - k. Verification – [Click here to enter text.](#)
 - l. SOD project notification – [Click here to enter text.](#)
- 3. Minor Variance: May potentially submit for timing variance.
- 4. NMFS Fish Passage Review and Approval: This work does not require review by the NFMS level 1 team member.
- 5. Restoration Review Team: This work does not require review by the restoration review team.
- 6. Project Completion Report: To be completed after implementation
- 7. Annual Program Report: This project will be completed within 2 years, completion and annual reporting will occur in the winter of FY24 before February 15th.

General Aquatic Conservation Measures

- 8. **Technical skill and planning requirements:**
 - a. An appropriately qualified fisheries biologist or hydrologist will be involved in the design of this project.
 - b. The scope of this project is limited in both space and context. Field evaluations and site-specific surveys will require little work. Appropriate time will be allotted for these actions, prior to implementation. Planning and design will involve appropriate expertise.
 - c. The assigned fisheries biologist or hydrologist will make sure that any applicable conservation measures and project design criteria are met through the contracting process.
- 9. **Climate change:** due to the small scale of this work, future climate changes impacts will not have dramatic effects on this work
- 10. **In-water work period:** In-stream activities will occur between July 15th and August 15th.
- 11. **Fish passage:** Not applicable.
- 12. **Site assessment for contaminants:** In developed or previously developed sites, such as areas with past dredge mines, or sites with known or suspected contamination, a site assessment for contaminants will be conducted on projects that involve excavation of greater than 20 cubic yards of material. The action agencies will complete a site assessment to identify the type, quantity, and extent of any potential contamination. The level of detail and resources committed to such an assessment will be commensurate with the level and type of past or current development at the site. The assessment may include the following:
 - a. Review of readily available records, such as former site use, building plans, records of any prior contamination events.
 - b. Site visit to observe the areas used for various industrial processes and the condition of the property.
 - c. Interviews with knowledgeable people, such as site owners, operators, occupants, neighbors, local government officials, etc.
 - d. Report that includes an assessment of the likelihood that contaminants are present at site.
- 13. **Pollution and erosion control measures:** Implement the following pollution and erosion control measures:

- a. **Project contact:** Identify a project contact (name, phone number, an address) that will be responsible for implementing pollution and erosion control measures.
- b. List and describe any hazardous material that would be used at the project site, including procedures for inventory, storage, handling, and monitoring; notification procedures; specific clean-up and disposal instructions for different products available on the site; proposed methods for disposal of spilled material; and employee training for spill containment.
- c. Temporarily store any waste liquids generated at the staging areas under cover on an impervious surface, such as tarpaulins, until such time they can be properly transported to and treated at an approved facility for treatment of hazardous materials.
- d. Procedures based on best management practices to confine, remove, and dispose of construction waste, including every type of debris, discharge water, concrete, cement, grout, washout facility, welding slag, petroleum product, or other hazardous materials generated, used, or stored on-site.
- e. Procedures to contain and control a spill of any hazardous material generated, used or stored on-site, including notification of proper authorities. Ensure that materials for emergency erosion and hazardous materials control are onsite (for example, silt fence, straw bales, oil-absorbing floating boom whenever surface water is present).
- f. Best management practices to confine vegetation and soil disturbance to the minimum area, and minimum length of time, as necessary to complete the action, and otherwise prevent or minimize erosion associated with the action area.
- g. No uncured concrete or form materials will be allowed to enter the active stream channel.
- h. Steps to cease work under high flows, except for efforts to avoid or minimize resource damage.

14. Site preparation:

- a. **Flagging sensitive areas:** Prior to construction, clearly mark critical riparian vegetation areas, wetlands, and other sensitive sites to minimize ground disturbance.
- b. **Staging area:** Establish staging areas for storage of vehicles, equipment, and fuels to minimize erosion into or contamination of streams and floodplains.
 - i. No topographical restrictions: Place staging area 150 feet or more from any natural water body or wetland in areas where topography does not restrict such a distance.
 - ii. Topographical restrictions: Place staging area away from any natural water body or wetland to the greatest extent possible in areas with high topographical restriction, such as constricted valley types.
- c. **Temporary erosion controls:** Place sediment barriers prior to construction around sites where significant levels of erosion may enter the stream directly or through road ditches. Temporary erosion controls will be in place before any significant alteration of the action site and will be removed once the site has been stabilized following construction activities.
- d. **Stockpile materials:** Minimize clearing and grubbing activities when preparing staging, project, or stockpile areas. Any large wood, topsoil, and native channel material displaced by construction will be stockpiled for use during site restoration. Materials used for implementation of aquatic restoration categories (for example, large wood, boulders, and fencing material) may be staged within the 100-year floodplain.
- e. **Hazard trees:** Where appropriate, include hazard tree removal (amount and type) in project design. Fell hazard trees when they pose a safety risk. If possible, fell hazard trees within riparian areas towards a stream. Keep felled trees on site when needed to meet coarse large wood objectives.

15. Heavy equipment use:

- a. **Choice of equipment:** Heavy equipment will be commensurate with the project and operated in a manner that minimizes adverse effects to the environment (for example, minimally-sized, low pressure tires, minimal hard turn paths for tracked vehicles, or temporary mats or plates within wet areas or sensitive soils).
- b. **Fueling and cleaning and inspection for petroleum products and invasive weeds:**
 - i. All equipment used for instream work will be cleaned for petroleum accumulations, dirt, plant material (to prevent the spread of noxious weeds), and leaks repaired prior to entering the project area. Such equipment includes large machinery, stationary power equipment (for example, generators and canes), and gas-powered equipment with tanks larger than 5 gallons.
 - ii. Store and fuel equipment in staging areas after daily use.
 - iii. Inspect daily for fluid leaks before leaving the vehicle staging area for operation.
 - iv. Thoroughly clean equipment before operation below ordinary high water or within 50 feet of any natural water body or areas that drain directly to streams or wetlands and as often as necessary during operation to remain grease free.
- c. **Temporary access roads:** Existing roadways will be used whenever possible. Minimize the number of temporary access roads and travel paths to lessen soil disturbance and compaction and impacts to vegetation. Temporary access roads will not be built on slopes where grade, soil, or other features suggest a likelihood of excessive erosion or failure. When necessary, temporary access roads will be obliterated or revegetated. Temporary roads in wet or flooded areas will be restored by the end of the applicable in-water work period. Construction of new permanent roads is not permitted.
- d. **Stream crossings:** Minimize number and length of stream crossings. Such crossings will be at right angles and avoid potential spawning areas to the greatest extent possible. Stream crossings shall not increase the risk of channel re-routing at low and high water conditions. After project completion, temporary stream crossings will be abandoned and the stream channel and banks restored.
- e. **Work from top of bank:** To the extent feasible, heavy equipment will work from the top of the bank, unless work instream would result in less damage to the aquatic ecosystem.
- f. **Timely completion:** Minimize time in which heavy equipment is in stream channels, riparian areas, and wetlands. Complete earthwork (including drilling, excavation, dredging, filling and compacting) as quickly as possible. During excavation, stockpile native streambed materials above the bankfull elevation, where it cannot reenter the stream, for later use.

16. Site Restoration:

- a. **Initiate rehabilitation:** Upon project completion, rehabilitate all disturbed areas in a manner that results in similar or better than pre-work conditions through removal of project related waste, spreading of stockpiled materials (soil, large wood, trees, etc.) seeding, or planting with local native seed mixes or plants.
- b. **Short-term stabilization:** Measures may include the use of non-native sterile seed mix (when native seeds are not available), weed-free certified straw, jute matting, and other similar techniques. Short-term stabilization measures will be maintained until permanent erosion control measures are effective. Stabilization measures will be instigated within three days of construction completion.
- c. **Revegetation:** Replant each area requiring revegetation prior to or at the beginning of the first growing season following construction. Achieve reestablishment of vegetation in disturbed areas to at least 70 percent of pre-project levels within three years. Use an appropriate mix of species that will achieve establishment and erosion control objectives, preferably forb, grass, shrub, or tree species native to the project area or region and

appropriate to the site. Barriers will be installed as necessary to prevent access to revegetated sites by livestock or unauthorized persons.

- d. **Planting manuals:** All riparian plantings shall follow Forest Service direction described in the Regional letter to Units, Use of Native and Nonnative Plants on National Forests and Grasslands May 2006 (Final Draft), and/or Bureau of Land Management (BLM) Instruction Memorandum No. OR-2001-014, Policy on the Use of Native Species Plant Material.
 - e. **Decompact soils:** Decompact soil by scarifying the soil surface of roads and paths, stream crossings, staging, and stockpile areas so that seeds and plantings can root.
17. **Monitoring:** Monitoring will be conducted by action agency staff, as appropriate for that project, during and after a project to track effects and compliance with this opinion.
- a. **Implementation:**
 - i. Visually monitor during project implementation to ensure effects are not greater (amount, extent) than anticipated and to contact Level 1 representatives if problems arise.
 - ii. Fix any problems that arise during project implementation.
 - iii. Regular biologist/hydrologist coordination if biologist/hydrologist is not always on site to ensure contractor is following all stipulations.
 - b. **401 Certification:** To minimize short-term degradation to water quality during project implementation, follow current 401 Certification provisions of the Federal Clean Water Act for maintenance or water quality standards described by the following: Oregon Department of Environmental Quality (Oregon BLM, Forest Service, and BIA); Washington Department of Ecology (Washington BLM); and the Memorandum of Understanding between the Washington Department of Fish and Wildlife (WDFW) and Forest Service regarding Hydraulic Projects Conducted by Forest Service, Pacific Northwest Region (WDFW and USDA-Forest Service 2012); California, Idaho, or Nevada 401 Certification protocols (BLM and Forest Service).
 - c. **Post project:** A post-project review shall be conducted after winter and spring high flows.
 - i. For each project, conduct a walk through/visual observation to determine if there are post-project affects that were not considered during consultation. For fish passage and revegetation projects, monitor in the following manner:
 - ii. Fish Passage Projects: Note any problems with channel scour or bedload deposition, substrate, discontinuous flow, vegetation establishment, or invasive plant infestation.
 - iii. Revegetation: For all plant treatment projects, including site restoration, monitor for and remove invasive plants until native plants become established.
 - iv. In cases where remedial action is required, such actions are permitted without additional consultation if they use relevant PDC and aquatic conservation measures and the effects of the action categories are not exceeded.
18. **Work Area Isolation, Surface Water Withdrawals, and Fish Capture and Release:** Isolate the construction area and remove fish from a project site for projects that include concentrated and major excavation at a single location within the stream channel. This condition will typically apply to the following aquatic restoration categories: Fish Passage Restoration; Dam, Tidegate, and Legacy Structure Removal; and Channel Reconstruction/Relocation.
- a. **Isolate capture area:** Install block nets at up and downstream locations outside of the construction zone to exclude fish from entering the project area. Leave nets secured to the stream channel bed and banks until construction activities within the stream channel are complete. If block nets or traps remain in place more than one day, monitor the nets or

- traps at least on a daily basis to ensure they are secured to the banks and free of organic accumulation and to minimize fish predation in the trap.
- b. **Capture and release:** Fish trapped within the isolated work area will be captured and released as prudent to minimize the risk of injury, then released at a safe release site, preferably upstream of the isolated reach in a pool or other area that provides cover and flow refuge. Collect fish in the best manner to minimize potential stranding and stress by seine or dip nets as the area is slowly dewatered, baited minnow traps placed overnight, or electrofishing (if other options are ineffective). Fish must be handled with extreme care and kept in water the maximum extent possible during transfer procedures. A healthy environment for the stressed fish shall be provided—large buckets (five-gallon minimum to prevent overcrowding) and minimal handling of fish. Place large fish in buckets separate from smaller prey-sized fish. Monitor water temperature in buckets and well-being of captured fish. If buckets are not being immediately transported, use aerators to maintain water quality. As rapidly as possible, but after fish have recovered, release fish. In cases where the stream is intermittent upstream, release fish in downstream areas and away from the influence of the construction. Capture and release will be supervised by a fishery biologist experienced with work area isolation and safe handling of all fish.
 - c. **Electrofishing:** Use electrofishing only where other means of fish capture may not be feasible or effective. If electrofishing will be used to capture fish for salvage, NMFS’s electrofishing guidelines will be followed (NMFS 2000).
 - i. Reasonable effort should be made to avoid handling fish in warm water temperatures, such as conducting fish evacuation first thing in the morning, when the water temperature would likely be coolest. No electrofishing should occur when water temperatures are above 18 °C or are expected to rise above this temperature prior to concluding the fish capture.
 - ii. If fish are observed spawning during the in-water work period, electrofishing shall not be conducted in the vicinity of spawning fish or active redds.
 - iii. Only direct current (DC) or pulsed direct current shall be used.
 - iv. Conductivity less than 100, use voltage ranges from 900 to 1100. Conductivity from 100 to 300, use voltage ranges from 500 to 800. Conductivity greater than 300, use voltage to 400.
 - v. Begin electrofishing with minimum pulse width and recommended voltage and then gradually increase to the point where fish are immobilized and captured. Turn off current once fish are immobilized.
 - vi. Do not allow fish to come into contact with anode. Do not electrofish an area for an extended period of time. Remove fish immediately from water and handle as described above (PDC 20b). Dark bands on the fish indicate injury, suggesting a reduction in voltage and pulse width and longer recovery time.
 - vii. If mortality is occurring during salvage, immediately discontinue salvage operations (unless this would result in additional fish mortality), reevaluate the current procedures, and adjust or postpone procedures to reduce mortality.
 - d. **Dewater construction site:** When dewatering is necessary to protect species or critical habitat, divert flow around the construction site with a coffer dam (built with non-erosive materials), taking care to not dewater downstream channels during dewatering. Pass flow and fish downstream with a by-pass culvert or a water-proof lined diversion ditch. Diversion sandbags can be filled with material mined from the floodplain as long as such material is replaced at end of project. Small amounts of instream material can be moved to help seal and secure diversion structures. If Endangered Species Act (ESA) listed-fish may be present and pumps are required to dewater, the intake must have a fish screen(s) and be operated in accordance with NMFS fish screen criteria described below (in part e.iv) of this section. Dissipate flow energy at the bypass outflow to prevent damage to

riparian vegetation or stream channel. If diversion allows for downstream fish passage, place diversion outlet in a location to promote safe reentry of fish into the stream channel, preferably into pool habitat with cover. Pump seepage water from the de-watered work area to a temporary storage and treatment site or into upland areas and allow water to filter through vegetation prior to reentering the stream channel.

e. Surface water withdrawals:

- i. Surface water may be diverted to meet construction needs, but only if developed sources are unavailable or inadequate. Where ESA-listed fish may be present, diversions may not exceed 10 percent of the available flow and fish screen(s) will be installed, operated, and maintained according to NMFS’s fish screen criteria (NMFS 2011e).
- ii. For the dewatering of a work site to remove or install culverts, bridge abutments etc., if ESA-listed fish may be present, a fish screen that meets criteria specified by NMFS (2011e) must be used on the intake to avoid juvenile fish entrainment. If ESA-listed salmon, steelhead, eulachon, or green sturgeon may be present, the action agencies will ensure that the fish screen design is reviewed and approved by NMFS for consistency with NMFS (2011e) criteria if the diversion (gravity or pump) is at a rate greater than 3 cubic feet per second (cfs). NMFS approved fish screens have the following specifications: (1) An automated cleaning device with a minimum effective surface area of 2.5 square feet per cfs, and a nominal maximum approach velocity of 0.4 feet per second (fps), or no automated cleaning device, a minimum effective surface area of 1 square foot per cfs, and a nominal maximum approach rate of 0.2 fps; and (2) a round or square screen mesh that is no larger than 2.38 mm (0.094 inches) in the narrow dimension, or any other shape that is no larger than 1.75 mm (0.069 inches) in the narrow dimension.

- f. **Stream re-watering:** Upon project completion, slowly re-water the construction site to prevent loss of surface water downstream as the construction site streambed absorbs water and to prevent a sudden release of suspended sediment. Monitor downstream during re-watering to prevent stranding of aquatic organisms below the construction site.

Applicable Project Design Criteria

Project Design Criteria for Aquatic Restoration Activity Categories

1. Fish Passage Restoration

Fish passage restoration includes the following: total removal of culverts or bridges, or replacing culverts or bridges with properly sized culverts and bridges, replacing a damaged culvert or bridge, and resetting an existing culvert that was improperly installed or damaged; stabilizing and providing passage over headcuts; removing, constructing (including relocations), repairing, or maintaining fish ladders; and constructing or replacing fish screens for irrigation diversions. Such projects will take place where fish passage has been partially or completely eliminated through road construction, stream degradation, creation of small dams and weirs, and irrigation diversions. Equipment such as excavators, bulldozers, dump trucks, front-end loaders, and similar equipment may be used to implement projects.

a. Stream simulation culvert and bridge projects: All road-stream crossing structures shall simulate stream channel conditions per *Stream Simulation: An Ecological Approach to Providing Passage for Aquatic Organisms at Road- Stream Crossings* (USDA-Forest Service 2008), located at:

http://stream.fs.fed.us/fishxing/aop_pdfs.html.

- i. **Culvert criteria:** Within the considerations of stream simulation, the structure shall, at a minimum, accommodate a bankfull wide channel plus constructed banks to provide for passage

of all life stages of native fish species (for more information, reference Chapter 6, page 35 of the USFS Stream Simulation Guide). The following crossing-width guidance applies to specific ranges of entrenchment ratios as defined by Rosgen (1996):

1. Non-entrenched Streams: If a stream is not fully entrenched (entrenchment ratio of greater than 1.4), the minimum culvert width shall be at least 1.3 times the bankfull channel width. This is consistent with *Anadromous Salmonid Passage Facility Design* (section 7.4.2 “Stream Simulation Design”) (NMFS 2011e). However, if the appropriate structure width is determined to be less than 1.3 times the bankfull channel width, processes for variances are listed in “iv” and “v” below.
 2. Entrenched Streams: If a stream is entrenched (entrenchment ratio of less than 1.4), the culvert width must be greater than bankfull channel width, allow sufficient vertical clearance to allow ease of construction and maintenance activities, and provide adequate room for the construction of natural channel banks. Consideration should be given to accommodate the floodprone width. Floodprone width is the width measured at twice the maximum bankfull depth (Rosgen 1996).
- ii. **Bridge design:**
1. Bridges with vertical abutments, including concrete box culverts, which are constructed as bridges, shall have channel widths that are designed using the culvert criteria (PDC 21a-i above). This opinion does not cover bridges that require pile driving within a wetted stream channels.
 2. Primary structural elements must be concrete, metal, fiberglass, or untreated timber. Concrete must be sufficiently cured or dried before coming into contact with stream flow.
 3. Riprap must not be placed within the bankfull width of the stream. Riprap may only be placed below bankfull height when necessary for protection of abutments and pilings. However, the amount and placement of riprap should not constrict the bankfull flow.
- iii. **Crossing design:**
1. Crossings shall be designed using an interdisciplinary design team consisting of an experienced engineer, fisheries biologist, and hydrologist/geomorphologist.
 2. Forest Service crossing structures wider than 20 feet or with costs that exceed \$100,000 shall be reviewed by the USDA-Forest Service, Region 6, aquatic organism passage design assistance team.
 3. At least one member of the design team shall be trained in a weeklong aquatic organism passage course based Stream Simulation: An Ecological Approach to Providing Passage for Aquatic Organisms at Road-Stream Crossings (USDA-Forest Service 2008).
 4. Bankfull width shall be based on the upper end of the distribution of bankfull width measurements as measured in the reference reach to account for channel variability and dynamics.
- iv. **NMFS fish passage review and approve:** If the structure width is determined to be less than the established width criteria as defined above, a variance must be requested from NMFS for consistency with criteria in NMFS (2011e).
- v. **Opportunity for individual consultation:** The action agencies have a legal duty under the ESA to consult with NMFS and U.S. Fish and Wildlife Service (USFWS) on a project-specific basis if they prefer to operate outside the conditions in this opinion. The standards provided in this document are conservative for the purpose of this programmatic and may or may not be applicable to projects that undergo individual Level 1 Consultation. The standards in ARBO II are not new defaults to be used universally outside the programmatic arena.

2. Large Wood, Boulder, and Gravel Placement

Large wood, boulder, and gravel placement includes large wood and boulder placement, engineered log jams, porous boulder structures and vanes, gravel placement, and tree removal for large wood projects. Such activities will occur in areas where channel structure is lacking due to past stream cleaning (large wood removal), riparian timber harvest, and in areas where natural gravel supplies are low due to anthropogenic disruptions. These projects will occur in stream channels and adjacent floodplains to increase channel stability, rearing habitat, pool formation, spawning gravel deposition, channel complexity, hiding cover, low velocity areas, and floodplain function. Equipment such as helicopters, excavators, dump trucks, front-end loaders, full-suspension yarders, and similar equipment may be used to implement projects.

a. Large wood and boulder projects:

- i. Place large wood and boulders in areas where they would naturally occur and in a manner that closely mimics natural accumulations for that particular stream type. For example, boulder placement may not be appropriate in low-gradient meadow streams.
- ii. Structure types shall simulate disturbance events to the greatest degree possible and include, but are not limited to, log jams, debris flows, windthrow, and tree breakage.
- iii. No limits are to be placed on the size or shape of structures as long as such structures are within the range of natural variability of a given location and do not block fish passage.
- iv. Projects can include grade control and bank stabilization structures, while size and configuration of such structures will be commensurate with scale of project site and hydraulic forces.
- v. The partial burial of large wood and boulders is permitted and may constitute the dominant means of placement. This applies to all stream systems but more so for larger stream systems where use of adjacent riparian trees or channel features is not feasible or does not provide the full stability desired.
- vi. Large wood includes whole conifer and hardwood trees, logs, and rootwads. Large wood size (diameter and length) should account for bankfull width and stream discharge rates. When available, trees with rootwads should be a minimum of 1.5 times bankfull channel width, while logs without rootwads should be a minimum of 2.0 times bankfull width.
- vii. Structures may partially or completely span stream channels or be positioned along stream banks.
- viii. Stabilizing or key pieces of large wood must be intact, hard, with little decay, and if possible have root wads (untrimmed) to provide functional refugia habitat for fish. Consider orienting key pieces such that the hydraulic forces upon the large wood increases stability.
- ix. Anchoring large wood – Anchoring alternatives may be used in preferential order:
 1. Use of adequate sized wood sufficient for stability
 2. Orient and place wood in such a way that movement is limited
 3. Ballast (gravel or rock) to increase the mass of the structure to resist movement
 4. Use of large boulders as anchor points for the large wood
 5. Pin large wood with rebar to large rock to increase its weight. For streams that are entrenched (Rosgen F, G, A, and potentially B) or for other streams with very low width to depth ratios (less than 12) an additional 60 percent ballast weight may be necessary due to greater flow depths and higher velocities.

c. Porous boulder structures and vanes:

- i. Full channel-spanning boulder structures are to be installed only in highly uniform, incised, bedrock-dominated channels to enhance or provide fish habitat in stream reaches where log placements are not practicable due to channel conditions (not feasible to place logs of sufficient length, bedrock-dominated channels, deeply-incised channels, artificially constrained reaches,

etc.), where damage to infrastructure on public or private lands is of concern, or where private landowners will not allow log placements due to concerns about damage to their streambanks or property.

- ii. Install boulder structures low in relation to channel dimensions so that they are completely overtopped during channel-forming flow events (approximately a 1.5-year flow event).
- iii. Boulder step structures are to be placed diagonally across the channel or in more traditional upstream pointing “V” or “U” configurations with the apex oriented upstream.
- iv. Boulder step structures are to be constructed to allow upstream and downstream passage of all native fish species and life stages that occur in the stream. Plunges shall be kept less than 6 inches in height.
- v. The use of gabions, cable, or other means to prevent the movement of individual boulders in a boulder step structure is not allowed.
- vi. Rock for boulder step structures shall be durable and of suitable quality to assure long-term stability in the climate in which it is to be used. Rock sizing depends on the size of the stream, maximum depth of flow, planform, entrenchment, and ice and debris loading.
- vii. The project designer or an inspector experienced in these structures should be present during installation.
- viii. Full spanning boulder step structure placement should be coupled with measures to improve habitat complexity and protection of riparian areas to provide long-term inputs of large wood.

e. Tree removal for large wood projects:

- i. Live conifers and other trees can be felled or pulled/pushed over in a Northwest Forest Plan (USDA and USDI 1994a) Riparian Reserve or PACFISH/INFISH (USDA-Forest Service 1995 ; USDA and USDI 1994b) riparian habitat conservation areas (RHCA), and upland areas (for example, late successional reserves or adaptive management areas for northern spotted owl and marbled murrelet critical habitat) for in-channel large wood placement only when conifers and trees are fully stocked. Tree felling shall not create excessive stream bank erosion or increase the likelihood of channel avulsion during high flows.
- ii. Danger trees and trees killed through fire, insects, disease, blow-down and other means can be felled and used for in-channel placement regardless of live-tree stocking levels.
- iii. Trees may be removed by cable, ground-based equipment, horses or helicopters.
- iv. Trees may be felled or pushed/pulled directly into a stream or floodplain.
- v. Trees may be stock piled for future instream restoration projects.
- vi. The project manager for an aquatic restoration action will coordinate with an action-agency wildlife biologist in tree-removal planning efforts.

14. Riparian Vegetation Planting

Riparian vegetation planting includes the planting of native riparian species that would occur under natural disturbance regimes. Activities may include the following: planting conifers, deciduous trees, and shrubs; placement of sedge, rush mats, or both; and gathering and planting willow cuttings. The resulting benefits to the aquatic system can include desired levels of stream shade, bank stability, stream nutrients, large wood inputs, increased grasses, forbs, and shrubs, and reduced soil erosion. Equipment may include excavators, backhoes, dump trucks, power augers, chainsaws, and manual tools.

- a. Experienced silviculturists, botanists, ecologists, or associated technicians shall be involved in designing vegetation treatments.
- b. Species to be planted will be of the same species that naturally occur in the project area. Acquire native seed or plant sources as close to the watershed as possible.

- c. Tree and shrub species, willow cuttings, as well as sedge and rush mats to be used as transplant material shall come from outside the bankfull width, typically in terraces (abandoned flood plains), or where such plants are abundant.
- d. Sedge and rush mats should be sized to prevent their movement during high flow events.
- e. Concentrate plantings above the bankfull elevation.
- f. Removal of native and non-native vegetation that will compete with plantings is permitted.
- g. Exclosure fencing to prevent utilization of plantings by deer, elk, and livestock is permitted.

Project Design Criteria by Resource

Fisheries and Hydrology

Fisheries and hydrology resources will follow all mitigation measures and project design criteria for aquatic restoration activities as shown in the ‘Aquatic Restoration Project Categories, Program Administration, General Aquatic Conservation Measures, and Project Design Criteria for Aquatic Restoration Activity Categories on the Malheur National Forest.’

Additional Aquatic project design criteria were developed for the following elements: tree tipping and felling, juniper treatments, tree hauling, and prescribed burning.

General For Inside Riparian Habitat Conservation Areas

All snags will be maintained within the RHCA unless deemed a hazard to the restoration activity.

Tree Tipping and Tree Felling for Large Wood Projects

Source trees being extracted (either by tipping or felling) as part of this project for instream restoration will not be harvested from within the primary shade zone.

Table 2. Primary shade zone width slope distance (feet), based on adjacent hillslope (percent)

Hillslope less than 30 percent	Hillslope 30 to 60 percent	Hillslope greater than 30 percent
50 feet	55 feet	60 feet

The Temperature Implementation Strategies allow the distances in the above table to be less (but not less than 25 feet.) if any of the following conditions applies:

- The trees are located on a south facing slope (175 to 185 degree azimuth) and therefore do not provide stream shade;
- An appropriate level of analysis is completed and documented, such as shade modeling, using site-specific characteristics to determine the primary shade tree width; and/or
- Field monitoring or measurements are completed to determine the width where optimum angular canopy density (65 percent or greater) is achieved (see TMDL Implementation Strategies).
- If trees are being felled for safety reasons they can be felled towards the stream.
- Source trees should come from but are not limited to: over or fully stocked upland and riparian stands, hazard trees, trees generated from administrative sites (maintenance, expansion, or new construction), and hardwood restoration.

There is no DBH (diameter at breast height) restriction for large wood, but consider the following before removing and placing trees:

Diameter:

- The key to establishing a logjam is utilizing larger diameter wood that resists decay. These pieces of wood are often called “key pieces,” and serve as the anchors for the logjam structure. Wood

can improve fish habitat only if the wood is large enough to stay, influence flow patterns, and sediment sorting. Larger diameter wood retains its size longer as abrasion and decay occurs over the years. Larger diameter wood is more effective in creating pools and complex channels that improve fish populations. The minimum diameter required for a key piece of wood depends on the bankfull width of the stream is found in the following table:

Table 3. Bankfull widths and minimum diameter of logs to be considered key pieces

Bankfull width* (in feet)	Minimum diameter* (inches)
0 to 10	10
10 to 20	16
20 to 30	18
Over 30	22

*This table was taken from '1995 A Guide to Placement of Large Wood in Streams.

Length:

- The length of the wood is also important to stability. To be considered a key piece a log with a rootwad still attached should be at least 1 1/2 times (1.5 times) the bankfull or a log without a rootwad should be twice (2 times) the length of the stream’s bankfull width. As the best fish habitat is formed around jams composed of three to seven logs, at least two key pieces should be used at each structure.
- Mimic natural accumulations of large woody debris based on stream type, valley setting, and community type and ensure future large woody debris recruitment
- Tailholds as part of tree tipping operations are permitted across perennial, intermittent and ephemeral streams, but the use of protective straps will be required to prevent tree damage.

Juniper Treatments

The majority of the juniper treatment areas would be within the riparian habitat conservation areas and adjoining uplands. For each area evaluated for juniper treatments, interdisciplinary teams would discuss the following questions in order to identify the attributes of an area and select the appropriate treatments:

- What kind of site (potential natural vegetation, soils)?
- Successional state of site?
- Components that need to be restored?
- How units may fit into the overall landscape mosaic?
- Long-term goals and objectives?

Utilize the "Western Juniper Field Guide: Asking the Right Questions to Select the Appropriate Management Actions (Bates et al. 2007, Circular 1321) (see <http://pubs.usgs.gov/circ/1321/pdf/circ1321.pdf>).

Tree and Boulder Hauling

- Apply mitigation and best management practices for dust abatement (water, lignosulfonate, calcium, and magnesium chlorides) dry conditions, and erosion control as directed by physical scientist or road engineer (see road maintenance project design criteria #6 for application).
 - ◆ Haul on gravel and native-surface roads will be limited to dry conditions.

Haul Restrictions to Prevent Fine Sediment Delivery to Streams

- Haul or maintenance is permitted on roads under the following conditions:
 - ◆ During haul, weather conditions are monitored daily for the chance of precipitation by the hydrologist or fish biologist.
 - ◆ No rutting of the road surface is occurring, indicating the subsurface is wet.

- ◆ Frozen ground conditions.
- ◆ Haul will cease at any time when the travelway of the road is wet and turbid water or fines are observed moving off the road surface to ditchlines that deliver to stream channels regardless of time of year.

Roads Exempt from Haul Restrictions Include (Due to No Mechanism for Sediment Delivery):

- Paved roads
- Surfaced Ridge top roads
- Surfaced outloped roads with no ditch or stream crossings

Prescribed Burning and Related Activities

- Mechanical piling and burning of large piles will be restricted to existing roads and landings.
- Include all relevant PDC in silviculture prescriptions and burn plan objectives for all fuel treatment activities within RHCAs.
- Use all available fuel treatments and preparation activities as necessary (for example, multiple entries, slash pull-back, modified ignition methods, locations, timing, and sequence, thinning of small green trees, pruning of green trees and snags, prescribed fire, fire suppression, jack pot burning, etc.) to achieve the specific PDC. Suppression should be used only as a last resort to achieve other PDC.
- Give Malheur Fire staff 2 weeks' notice prior to Big Ck and Summit Ck bridge work for suppression resource coordination and prescribed fire implementation.

For Perennial and Fish-Bearing Stream Channels:

- Avoid removing trees along stream banks (for example, don't cause bank instability or increase erosion).
- Within primary shade zone retain 100 percent of the overstory canopy closure with the exception of hardwood treatment.
- For intermittent, non-fish-bearing stream channels:
 - ◆ Within 50 feet of the stream channel backing fire is preferred.
- For the maintenance and use of water sources and draft sites:
 - ◆ Minimize disturbance of existing riparian vegetation to the greatest extent practical; in particular, maintain shade, bank stability, and large woody material recruitment potential.
 - ◆ Use sediment control measures such as straw bales, filter cloth, or sediment fences when conditions warrant.
 - ◆ Maximize maintenance activities during late summer and early fall to best avoid wet conditions.
 - ◆ Do not pump from streams that do not have continuous surface flow. When pumping water in all situations from streams, ensure that at least one-half of the original streamflow remains below the pump site.
 - ◆ Refuel power equipment, or use absorbent pads for immobile equipment, and prepare concrete at least 150 feet (or as far as possible from the water body where local site conditions do not allow a 150 foot setback) from water bodies to prevent direct delivery of contaminants into associated water bodies.
 - ◆ Fisheries, hydrology or other qualified personnel must work with engineering/fire personnel to review proposed activities to minimize potential effects to fish, stream channel conditions, and water quality.
 - ◆ Use and develop off-channel ponds outside of stream channels were feasible and appropriate. Work with fire folks to prioritize and decommission unnecessary in-stream drafting sites.

- ◆ Water withdrawal equipment must have a fish screen installed, operated and maintained in accordance to NOAA Fisheries guidelines.

Wildlife

Threatened, Endangered or Sensitive Species

- If wolves become established (denning) while project implementation is occurring, measures will be taken to avoid activity in that vicinity
- If any evidence of wolverines is discovered during project implementation, measures will be taken to provide protection. If a den is found we would protect it from human disturbance.

Raptors

- No activities will occur within currently known goshawk or other raptor nest stands. To conserve nesting habitat and to minimize disturbance to nesting individuals, restrictions would be executed according to the requirements of the species involved.
- With all newly discovered raptor nests, a buffer zone would be established by the wildlife biologist to restrict activities near the nest area during occupancy.
- Where possible, retain trees with inactive nests that may be important to secondary nesters (for example, great gray owl).
- Any snags in riparian areas or uplands will be protected from disturbance, removal, or use in stream restoration activities unless deemed a safety hazard at a specific work site.

Big Game

- Within big game winter range a wildlife biologist will be consulted between December 1 and April 1 to determine if activities should be restricted for big game needs.

Botany

Note: Pre-implementation planning project design criteria are identified.

Rare and Sensitive Plants and Habitats

- **Pre-Implementation:** Proposed restoration projects shall be completely surveyed early in the implementation planning process by a qualified botanist or rare plant technician, to identify and assess any sensitive or rare plant populations or habitats.
- **Pre-Implementation:** Proposed restoration projects shall develop restoration plans for degraded sensitive species habitats and/or mitigation plans in areas where sensitive plant populations are documented. This shall be accomplished by a journey-level Forest Service botanist in collaboration with the interdisciplinary team and other stakeholders.
- Heavy equipment, vehicle operation, road construction, staging areas, stockpile areas, piling of slash, fence construction, recreation sites, prescribed fires, fire lines, and other operational activities shall not be allowed in any documented sensitive plant sites unless it is for the demonstrated benefit or protection of the site. All sensitive plant populations should be buffered 100 feet. from all operational activities where topography does not restrict such a distance. Sensitive plant sites and associated buffers shall be identified as areas to protect.

Sensitive and Unique Habitats

- The integrity of unique habitats shall be maintained. Unique habitats [may] include meadows, rimrock, talus slopes, cliffs, animal dens, wallows, bogs [fens], seeps and springs. This shall be accomplished by incorporating cover buffers approximately 100 feet in width.

- Heavy equipment, vehicle operation, road construction, staging areas, stockpile areas, piling of slash, fence construction, recreation sites, prescribed fires, fire lines, and other operational activities shall not occur within, or at the interface of lithosols (scablands).
- Cutting of old-growth juniper shall be prohibited. Old-growth characteristics include: sparse limbs, dead limbed or spiked-tops, deeply furrowed and fibrous bark, branches covered with bright-green arboreal lichens, noticeable decay of cambium layer at base of tree, and limited terminal leader growth in upper branches.

Invasive Plant Species

- **Pre-Implementation:** Proposed restoration projects shall be surveyed for invasive plants early in the implementation planning process by a qualified invasive plant specialist /technician, to identify and assess any undocumented invasive plant infestation.
- **Pre-Implementation:** For project areas that overlap or are adjacent to invasive plant infestations, assure that there is sufficient time prior to develop a long-term site strategy for control, eradication, and revegetation of the site. This shall be accomplished by a qualified invasive plant specialist in collaboration with the interdisciplinary team and other stakeholders.
- All activities shall be conducted in a manner as to minimize or prevent the potential spread or establishment of invasive species.
- Actions conducted on National Forest System Lands that will operate outside the limits of the road prism, require the cleaning of all heavy equipment (bulldozers, skidders, graders, backhoes, dump trucks, etc.) prior to entering the Malheur National Forest. Cleaning will be inspected and approved by the forest officer in charge of administering the project.
- Assure that all materials are weed-free. Use weed-free straw and mulch for all projects conducted or authorized by the Forest Service on National Forest System Lands. If State certified straw or mulch is not available, individual national forests should require sources certified to be weed-free using the North American Weed Free Forage Program standards or a similar certification process.
- Inspect active gravel, fill, sand stockpiles, quarry sites, and borrow material for invasive plants before use and transport. Treat or require treatment of infested sources before any use of pit material. Use only gravel, fill, sand, or rock that are judged to be weed free by District or Forest weed specialists.
- Prohibit heavy equipment operation, vehicle travel, staging areas, fire-control lines, and any other operational activities in invasive plant infestations, unless the activities are for the express purpose of eradicating the infestation or INV1 and INV2 have been completed.
- Conduct post-implementation monitoring for invasive plants. Continue monitoring, treating, and removing invasive plants until all infestations are eradicated and native plant species are well established.

Native Plant Materials and Revegetation

- **Pre-Implementation:** Where the need for native plant materials is anticipated, assure that there is sufficient time for the plant materials specialist to develop a native plant materials plan and/or prescription prior to implementation of planned revegetation, rehabilitation, and restoration projects. This may include allowing for enough time to harvest and store hardwood cuttings, produce suitable quantities of native seed, and/or grow-out container stock.
- Locally adapted, genetically appropriate native plant materials are the first choice for use in revegetation, restoration, and rehabilitation, where timely natural regeneration of the native plant community is not likely to occur. Use a diverse assemblage of species that have the potential to naturally occur in the project area. Acquire native seed or plant sources as close to the watershed as possible. Examples of areas that may need treatment include: habitat restoration efforts, log decks,

staging areas, landing zones, temporary roads, slash piles, culvert replacements, severely burned areas, skid trails, decommissioned roads, invasive species treatments, and other disturbances.

- Non-native, non-invasive plant species may be used in the following situations: (1) when needed in emergency conditions to protect basic resource values (for example, soil stability, water quality, and to help prevent the establishment of invasive species), (2) as an interim, non-persistent measure designed to aid in the re-establishment of native plants, (3) if native plant materials are not available or not economically feasible, and (4) in permanently altered plant communities.
- Under no circumstances shall non-native invasive plant species or noxious weeds be used for revegetation.
- Development, review, and/or approval of revegetation, rehabilitation, and restoration prescriptions, including species selection, genetic heritage, growth stage, seed mixes, sowing guidelines, and any needed site preparation, shall be accomplished by a plant materials specialist who is knowledgeable and trained or certified in the plant community type where the revegetation will occur.
- Concentrate plantings above the bank-full elevation. Sedge and rush mats should be placed and sized to prevent their movement during high flow events.
- Newly planted or seeded areas should be protected from animals and activities that may prevent, retard, or slow the establishment and recovery of native vegetation. Site-specific measures may include building fences, piling slash, jackstrawing, closing areas to vehicles, and/or temporarily changing grazing regimes until the desired condition is sufficiently achieved.

Soils

- For projects involving heavy machinery off roads, the project proponents shall inspect the site for existing impacts to the soil. If existing impacts appear to be heavy on the Malheur National Forest or moderate on the Ochoco National Forest, they shall contact a soil scientist, who shall determine what site specific project design criteria are necessary to meet Forest Plan and Forest Service Manual standards and guidelines. (If a soil scientist is not available, a silviculturist or hydrologist can do the work.) If standards and guidelines cannot be met, heavy machinery shall not be used.
- Erosion would be minimized by following General Aquatic Conservation Measures (see section, above) and by implementing the appropriate project design criteria based on the type of activity (see Appendix A).
- Erosion from heavy machinery use would be minimized; by minimizing compaction and puddling, rutting would be minimized.
- For Livestock Stream Crossings and Off-Channel Watering Facilities, out-of-channel erosion would be minimized.
- For Road Erosion Control, erosion would be minimized.
- For Juniper Removal, erosion would be minimized. It is possible that juniper removal would increase ground cover within a few years, and thereby reduce erosion.
- Prescribed fire (including for disposal of slash after juniper removal) can involve only low- and moderate-severity fire, and erosion from fire lines would be minimized, so erosion from prescribed fire would not be significant.

Heritage Resources

- Compliance with section 106 of the National Historic Preservation Act for activities authorized under this analysis will be completed and concurred with by the Oregon State Historic Preservation Office before any ground disturbing action takes place. For each potential activity the district or zone archaeologist will determine which of the criteria in the 2004 Programmatic Agreement with the Oregon State Historic Preservation Office best fit the particular project. This will vary

somewhat project to project based on the scale of the particular activity, the location on the landscape, and the nature of associated cultural resources, if any.

- The district or zone archaeologist will document their findings on a programmatic agreement form with a project description, rationale and location map which will be attached to the Forest Service Heritage Event database. The forest archaeologist will review and sign off on the programmatic review form if concurred with. For appendices A, B and C projects as defined in the 2004 Programmatic Agreement, the Forest will retain the documentation and provide the Oregon State Historic Preservation Office with the annual summary of projects as described in the Preservation Act.
- For full inventories the district or zone archaeologist will complete an inventory report meeting current Oregon State Historic Preservation Office (SHPO) standards which will be reviewed by the forest archaeologist. The forest archaeologist will forward the completed inventory report to the Oregon State Historic Preservation Office for review and concurrence signature or further discussion as appropriate.
- Consultation with Native American tribes is conducted under the terms of the Memorandums of Understanding the Forest has with each individual tribe. The Forest regularly consults with the Burns Paiute Tribe, the Confederated Tribes of the Umatilla Indian Reservation and the Confederated Tribes of Warm Springs Reservation.
- For work requiring a full inventory under the terms of the 2004 Programmatic Agreement any identified cultural resources sites will generally be avoided. For cases where site avoidance is impractical mitigation procedures will be developed in consultation with the Oregon SHPO before project work begins.
- If any previously unidentified cultural resources are located during project implementation, ground disturbing work will be halted until the resources are evaluated by the district or zone archaeologist. If the cultural resources are determined to be potentially eligible for listing on the National Register of Historic Places work will either be permanently halted or a mitigation plan will be developed in consultation with the Oregon SHPO before work continues.

Recreation

- Motorized aquatic restoration methods would not be used within wilderness, wild portions of wild and scenic rivers, and inventoried roadless areas.
- Mechanized aquatic restoration methods would not be used within wilderness or wild portions of wild and scenic rivers.
- Give the recreation staff and public affairs officer 2 weeks' notice prior to planned closure of Big Creek Campground.
- The 1300-862 road at Bogue Gulch has several popular dispersed camping sites. Post the area two weeks prior to work starting to let the public know the area will be impacted by bridge construction.
- There is a popular dispersed camping site near the Summit Bridge. Post that site two weeks prior to work starting to let the public know the area will be impacted by bridge construction.

Grazing

All new fence construction will be accompanied by a fence maintenance plan. Range staff and permittees are not required to maintain fences that are not associated with permitted use or language in the allotment management plan (AMP).

General

- Range and fire specialists and permittees would coordinate activities including scheduling of burning activities in grazing units.
- Utilize the Forest Post-Fire Interim Grazing Guidelines to aid in determining when to resume grazing activities.
- Whenever possible, units to be rested would be burned in the spring of the year to be rested or in the fall prior to the rest year.
- If a rest period is required following a burn the permittee has the option to exclude cattle grazing from those portions of a pasture that were burned through the use of fencing and could continue to graze the unburned areas of a unit.

Protection of Government and Permittee Investments

- All existing structural range improvements (fences, gates, spring developments, etc.) and permanent ecological plots would be contractually protected.
- Maintain structural integrity of range improvements.
- If structural improvements are damaged during project operations they would be repaired to Forest Service standards prior to livestock scheduled use by the party responsible for causing the damage. Repairs would be required of the purchaser if damage were done during thinning or fuel treatment contractors or by force account where appropriate.
- Three or more splices to a single wire within a distance of 20 feet will be replaced with a single splice.
- Fence right-of-ways (6 feet either side of fence), trails, other developments and access to them would be cleared of slash produced by project activities.

Aspen Restoration

- New aspen exclosure fences would have gates installed in proper locations to allow for removal of stray livestock. Aspen fences would be maintained each year and repaired whenever necessary. Plans for aspen exclosures will define when restoration of the protected stand has been achieved and who has responsibility for maintenance of the structure. When fences are no longer needed, aspen fences should be removed.
- Alternate livestock water sources to those being used in aspen stands would be developed off-site before fencing aspen or re-evaluate fencing of the aspen site. Coordinate with range specialist and permittee.

Notification

- During the planning stage of each individual project all potentially impacted grazing permittees will have notice of action and opportunity to provide input that may lessen impacts to their livestock operation well in advance of implementation.
- Prior to implementation all potentially impacted grazing permittees will be given notice of dates when work will start.

In accordance with Federal civil rights law and U.S. Department of Agriculture (USDA) civil rights regulations and policies, the USDA, its Agencies, offices, and employees, and institutions participating in or administering USDA programs are prohibited from discriminating based on race, color, national origin, religion, sex, gender identity (including gender expression), sexual orientation, disability, age, marital status, family/parental status, income derived from a public assistance program, political beliefs, or reprisal or retaliation for prior civil rights activity, in any program or activity conducted or funded by USDA (not all bases apply to all programs). Remedies and complaint filing deadlines vary by program or incident.

Persons with disabilities who require alternative means of communication for program information (e.g., Braille, large print, audiotope, American Sign Language, etc.) should contact the responsible Agency or USDA's TARGET Center at (202) 720-2600 (voice and TTY) or contact USDA through the Federal Relay Service at (800) 877-8339. Additionally, program information may be made available in languages other than English.

To file a program discrimination complaint, complete the USDA Program Discrimination Complaint Form, AD-3027, found online at http://www.ascr.usda.gov/complaint_filing_cust.html and at any USDA office or write a letter addressed to USDA and provide in the letter all of the information requested in the form. To request a copy of the complaint form, call (866) 632-9992. Submit your completed form or letter to USDA by: (1) mail: U.S. Department of Agriculture, Office of the Assistant Secretary for Civil Rights, 1400 Independence Avenue, SW, Washington, D.C. 20250-9410; (2) fax: (202) 690-7442; or (3) email: program.intake@usda.gov.

USDA is an equal opportunity provider, employer and lender.