




# Arapahoe Basin Ski Area Master Development Plan

20  
25



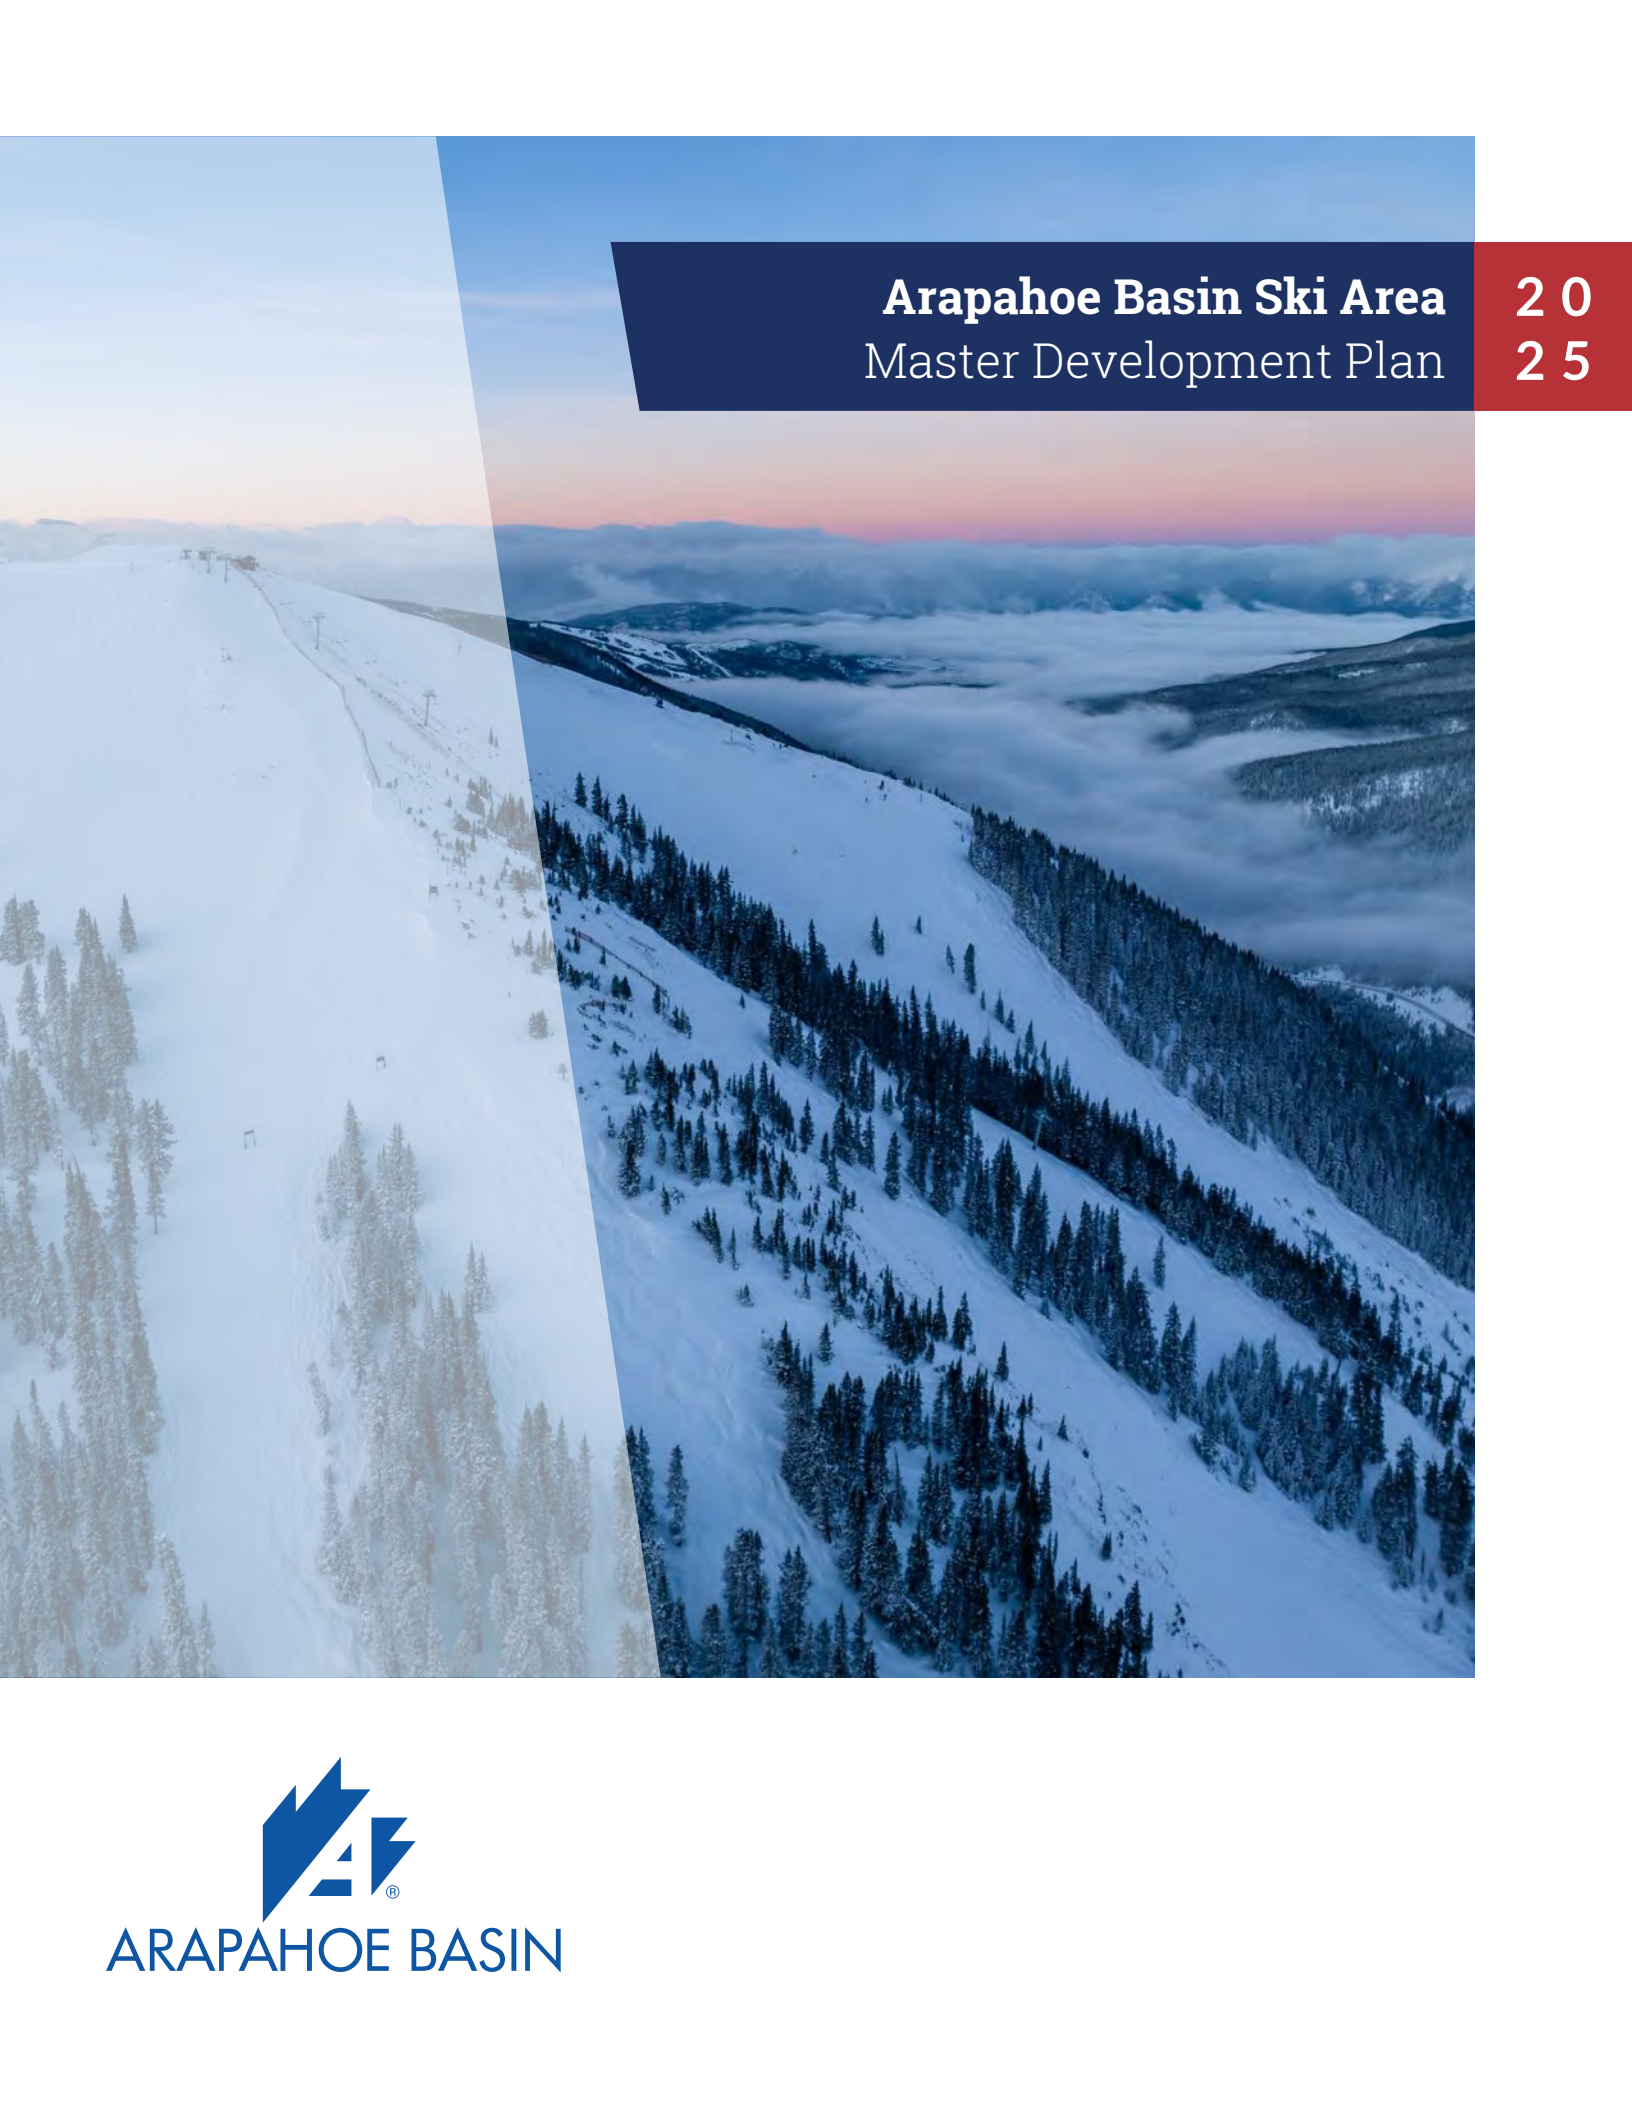

2025

# Arapahoe Basin Master Development Plan

ACCEPTED BY:

Brian Glaspell

Forest Supervisor

White River National Forest

DATE:

9/4/2025

Prepared By:

 **SE GROUP**





|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>CHAPTER 1. INTRODUCTION</b>                                       | <b>1</b>  |
| A. Resort Background.....                                            | 4         |
| 1.Location.....                                                      | 4         |
| 2.History .....                                                      | 4         |
| 3.Resort Summary .....                                               | 5         |
| B. Planning and Environmental Documentation.....                     | 5         |
| C. Plan Vision and Goals .....                                       | 7         |
| D. Summary of the Upgrade Plan .....                                 | 9         |
| <b>CHAPTER 2. DESIGN CRITERIA AND FOREST SERVICE DIRECTION</b>       | <b>11</b> |
| A. Destination Resorts .....                                         | 12        |
| 1.Regional Destination Resorts.....                                  | 12        |
| B. Base Area Design.....                                             | 13        |
| C. Mountain Design.....                                              | 13        |
| 1.Trail Design.....                                                  | 13        |
| 2.Terrain Parks .....                                                | 15        |
| 3.Lift Design .....                                                  | 15        |
| 4.On-Mountain Guest Services.....                                    | 15        |
| D. Design Day Analysis.....                                          | 16        |
| E. Balance of Facilities .....                                       | 16        |
| F. Inventory of Physical Resources .....                             | 17        |
| 1.Topography.....                                                    | 17        |
| 2.Slope Gradients.....                                               | 17        |
| 3.Aspect.....                                                        | 18        |
| 4.Permit Boundary and Ownership.....                                 | 18        |
| 5.Soils and Geology .....                                            | 18        |
| 6.Hydrology.....                                                     | 19        |
| 7.Fish and Wildlife .....                                            | 19        |
| 8.Vegetation.....                                                    | 19        |
| G. Applicable Forest Service Policy Direction .....                  | 20        |
| 1.Laws and Policy Directives.....                                    | 20        |
| 2.2011 Ski Area Recreational Opportunity Enhancement Act.....        | 21        |
| 3.2002 Revised White River National Forest National Forest Plan..... | 22        |

|                                                                                       |           |
|---------------------------------------------------------------------------------------|-----------|
| 4.Recreation Opportunity Spectrum .....                                               | 24        |
| 5.Scenery Resources.....                                                              | 25        |
| 6.Accessibility to Public Lands.....                                                  | 27        |
| <b>CHAPTER 3. EXISTING CONDITIONS</b>                                                 | <b>29</b> |
| A. Summary of the Existing Guest Experience.....                                      | 30        |
| B. Existing Lift Network.....                                                         | 31        |
| C. Existing Terrain Network.....                                                      | 34        |
| 1.Terrain Variety .....                                                               | 35        |
| 2.Terrain Distribution by Ability Level .....                                         | 36        |
| D. Existing Design Day Analysis.....                                                  | 38        |
| 1.Lift Network Capability.....                                                        | 38        |
| 2.Density Analysis .....                                                              | 40        |
| E. Existing Guest Services Facilities, Food Service Seating & Space Use Analysis..... | 43        |
| 1.Guest Services .....                                                                | 43        |
| 2.Space Use Analysis.....                                                             | 45        |
| 3.Food Service Seating.....                                                           | 47        |
| F. Existing Parking Capacity and Resort Access .....                                  | 48        |
| G. Existing Resort Operations .....                                                   | 49        |
| 1.Snowmaking and Grooming .....                                                       | 49        |
| 2.Maintenance Facilities.....                                                         | 50        |
| 3.Infrastructure and Utilities .....                                                  | 50        |
| 4.Domestic Water and Waste Water Treatment .....                                      | 50        |
| 5.Mountain Roads .....                                                                | 51        |
| H. Resort Balance .....                                                               | 51        |
| I. Summer and Multi-Season Operations .....                                           | 52        |
| 1.Summary of the Existing Multi-Season Activities and the Guest Experience .....      | 52        |
| 2.The Summer Zones Concept.....                                                       | 52        |
| 3.Existing Summer Activity Zones.....                                                 | 53        |
| <b>CHAPTER 4. PREVIOUSLY APPROVED, NOT YET IMPLEMENTED PROJECTS</b>                   | <b>55</b> |
| A. Food Service .....                                                                 | 57        |
| B. Snowmaking.....                                                                    | 57        |
| C. Mountain Operations .....                                                          | 57        |

|                                                                                      |           |
|--------------------------------------------------------------------------------------|-----------|
| D. Summer Improvements .....                                                         | 57        |
| <b>CHAPTER 5. UPGRADE PLAN</b>                                                       | <b>59</b> |
| A. Summary of the Upgrade Plan .....                                                 | 60        |
| B. Upgraded Lift Network.....                                                        | 61        |
| C. Upgraded Terrain Network .....                                                    | 63        |
| 1.Terrain Distribution by Ability Level .....                                        | 63        |
| D. Upgraded Design Day Analysis.....                                                 | 64        |
| 1.Lift Network Capability.....                                                       | 64        |
| 2.Density Analysis .....                                                             | 66        |
| E. Upgraded Guest Services Facilities, Food Service Seating & Space Use Analysis.... | 68        |
| 1.Guest Services .....                                                               | 68        |
| 2.Space Use Analysis.....                                                            | 68        |
| 3.Food Service Seating.....                                                          | 69        |
| F. Upgraded Parking Capacity and Resort Access.....                                  | 71        |
| G. Upgraded Resort Operations .....                                                  | 72        |
| 1.Snowmaking .....                                                                   | 72        |
| 2.Avalanche Mitigation .....                                                         | 73        |
| 3.SUP Boundary Adjustment .....                                                      | 73        |
| 4.Maintenance Facilities.....                                                        | 73        |
| 5.Infrastructure and Utilities .....                                                 | 73        |
| 6.Mountain Roads .....                                                               | 74        |
| H. Resort Balance and Limiting Factors.....                                          | 74        |
| I. Upgraded Summer and Multi-Season Operations .....                                 | 75        |
| <b>APPENDIX A. ADDITIONAL TABLES</b>                                                 | <b>77</b> |
| <b>APPENDIX B. SUMMER ZONES</b>                                                      | <b>95</b> |

## List of Tables

|                                                                               |
|-------------------------------------------------------------------------------|
| Table 1. Lift Specifications - Existing Conditions                            |
| Table 2. Terrain Distribution by Ability Level - Existing Conditions          |
| Table 3. Lift Network Capability – Existing Conditions                        |
| Table 4. Density Analysis – Existing Conditions                               |
| Table 5. Space Use Recommendations—Total Resort—Existing Conditions           |
| Table 6. Restaurant Seats—Existing Conditions                                 |
| Table 7. Recommended Parking—Existing Conditions                              |
| Table 8. Summer Use Zones                                                     |
| Table 9. Previously Approved, Not Yet Implemented Projects                    |
| Table 10. Lift Specifications—Upgrade Plan                                    |
| Table 11. Terrain Distribution by Ability Level—Upgrade Plan                  |
| Table 12. Lift Network Capability—Upgrade Plan                                |
| Table 13. Density Analysis – Upgrade Plan                                     |
| Table 14. Space Use Recommendations—Total Resort—Upgrade Plan                 |
| Table 15. Restaurant Seats—Upgrade Plans                                      |
| Table 16. Recommended Parking—Upgrade Plan                                    |
| Table 17. Summer Use Zones                                                    |
| Table A-1. Terrain Specifications—Existing Conditions and Upgrade Plan        |
| Table A-2. Space Use Recommendations—Base Area—Existing Conditions            |
| Table A-3. Space Use Recommendations—Black Mountain Lodge—Existing Conditions |
| Table A-4. Space Use Recommendations—Steilhang Hut—Existing Conditions        |
| Table A-5. Space Use Recommendations—Il Rifugio—Existing Conditions           |
| Table A-6. Space Use Recommendations—Base Area—Upgrade Plan                   |
| Table A-7. Space Use Recommendations—Black Mountain Lodge—Upgrade Plan        |
| Table A-8. Space Use Recommendations—Steilhang Hut—Upgrade Plan               |
| Table A-9. Space Use Recommendations—Il Rifugio—Upgrade Plan                  |
| Table A-10. Space Use Recommendations—Sawmill Flats—Upgrade Plan              |

## **List of Charts**

Chart 1. Terrain Distribution by Ability Level - Existing Conditions

Chart 2. Resort Balance - Existing Conditions

Chart 3. Terrain Distribution by Ability Level - Upgrade Plan

Chart 4. Resort Balance - Upgrade Plan

## **List of Figures**

Figure 1. Vicinity Map

Figure 2. Slope Analysis

Figure 3. Aspect Analysis

Figure 4. Existing Conditions

Figure 5. Existing Snowmaking Coverage

Figure 6. Existing Summer Conditions

Figure 7. Upgrade Plan

Figure 8. Snowmaking Upgrade Plan

Figure 9. Summer Upgrade Plan

Figure 10. Summer Zones Upgrade Plan

Figure 11. Base Area Upgrade Plan









Arapahoe Basin Ski Area is situated in one of the most dramatic settings in not just Colorado, but the United States' ski industry. The striking topography and rustic motif combine to create an intimate atmosphere distinctive among western skiing. In recognition of this unique character, A-Basin has developed a vision which characterizes the services provided and speaks to the nature of their core clientele: "Where the spirit of freedom and big mountain challenges create life altering experiences." Every decision that A-Basin management makes is focused on preserving and improving "the A-Basin experience."

The ski area is located almost entirely on National Forest Service lands. Each mountain resort in the United States on National Forest System (NFS) lands must obtain a United States Forest Service (USFS) Special Use Permit (SUP) to operate on public lands. Forest Service SUPs require the preparation of a Master Development Plan (MDP) that identifies the existing and desired conditions for the resort, as well as proposed improvements on NFS lands within the SUP boundary.

This MDP fulfills this requirement and provides future direction for the development and improvement of A-Basin—ensuring both a balance of facilities and a wide variety of amenities affording an exceptional recreational experience in a manner which is sustainable to the business, operations, and the surrounding environment. This MDP provides a thorough assessment of existing operations and facilities and identifies a comprehensive plan for future improvements to the resort.

Forest Service acceptance of this document as a planning tool for A-Basin does not imply authorization to proceed with implementation of any of the projects that are identified herein. All projects identified within this MDP will require site-specific environmental analysis and approval per the National Environmental Policy Act of 1970 (NEPA) before they can be implemented. This MDP is intended to be a dynamic document, which may be amended periodically to reflect innovations in facilities and recreation.

### Planning + Design Nomenclature

Throughout this document, text highlights (like this one) have been included to explain the various planning and design concepts that are utilized throughout the MDP process. Further descriptions and explanation of these concepts may be found in the appendices.

The MDP is divided into five chapters and includes two appendices:

- Chapter 1—Introduction: provides an overview of the plan, summary of Arapahoe Basin's history and character, statement of the plan vision and goals, and an overall summary of the MDP.
- Chapter 2—Design Criteria & Forest Service Policy and Direction: provides the mountain planning design criteria used in this MDP and details Forest Service policy and direction.
- Chapter 3—Existing Conditions: describes existing resort facilities and evaluates the current balance of resort operations, facilities, and infrastructure. This includes lifts, terrain, guest services, food service seating, and parking.
- Chapter 4—Previously Approved, Not Yet Implemented Projects: inventories projects that have been previously approved through a NEPA process but have yet to be constructed.
- Chapter 5—Upgrade Plan: describes the proposed upgrades to resort facilities and infrastructure.
- Appendix A—Additional Tables: includes terrain and space use specifications for existing conditions and the upgrade plan.
- Appendix B—Summer Zones: includes detail on the summer zones concept and the identified environments of each zone and allowable activities.

# A. RESORT BACKGROUND

## 1. LOCATION

A-Basin is located on the White River National Forest, 15 miles east of Dillon, Colorado (Figure 1). The ski area is accessed by US Highway 6, which runs through the base area. A-Basin is approximately one and a half to two hours driving time from Denver and the Front Range metropolitan area via Interstate 70 and Highway 6, either over Loveland Pass or through the Eisenhower Tunnel.

A-Basin lies within the southern Rocky Mountains, which is traditionally the territory of the Tsésthó'e (Cheyenne) now organized under the Northern Cheyenne Tribe and the Cheyenne and Arapaho Tribe, and Núu-ágha-távǎ-pǎ (Ute) peoples, now organized under the Tribal Business Committee of the Uintah and Ouray Tribal Reservation and Southern Ute Tribal Council. The Cheyenne people are now organized under the Northern Cheyenne Tribe and the Cheyenne and Arapaho Tribes. The resort is located on federally managed public land. A-Basin's SUP constitutes 1,821 acres and was re-issued in 2024.

## 2. HISTORY

Arapahoe Basin Ski Area began in 1946 by Larry Jump and Sandy Schaufler after World War II. As former ski racers and WWII veterans, the pair saw an opportunity at Arapahoe Basin to bring the adventurous skiing they loved in the Alps to the Rocky Mountains. The resort opened with a single rope tow and \$1.25 lift tickets. In its early days, the resort was known for being a bit rowdy and scrappy. Operating on a shoestring budget, the founders did every job at the resort from parking cars to cleaning bathrooms to grooming runs.

In 1953, the resort's first Poma lift was installed, the steepest Poma lift in the world at the time. Larry Jump was also a sales representative for Poma, selling lifts to new resorts all over the United States and receiving a steep discount for lifts at A-Basin. As skiing grew in popularity around the country, Arapahoe Basin also grew, drawing crowds for the same reasons that skiers flock there today: a long season, affordable lift tickets, and steep terrain.

Throughout the 1960's and 70's, the resort changed hands twice, leaving A-Basin in need of major upgrades to comply with stricter safety regulations. Ralston Purina, owner of Keystone Mountain, purchased the resort to be a more advanced sibling to the less advanced neighboring resort, Keystone. Pallavicini was installed, providing access to steep terrain otherwise inaccessible without a hike. The resort became the backdrop to various ski racing, mogul, freestyle, and big-mountain skiing events, always keeping its playful undertones with events like annual swimwear parties.

In the 90's Ralston's ski areas merged with Vail resorts, but A-Basin was sold to Dundee Resort Development of Canada (now known as DREAM) after about a year. The 2006 *Arapahoe Basin Ski Area Master Development Plan Amendment* (MDPA) was analyzed and approved by the White River National Forest in an Environmental Impact Statement and Record of Decision. The MDPA defines an upgrading program for the ski area that includes upgrading existing lifts, adding a lift and new terrain in Montezuma Bowl, and upgrading and expanding skier support facilities (day lodge space, parking, utilities, a restaurant at midway, new rental shop, etc.). The 2013 Master Development Plan built upon the improvements made after the 2006 MDP. After thorough environmental analysis, A-Basin added the Steep Gullies and Beavers areas to their developed terrain network and upgraded lift infrastructure.

Since 2013, A-Basin has sought to pursue thoughtful development while preserving “the A-Basin experience.” To limit crowding and reduce skier density, the resort began to limit ticket and season pass sales to improve the guest experience. In 2020, A-Basin saw a reduction in crowds due to the global Covid-19 pandemic and these efforts, as well as their first year of all-season operations. Guests now enjoy an aerial adventure park, hiking and biking trails, disc golf, special events, and the continent’s highest-elevation via ferrata after the snow melts.

In the fall of 2024, Alterra Mountain Company bought A-Basin from Dundee Resort Development, LLC., transferring the SUP permit and operations of the ski area. Going forward, Alterra intends to keep the legacy of “The Legend” alive and build upon its existing infrastructure and enrich the guest experience, while maintaining its reputation of challenging terrain with a laid-back essence.

### **3. RESORT SUMMARY**

Owned and operated by Alterra Mountain Company, A-Basin is exclusively a day-use resort, with no overnight accommodations, although many visitors are destination guests staying in nearby accommodations. The majority of visits occur on weekends and during holiday periods. A-Basin currently has six aerial lifts, two carpet conveyors, one surface lift, and 147 lift-served alpine trails throughout 1,428 skiable acres. When weather and snow conditions permit, there is an additional 480 acres of hike-to/hike-back terrain. Support facilities include a primary day lodge, rental shop, mid-mountain lodge, maintenance building, five parking areas, and an on-mountain patrol headquarters with a warming hut area and restrooms. There is no night skiing at the resort, and snowmaking coverage is estimated at approximately 74 acres of terrain.

## **B. PLANNING AND ENVIRONMENTAL DOCUMENTATION**

The following list of major planning, environmental, and approval documents are the guiding documents for A-Basin. This MDP builds upon these previous documents.

### 1997 MASTER DEVELOPMENT PLAN

The 1997 Master Development Plan was submitted to the White River National Forest to guide future planning at A-Basin in accordance with the terms of their SUP.

### 1999 MASTER DEVELOPMENT PLAN FINAL ENVIRONMENTAL IMPACT STATEMENT AND RECORD OF DECISION

The Record of Decision approved snowmaking, upgraded facilities, utilities and lifts. Many of these upgrades have been implemented, such as the first phase of snowmaking, utility installation, expansion of Patrol Headquarters, reconfiguring Molly Hogan and adding a conveyor lift.



### 2001 LENAWEE CHAIRLIFT REALIGNMENT ENVIRONMENTAL ASSESSMENT AND DECISION NOTICE/FINDING OF NO SIGNIFICANT IMPACT

The 2001 Decision Notice approved the installation of an upgraded Lenawee lift with a modified alignment. This project has been implemented.

### 2002 WHITE RIVER LAND AND RESOURCE MANAGEMENT PLAN (FOREST PLAN) FINAL ENVIRONMENTAL IMPACT STATEMENT AND RECORD OF DECISION

The Record of Decision for the 2002 White River Land and Resource Management Plan, Final Impact Statement approved Alternative K. It was noted that the Selected Alternative provides a wide variety of recreation opportunities while promoting ecosystem health. As a result of the selection of Alternative K, A-Basin SUP boundary was modified (i.e., expanded) to include Montezuma Bowl and the Beavers area (Figure 4).

### 2006 MASTER DEVELOPMENT PLAN AMENDMENT

The 2006 MDPA was accepted by the White River National Forest in April 2006.

### 2006 IMPROVEMENT PLAN FINAL ENVIRONMENTAL IMPACT STATEMENT AND RECORD OF DECISION

The Record of Decision approved the Exhibition chairlift replacement (now known as the Black Mountain Express), Zuma chairlift installation, the addition of the Montezuma Bowl terrain, and reconfiguration of the Last Chance and Overflow parking lots. All of these proposed upgrades have been implemented.

### 2013 MASTER DEVELOPMENT PLAN

The 2013 Master Development Plan was submitted to the White River National Forest to build upon previous planning at A-Basin in accordance with the terms of their SUP.

### 2016 MASTER DEVELOPMENT PLAN ADDENDUM

This addendum to the 2016 MDP established summer zoning for future summer activities at A-Basin.

### 2016 ARAPAHOE BASIN SKI AREA PROJECTS FINAL ENVIRONMENTAL IMPACT STATEMENT AND RECORD OF DECISION

The Record of Decision approved projects from the 2013 MDP, including the addition of 338 acres of skiing terrain in the Beavers, the expansion of A-Basin's operational boundary by 492 acres, the construction of a new chairlift to access the terrain, a new surface lift to access Montezuma Bowl, replacement of the Molly Hogan and Pallavicini chairlifts, removal of the Norway chairlift, assorted grading projects to enhance circulation, and the construction of an aerial adventure course. All of these proposed upgrades have been implemented.



### C. PLAN VISION AND GOALS

A-Basin provides a distinctly different skiing/riding experience, especially as compared to other large ski areas in Summit County. A-Basin guests expect, and receive, an intimate and diverse skiing experience that is unique in the ski industry and cannot be found at other nearby resorts. The comfortable, easygoing atmosphere and friendly staff at A-Basin contribute to this intimate feel.

In addition to the markedly different atmosphere at A-Basin, the ski area's uniquely challenging terrain has been attracting a devoted following of locals, Front Range day skiers, and destination visitors since 1946. A-Basin's high-alpine environment is incredibly diverse, ranging from easy lower mountain cruisers and the wide-open intermediate terrain of the upper mountain and Montezuma Bowl, to the incomparable steep, trees and bumps of Pallavicini, East Wall, North Glades, and adventurous expert terrain found in the Steep Gullies and Beavers areas. With skiing often from October to June, A-Basin boasts one of the longest ski seasons in North America. Together, these traits have earned A-Basin the title "The Legend" and have inspired a following of die-hard skiers who revere the character, and often extreme conditions, that are unique to A-Basin.

Since the 2012 MDP was accepted, Arapahoe Basin has improved the guest experience with a series of upgrades to winter offerings and kicked off their first full season of summer operations in 2021. In past and future developments at the resort, A-Basin intends to preserve the authentic and adventurous culture that keeps skiers returning year after year. In addition to creating a high-quality guest experience, the resort also prioritizes the wellbeing of its employees, calling their employee culture "their most valuable asset." Arapahoe Basin recognizes its interdependence on the surrounding natural environment and is an industry leader in efforts to mitigate climate change. In 2024 A-Basin achieved carbon neutrality through waste diversion, renewable energy, and fuel reduction efforts.

Through the Upgrade Plan presented in Chapter 5, A-Basin seeks to continue to maintain the unique attributes of "The A-Basin Experience" by improving circulation around the mountain and getting skiers where they want to be more efficiently. Considerable thought and attention has been placed on ensuring that the position of planned lifts and facilities will protect, and enhance, the distinctive skiing experience that A-Basin has built its reputation upon. The purpose of the MDP is to establish A-Basin's direction and priorities for the physical improvements, both short and long term, while retaining the current feel and appeal of "The Legend." It is intended that the MDP will identify the type, size, and location of improvements that are appropriate to achieve these goals.

This MDP is designed to build upon and update the data from the previous planning documents, while meeting A-Basin's main objective which is to provide a high-quality recreational experience that is appealing to guests of all ages and ability levels. The plan also respects the natural environment and incorporates key skier/snowboarder preferences. The following opportunities have been identified to help meet this objective.

### **Beginner Experience**

- Improvement of the lower ability level experience and make skiing more accessible through the creation of an on-mountain ski school hub at Sawmill Flats and improved lift service to *Upper Wrangler*. While A-Basin is primarily known for its advanced terrain, the slopes around *Upper Wrangler* are ideal for newer skiers, but are currently inaccessible to beginners because there is no current way to download from the area back to the base area. Providing a mid-mountain learning area allows new skiers to explore more of the mountain, make a connection with the natural environment and feel a sense of accomplishment. Additionally, expanded snowmaking on A-Basin's easiest terrain will improve the teaching and learning experience. An enriched beginner area will allow A-Basin to diversify its beginner offerings and attract more lower-ability guests.

### **Overall Guest Experience**

- Construction of the skier services hub at Sawmill Flats will benefit guests of any ability level by creating necessary space and reducing dependency on the base area. The facility addresses future indoor space needs and will enhance the on-mountain experience, creating space for those not choosing to ski or ride to experience the mountain via the gondola.
- Expand snowmaking to ensure consistent opening and closing dates, to accommodate demand for early season skiing and riding and to allow for a more diverse terrain offering.
- Improve the arrival experience by increasing lift capacity and creating lift redundancy out of the base area. The addition of more parking will support this increase in lift capacity. A pedestrian bridge over US Highway 6 and pulse gondola will improve pedestrian and vehicular traffic within the base area.

### **Employee Experience**

- Demonstrate commitment to staff wellbeing through increased staff safety during avalanche mitigation via the installation of remote avalanche control devices (RACs), and high-quality employee areas where staff can prepare for work and take breaks from the elements.

### **Year-Round Guest Experience**

- Build upon summer offerings in response to the heightened demand for year-round recreation opportunities in Colorado. These include adding RV parking and day-use cabins.

### D. SUMMARY OF THE UPGRADE PLAN


- Pulse Gondola from Upper Last Chance parking to the pedestrian tunnel
- Gondola from the base area to Sawmill Flats
- Parking expansion and improvements
- Redesigned Admin lot for guest arrival and public transit
- Snowmaking expansion / improvements
- Sawmill Flats skier services hub
- Lift from Sawmill Flats to upper *Wrangler*
- Learning conveyor at Bob's Bowl
- Remote avalanche mitigation devices
- Hiking and mountain biking trails
- Interpretive learning outdoor classroom
- Summer RV accommodations
- Maintenance shop expansion
- Pedestrian bridge
- *Miner's Glade* trail improvements
- Summer and winter day-use guest cabins







## Design Criteria and Forest Service Direction

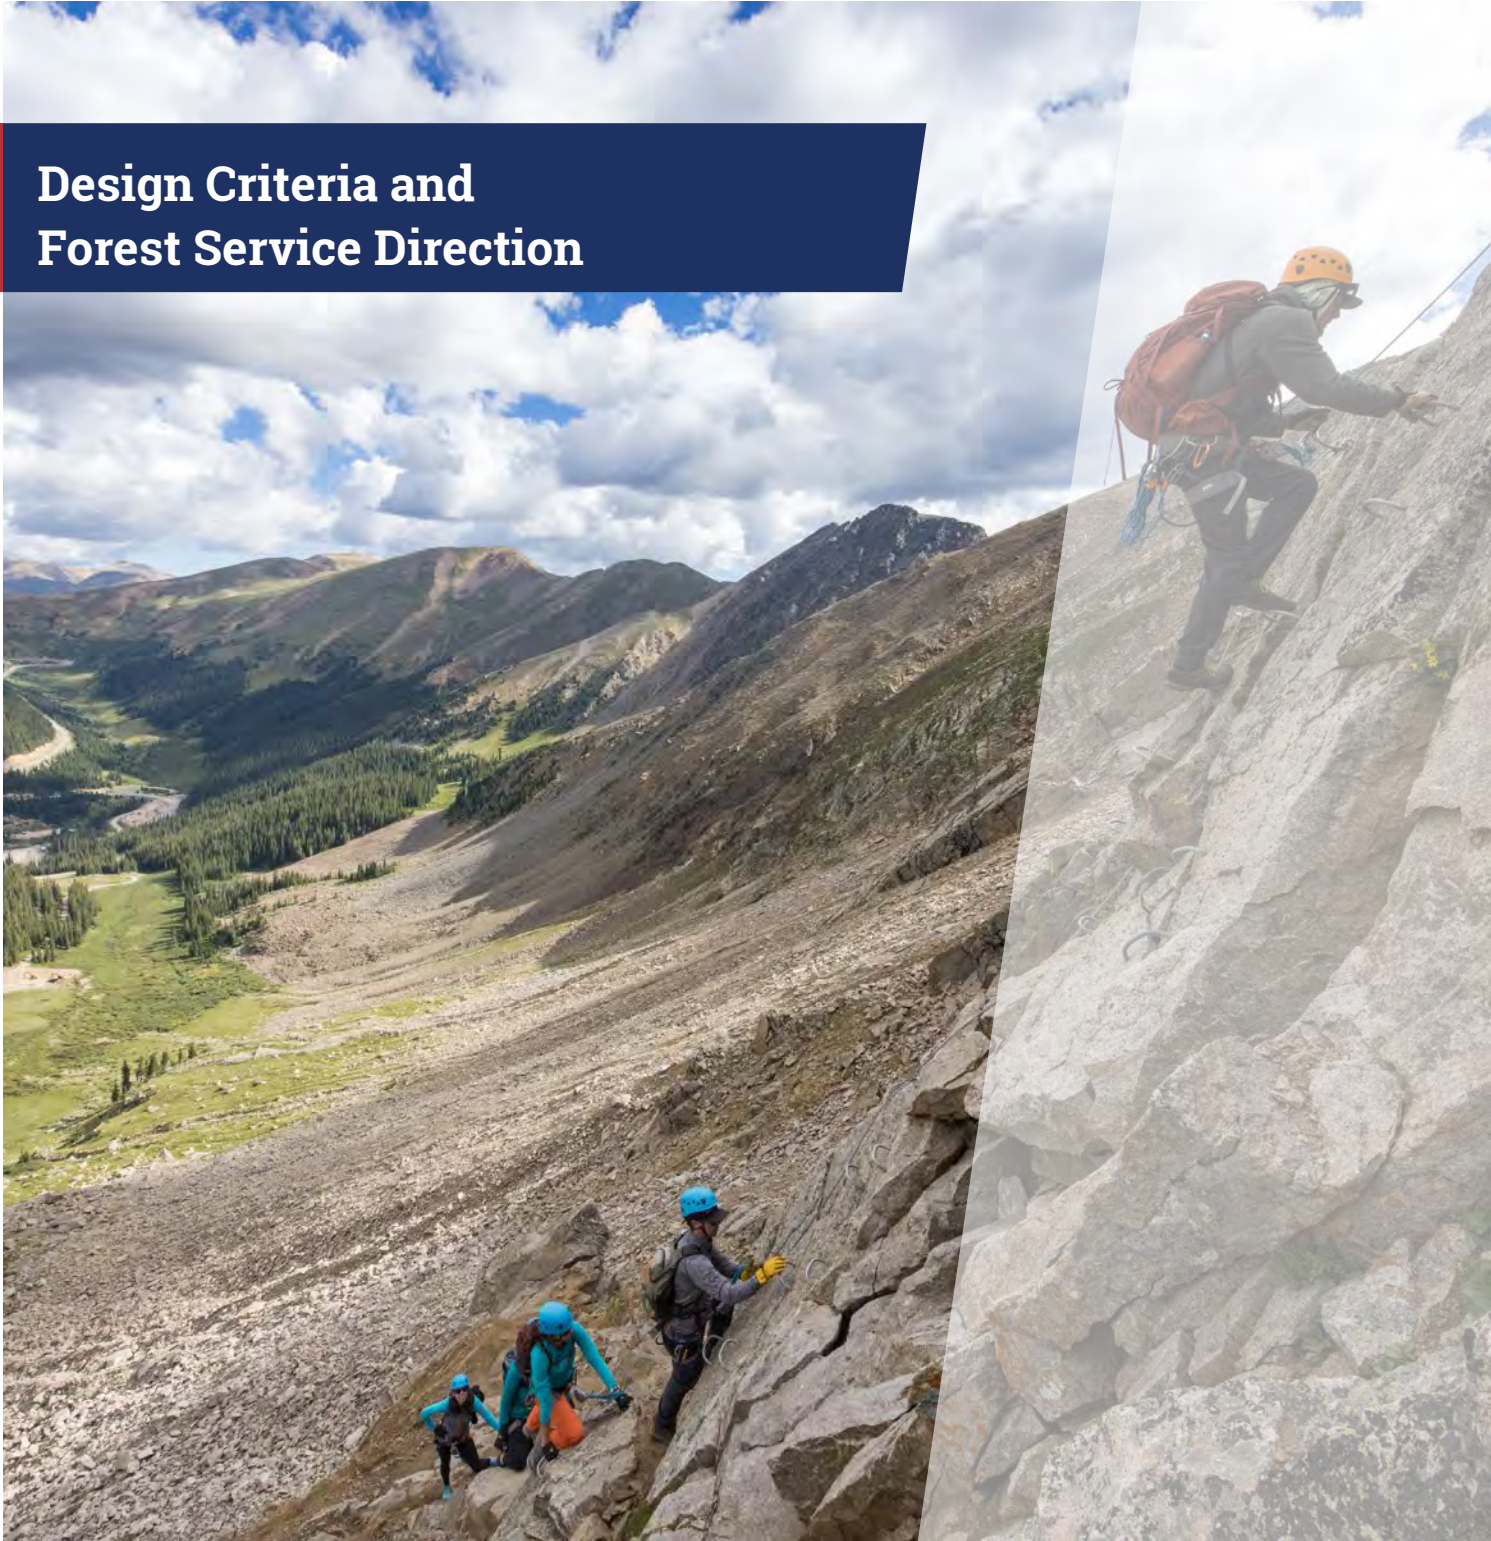



Design criteria is an important concept in resort master planning. Chapter 2 provides an overview of the basic design criteria on which Chapter 3 (Existing Conditions) and Chapter 5 (Upgrade Plan) are based. By design, information presented in Chapter 2 is a general introduction to concepts in resort master planning.

A variety of design criteria, each of which helps to create a quality ski experience, influence the upgrading and expansion of ski areas. At mountain resorts, guests have a variety of expectations—to participate in recreation associated with mountains, to enjoy dining and shopping opportunities, and to enjoy a mix of other vacation experiences in a mountain setting. Thus, a destination resort must offer a variety services, amenities, and experiences that are designed to allow a guest to rejuvenate their spirit. Design parameters that guide the development of everything from the pedestrian-oriented, social environment, to the alpine experience, all contribute to the success of a destination resort.

Along with design guidelines, awareness of consumer preferences is crucial to the overall performance of a resort. Accordingly, detailed market research and user group surveys are effective tools to help guide the development of a successful resort. Resort innovation must be pursued to: (1) attract and retain target customers; (2) satisfy unmet needs; and (3) improve a resort's overall market effectiveness and efficiency.

The following discussion describes several types of mountain resort, and the principal base lands and mountain design criteria that lead to the development of a successful resort.

### **A. DESTINATION RESORTS**

#### **1. REGIONAL DESTINATION RESORTS**

Regional destination resorts largely cater to a “drive” market. While day-use guests play a large role, the regional destination resort also appeals to vacationers. At regional destination resorts, lodging typically is a component, but due to the average length of stay, and perhaps guests' vacation budgets, lodging and related services and amenities are usually less extensive than what might be expected at a larger destination resort that attracts national and international visitors. Where the regional destination resort has evolved from within, or adjacent to, an existing community, services are often supplied by proprietors in the existing community. Such is the case at A-Basin and its relationship to the nearby towns of Keystone, Dillon, Silverthorne, and Frisco. The services offered at A-Basin cater directly to guests of the resort, while proprietors within these nearby towns supply services to vacationers, as well as permanent residents and second homeowners.

### B. BASE AREA DESIGN

The relationship between planning at a resort's base area and its on-mountain lift and terrain network is critical. This relationship affects the overall function and perception of a resort.

Design of the base lands at a mountain resort involves establishing appropriate sizes and locations for the various elements that make up the development program. The complexion and interrelationship of these elements varies considerably depending on the type of resort and its intended character. In every case, however, the fundamental objectives of base area planning remain the same. A resort should seek to integrate the mountain with the base area (or base areas) to establish an attractive, cohesive, and functional recreational and social experience. This is essential to creating the feeling of a mountain community and can only be achieved by addressing base area components such as (but not limited to): multiple mountain portals, guest service locations, skier/rider circulation, pedestrians, parking/access requirements, and mass-transit drop-offs.

Planners rely on resort layout as one tool to establish resort character. The manner in which resort elements are inter-organized, both inside the resort core and within the landscape setting, along with architectural style, help to create the desired character.

Skier service facilities are located at base area and on-mountain buildings. Base area staging locations, or portals, are "gateway" facilities that have three main functions:

- Receiving arriving guests (from a parked car, a bus, or from adjacent accommodations);
- Distributing the skiers onto the mountain's lift and trail systems; and
- Providing the necessary guest services (e.g., tickets and rentals).

### C. MOUNTAIN DESIGN

#### 1. TRAIL DESIGN

##### a) Slope Gradients and Terrain Breakdown

Terrain ability level designations are based on slope gradients and terrain features associated with the varying ability terrain unique to each mountain. Ability level designations for this analysis are based on the maximum sustained gradient calculated for each trail. Short sections of a trail can be more or less steep without affecting the overall run designation. For example, novice skiers are typically not intimidated by short, steeper pitches of slope, but a sustained steeper pitch may cause the trail to be classified with a higher difficulty rating. The following general gradients are used by SE Group to classify the skier difficulty level of the mountain terrain.

| Skier Ability         | Slope Gradient |
|-----------------------|----------------|
| Beginner              | 8 to 12%       |
| Novice                | to 25%         |
| Low Intermediate      | to 35%         |
| Intermediate          | to 45%         |
| Advanced Intermediate | to 55%         |
| Expert                | over 55%       |

Source: SE Group Mountain Planning Guidelines

The distribution of terrain by skier ability level and slope gradient is compared with the market demand for each ability level. It is desirable for the available ski terrain to be capable of accommodating the full range of ability levels reasonably consistent with market demand. The market breakdown for the (region) skier market is shown below illustrating that intermediate skiers comprise the bulk of market demand.

However, A-Basin's ability breakdown differs from the norm in that it is skewed to the advanced end of the spectrum. Information gained through guest surveys conducted by RRC Associates, Inc. (a planning and research firm), along with information provided by A-Basin, determined the ability breakdown for A-Basin shown below in the table.

| Skier Ability         | Percent of Skier Market |
|-----------------------|-------------------------|
| Beginner              | 5%                      |
| Novice                | 15%                     |
| Low Intermediate      | 25%                     |
| Intermediate          | 35%                     |
| Advanced Intermediate | 15%                     |
| Expert                | 5%                      |

Source: SE Group Mountain Planning Guidelines

### b) Trail System

The primary goal for A-Basin's trail system design is to offer a wide variety of ski terrain. Each trail should provide an interesting and challenging experience for skiers within the ability level for which the trail is designed. Optimum trail widths vary depending upon topographic conditions and the caliber of the skier being served. The trail network should provide the full range of ability levels consistent with their market demand.

In terms of a resort's ability to retain guests at that resort, both for longer durations of visitation and for repeat business, one of the more important factors has proven to be variation in terrain. This means having developed runs of all ability levels—some groomed on a regular basis and some not, bowl skiing, tree skiing, backcountry style skiing, and terrain parks and pipes.

In summary, a broad range of skiing terrain satisfies skiers from beginner through expert ability levels within the natural topographic characteristics of the ski area.

### **2. TERRAIN PARKS**

Terrain parks, areas dedicated to the development and maintenance of a collection of alternative terrain features, have become an important part of most mountain resorts' operations. The presence of terrain parks at mountain resorts has changed various operational and design elements. The demand for grooming can increase, as terrain parks often require specialized or dedicated operators, grooming machines, and equipment (such as half-pipe cutting tools). Terrain parks typically require significant quantities of snow, either natural or man-made, often increasing snowmaking demand. Terrain parks can affect circulation on the mountain, as the parks are often points of destination.

### **3. LIFT DESIGN**

The goal for lift design is to serve the available terrain in an efficient manner, i.e., having the minimum number of lifts possible while fully accessing the terrain and providing sufficient uphill supply to balance with the available downhill terrain availability. In addition, the lift design has to take into consideration such factors as: wind, round-trip utilization of a terrain pod, access needs, inter-connectability between other lift pods, the need for circulation space at the lower and upper terminal sites, and the presence of natural resources (e.g., visual impacts, wetlands, and riparian areas). The vertical rise, length and ride time of lifts across a mountain are important measures of overall attractiveness and marketability of any resort.

### **4. ON-MOUNTAIN GUEST SERVICES**

On-mountain guest service facilities are generally used to provide food service (cafeteria-style or table service), restrooms, and limited retail, as well as ski patrol and first aid services, in closer proximity to upper-mountain terrain. This eliminates the need for skiers and riders to descend to the base area for similar amenities. It has also become common for resorts to offer ski/board demo locations on-mountain, so skiers and riders can conveniently test different equipment throughout the day.



### D. DESIGN DAY ANALYSIS

The term design day refers to a day characterized by specific conditions used for planning purposes. In ski area planning, a design day represents a typical busy winter weekend day. It serves as a planning parameter to guide the balanced sizing of a ski resort's primary facilities, such as ski lifts, ski terrain, guest services, restaurant seating, building space, utilities, and parking. The design day reflects a level of facility utilization that ensures a pleasant recreational experience without overburdening the resort infrastructure. It does not represent the resort's maximum visitation capacity but rather the number of visitors that can be comfortably accommodated when all functions and facilities are operating smoothly.

The accurate estimation of a mountain resort's design day is a complex process and an important planning criterion for the resort that takes into account a number of interrelated functions of the resort ecosystem. A resort design day is initially projected based on the carrying capabilities of the resort's lift network, which is calculated by dividing vertical supply (VTF/day) by vertical demand. In many cases, the projected design day will be adjusted to account for limitations of other resort facilities including base lodge seating, mountain restaurant requirements, restrooms, parking and access, and other guest services.

It is important to note that resorts may experience peak days when visitation exceeds the design day by 25% or more. However, consistently exceeding the design day is not recommended, as it can degrade the quality of the recreational experience and negatively impact the resort's market appeal.

The design day also assumes that all resort facilities are operating at full capacity, meaning that all lifts are running at full speed, all skiing terrain is open, and all facilities are staffed and fully functional. However, real-world operations are often affected by factors such as weather, staffing challenges, and competitive market conditions, which can impact the functional capacity of the resort.

The design day is a planning parameter, not a measure of operational scenarios or functional capacity. It should not be used to set visitation limits or guide regulatory decisions. Calculations related to the design day are intended solely for resort planning purposes, and the use of design day for other purposes would be taking design day visitation out of context.

### E. BALANCE OF FACILITIES

The mountain master planning process emphasizes the importance of balancing recreational facility development. The sizes of the various guest service functions are designed to match the design day of the mountain. The future development of a resort should be designed and coordinated to maintain a balance between accommodating guest needs, capabilities of resort functions (lifts, trails, and other amenities such as tubing), and the supporting equipment and facilities (e.g., grooming machines, day lodge services and facilities, utility infrastructure, access, and parking). Note that it is also important to ensure that the resort's design day balances with these other components, facilities, and services at the resort.

## F. INVENTORY OF PHYSICAL RESOURCES

### 1. TOPOGRAPHY

The base lodge and parking lots are located at an approximate elevation of 10,800 feet. Lift-serviced terrain on the mountain extends to 12,470 feet above sea level. Most of the terrain at A-Basin is located in a north facing high alpine bowl with the remaining terrain in the Pallavicini Area and Montezuma Bowl. The steepest slopes on the mountain are found on the Upper East Wall, the upper slopes of Montezuma Bowl, and the Steep Gullies. A ridge separates the main “frontside” bowl (Old A-Basin) from Montezuma Bowl to the south and another ridge is in between the main “frontside” bowl and the steep Pallavicini Area to the west.

The large area known as “The Beavers” is located further west of the Pallavicini Area consists of an upper bowl (Beavers Bowl) with intermediate and advanced slopes that lead into steeper advanced and expert terrain below in the Steep Gullies.

A-Basin has a higher percentage of steeper terrain than most ski areas in Colorado. The skiers that it attracts tend, on average, to be of a higher ability level.

### 2. SLOPE GRADIENTS

The Slope Analysis for A-Basin is shown in Figure 2. The full range of skiable gradients is general in nature and have been color coded for use as a planning tool. The general range of slope gradients used for planning purposes in the resort’s analysis are described below.<sup>1</sup>

- **Easier** – Slopes where the terrain gradient is less than 25%
- **More Difficult** – Slopes where the terrain gradient is greater than 25% and less than 45%
- **Most Difficult** – Those slopes where the terrain gradient is greater than 45% and less than 70%
- **Extreme** – Slopes where the terrain gradient is greater than 70%

Note that there is a significant difference between the ski run ability level ranking approach used in this document and that used by ski areas or regulatory documents such as the Colorado Ski Safety Act. The established approach used at all resorts in the country is to make the ranking be relative to that resort – i.e. the easiest runs at that resort are signed as green circles and the most difficult are signed as black diamonds, the intermediate runs being blue squares. SE Group uses a different approach in this document (and in all other Master Plan documents produced by this company). This approach is aimed at comparing the terrain available at a given resort to the overall skier market, to determine if there are opportunities to appeal to a broader range of skiers. SE Group also uses six categories of ability level, as opposed to the standard three used by mountain resorts. Using various criteria, including maximum sustained gradient, run width, sightlines, and others, SE Group makes an internal determination of which ability level each run falls into. Terrain designations in this document are intended to be used for the purpose of planning and analysis of the ski area rather than regulatory purposes.

---

<sup>1</sup> Detailed trail gradient and skier ability level breakdowns, as described in Chapter 2, are used for the terrain distribution and terrain analysis outlined in Chapters 3 and 5.

### 3. ASPECT

Slope aspect plays an important role in snow quality and retention. The variety of exposures presents opportunities to provide a range of slope aspects that can respond to the changes in sun angle, temperature, wind direction, and shadows. Typical constraints in relation to the various angles of exposure are discussed below:

- **North-facing:** ideal for snow retention, minimal wind scour, minimal sun exposure
- **Northeast-facing:** ideal for snow retention, minimal wind scour, minimal sun exposure
- **East-facing:** good for snow retention, some wind scour, morning sun exposure
- **Southeast-facing:** fair for snow retention, moderate wind scour, morning and early afternoon sun exposure
- **South-facing:** at lower elevations, poor for snow retention, moderate wind scour, full sun exposure
- **Southwest-facing:** poor for snow retention, high wind scour, full sun exposure
- **West-facing:** good for snow retention, high wind scour, late morning and afternoon sun exposure
- **Northwest-facing:** good for snow retention, moderate wind scour, some afternoon sun

### 4. PERMIT BOUNDARY AND OWNERSHIP

A-Basin operates on 1,821 acres of land under a 40-Year SUP issued by the WRNF. The 2002 Forest Plan categorizes the A-Basin permit area as part of Management Area 8.25-Ski Areas, Existing and Potential. Figure 3 shows the current SUP boundary. In 2006 the SUP boundary was adjusted to fix a mapping error that did not include A-Basin's upper parking lots. At that time the CDOT facility was also included in the SUP permit area. The new permit, signed in November 2024, now excludes the CDOT facility from A-Basin's SUP boundary. A-Basin owns 59 acres of private land. The resort is located along the eastern edge of Summit County.

### 5. SOILS AND GEOLOGY

Soils and geology within a ski area may influence the erosion potential of the area, the drainage capabilities, vegetation, and other factors that affect ski area management. A-Basin is situated within the Rocky Mountains. The SUP area, including the frontside, Montezuma Bowl, Beavers, and the Steep Gullies, is primarily characterized by quartz monzonite gneiss. The minerals on the frontside of the resort were largely formed during the Algonkian period, while the quartz monzonite on the backside of the resort was formed during the Tertiary period. The area as a whole has been shaped by landslides and rock glaciers. Several types of soil groups are found within the SUP area, most with very low to low water capacity and variable drainage classes. Surface and subsurface soil erodibility is low within the SUP area. To protect soil resources, there should be proper management of soil drainage, soil stability, and vegetation.<sup>2</sup>

---

<sup>2</sup> USDA Forest Service. 2016. Arapahoe Basin Ski Area Projects Final Environmental Impact Statement. White River National Forest, Glenwood Springs, CO. p. 3-85-3-88

### 6. HYDROLOGY

Hydrology of a ski area influences the availability of water in the area as well as the movement of snowmelt and groundwater. This can influence a ski area's ability to make snow and wetlands within the SUP area. Arapahoe Basin is near the North Fork Snake River which eventually flows into Dillon Reservoir. The area receives approximately 20 inches of precipitation per year.

### 7. FISH AND WILDLIFE

Within the White River National Forest, the humpback chub, bonytail chub, Colorado pikeminnow, razorback sucker, greenback cutthroat trout, and Canada lynx are considered federally threatened and endangered. Threatened and endangered fish may reside downstream from the ski area, but would be affected by upstream activities. Lynx monitoring data from the greater surrounding area suggests that lynx may not live within a ski area, but may cross into ski areas especially at night and in the summer. Lynx habitat connectivity is hindered by human development, but their movement has been documented throughout the SUP area. Sensitive species with present or potential habitat within the SUP include the boreal western toad, the white-tailed ptarmigan, western bumblebee, Northern goshawk, American peregrine falcon, boreal owl, olive-sided flycatcher, pygmy shrew, American marten, North American wolverine, and Rocky Mountain bighorn sheep. Management Indicator Species present within the area include elk, American pipit, aquatic macroinvertebrates, and all trout.<sup>3</sup>

### 8. VEGETATION

The vegetation at a ski area will also influence the wildlife present in the area as well as quality of the soil. Lower elevations at A-Basin are characterized by subalpine fir and Engelmann spruce forests. Much of Arapahoe Basin is above treeline, where vegetation transitions to alpine tundra at around 12,000 feet of elevation. USFWS threatened and endangered species in the area include alpine fen mustard and Osterhout milkvetch, but their habitats are not found within the SUP area.<sup>4</sup>

---

<sup>3</sup> Ibid, p. 3-63-372

<sup>4</sup> Ibid, p. 3-52

### G. APPLICABLE FOREST SERVICE POLICY DIRECTION

The Forest Service nationally supports the recreational opportunities that private ski areas provide. The Forest Service and National Ski Areas Association work in partnership to achieve common goals of managing and promoting active participation in alpine recreation and sports by all people.

Arapahoe Basin's SUP was issued in 2006, under the National Forest Ski Area Permit Act of 1986, 16 U.S.C. § 497b. The Act authorizes the Forest Service to issue term ski area permits "...for the use and occupancy of suitable lands within the National Forest System for Nordic and alpine skiing operations and purposes."<sup>5</sup> The Act states that a permit "shall encompass such acreage as the Secretary [of Agriculture] determines sufficient and appropriate to accommodate the permittee's needs for ski operations and appropriate ancillary facilities."<sup>6</sup>

The basis for determining the types of activities and facilities that are appropriate at winter sports resorts that are permitted to operate on Forest Service lands is contained in federal laws and Forest Service policy directives, and the *2002 Land and Resource Management Plan for the White River National Forest* (Forest Plan), as amended. They also provide the Forest Service with authority and direction pertaining to ski area management on Forest Service lands.

Arapahoe Basin and the Forest Service are connected through a committed long-term partnership to provide quality recreational opportunities on Forest Service lands. By satisfying its current and future visitors, A-Basin will remain a healthy and competitive ski resort within its market niche. This, in turn, would help fulfill Forest Service policy, objectives, and direction for ski area management on the WRNF and the vitality of the local economy.

#### 1. LAWS AND POLICY DIRECTIVES

This MDP provides for high-quality recreation on Forest Service lands and contributes to the economic and operational viability of A-Basin and the communities that depend on the resort. This would help the Forest Service achieve the following legal and policy objectives:

- The Multiple-Use Sustained-Yield Act of 1960 mandates that the Forest Service manage Forest Service lands for "outdoor recreation, range, timber, watershed, and wildlife and fish purposes." 16 U.S.C. § 528 (emphasis added).
- The National Forest Management Act (NFMA) requires the Forest Service to develop Forest Plans that provide for multiple uses of forests, including "coordination of outdoor recreation, range, timber, watershed, wildlife and fish, and wilderness." 16 U.S.C. § 1604(e)(1) (emphasis added).
- The National Forest Ski Area Permit Act of 1986 specifically endorses developed winter recreation on National Forest System lands and authorizes the Forest Service to issue SUPs like that issued at A-Basin that encompasses "such acreage" as the Forest Service "determines sufficient and appropriate to accommodate the permittee's needs for ski operations and appropriate ancillary facilities." 16 U.S.C. § 497b(b)(3).

---

<sup>5</sup> 16 U.S.C. § 497b(b)

<sup>6</sup> 16 U.S.C. § 497b(b)(3)



- The Service-Wide Memorandum of Understanding between National Ski Areas Association and United States Department of Agriculture, Forest Service, FS Agreement No. 07-SU-11132424-246, recognizes “that ski areas can help meet increased demand for recreational opportunities in a managed setting.” The Forest Service stated its commitment to “evaluate four-season recreation at ski areas to improve economic stability and enhance outdoor recreation opportunities during policy formation, master development planning, and project plans.”
- The 2011 Ski Area Recreational Opportunity Enhancement Act (SAROEa) amended the National Forest Ski Area Permit Act of 1986.<sup>7</sup> The 2011 SAROEa enables snow sports (other than Nordic and Alpine skiing) to be permitted on Forest Service lands subject to ski area permits issued by the Secretary of Agriculture. In addition, it clarifies the authority of the Secretary of Agriculture to permit appropriate additional seasonal or year-round recreational activities and facilities on Forest Service lands subject to ski area permits issued by the Secretary of Agriculture. More information on SAROEa is provided in Section II.5.

### 2. 2011 SKI AREA RECREATIONAL OPPORTUNITY ENHANCEMENT ACT

In 2011, SAROEa amended the National Forest Ski Area Permit Act of 1986. The 2011 SAROEa enables snow sports (other than Nordic and alpine skiing) to be permitted on Forest Service lands subject to ski area permits issued by the Secretary of Agriculture. In addition, it clarifies the authority of the Secretary of Agriculture to permit appropriate additional seasonal or year-round recreational activities and facilities on Forest Service lands subject to ski area permits issued by the Secretary of Agriculture. Activities and facilities that may, in appropriate circumstances, be authorized under the Act include but are not limited to, zip lines and ropes courses, mountain biking trails, and Frisbee golf.

In April 2014, the Forest Service provided a Final Directive for Additional Seasonal or Year-Round Recreation Activities at Ski Areas that includes guidance for implementing the 2011 SAROEa. Forest Service Manual (FSM) 2343.14 states that the Forest Service will apply the following screening criteria during review of site-specific proposals prior to the initiation of a NEPA review process. During this master planning stage, projects are conceptual and do not include the level of design that would be required to fulfill all of the screening criteria; instead, site-specific detail is to be provided during the project proposal stage to initiate the NEPA process. The screening criteria included in FSM 2343.14(1) guide the development of projects on Forest Service lands, and the activities and facilities associated with those projects must:

- (1)(a) Not change the primary purpose of the ski area to other than snow sports;
- (1)(b) Encourage outdoor recreation and enjoyment of nature and provide natural resource-based recreation opportunities;
- (1)(c) To the extent practicable, be located within the portions of the ski area that are developed or that will be developed pursuant to the MDP;
- (1)(d) Not exceed the level of development for snow sports and be consistent with the zoning established in the applicable MDP;

---

<sup>7</sup> Public Law 112-46-Nov. 7, 2011, 125 Stat. 539

- (1)(e) To the extent practicable, harmonize with the natural environment of the site where they would be located by:
  - (1)(e)(1) Being visually consistent with or subordinate to the ski area's existing facilities, vegetation and landscape; and
  - (1)(e)(2) Not requiring significant modifications to topography to facilitate construction or operations.
- (1)(f) Not compromise snow sports operations or functions; and
- (1)(g) Increase utilization of snow sports facilities and not require extensive new support facilities, such as parking lots, restaurants, and lifts.

Again, the above screening criteria will be applied for the planned activities in this MDP during the NEPA process that would occur with project proposal. At that point, design plans more detailed than those generated within this master planning process would be made available.

FSM 2343.14(8) provides narrower guidance for elements to be included in the master planning process. Specifically, the master planning process should:

- (8)(a) Establish zones to guide placement and design of additional seasonal or year-round recreation facilities, basing the zones on the existing natural setting and level of development to support snow sports;
- (8)(b) Depict the general location of the facilities; and
- (8)(c) Establish an estimated timeframe for their construction.

### 3. 2002 REVISED WHITE RIVER NATIONAL FOREST NATIONAL FOREST PLAN

A-Basin operations that are conducted on NFS lands within the SUP area must comply with the management directions provided in the 2002 Forest Plan. The 2002 Forest Plan includes 33 separate Management Areas for different portions of the Forest based on ecological conditions, historic development, and anticipated future conditions. A-Basin falls within the Management Area 8.25 - Ski Areas - Existing and Potential, which directs:

*"Facilities may be intensively used throughout the year to satisfy a variety of seasonal recreational demands. Base areas that serve as entrance portals are designed as gateways to public lands. Forested areas are managed as sustainable cover with a variety of species and age classes in patterns typical of the natural landscape character of the area. Protection of scenic values is emphasized through application of basic landscape aesthetics and design principles, integrated with forest management and development objectives."*<sup>8</sup>

---

<sup>8</sup> USDA Forest Service. 2002. White River National Forest Land and Resource Management Plan 2002 revision. White River National Forest, Glenwood Springs, CO.

The theme of Management Area 8.25 is:

*"Ski areas are developed and operated by the private sector to provide opportunities for intensively managed outdoor recreation activities during all seasons of the year. This management area also includes areas with potential for future development."*<sup>9</sup>

While the entirety of A-Basin's existing SUP falls within management area 8.25, the expanded parking area and SUP adjustment falls under Management Area 4.32 - Dispersed Recreation, High Use, which is managed for "recreational opportunities and scenic qualities in locations that attract high numbers of users."<sup>10</sup>

Direction for Management Area 4.32 is:

*"types of areas commonly located adjacent to bodies of water where the public concentrates for recreational purposes... These activities occur in structured settings characterized by scenic beauty...Trails and roads may lead to and around lakes or other areas within this management area. Facilities may include campgrounds, picnic grounds, overlooks...hardened surfaces may be provided at boat launches or other areas of high use, but are constructed to protect sensitive natural resources such as soil and vegetation...Recreation, residences, resorts, and youth camps may be present and managed to provide unique recreation opportunities."*<sup>11</sup>

Beyond the 2002 Forest Plan, the Final EIS that was prepared for it has an entire chapter devoted to analysis of ski areas that are permitted on the Forest. Regarding the role of ski area master development plans, the 2002 Forest Plan Final EIS states:

*"New technology and changing skier preferences with regard to terrain and on-mountain services motivate ski areas to adapt and change in order to remain competitive. Because of this, master development plans are dynamic. The Forest Service participates with ski areas in planning changes to meet public needs. Prior to approval for implementation, the master development plan and its component parts are subject to environmental analysis in accordance with the National Environmental Policy Act and other relevant laws and regulations."*<sup>12</sup>

The Forest Service is authorized to approve certain uses of NFS lands under the terms of SUPs.<sup>13</sup> Generally, SUPs for recreational developments are issued and administered for uses that serve the public,

---

<sup>9</sup> USDA Forest Service. 2002. White River National Forest Land and Resource Management Plan 2002 revision. White River National Forest, Glenwood Springs. CO. p. 3-80

<sup>10</sup> Ibid.

<sup>11</sup> Ibid.

<sup>12</sup> USDA Forest Service. 2002. Final environmental impact statement, Volume 1, for the White River National Forest land and resource management plan 2002 revision. White River National Forest, Glenwood Springs. CO. p. 3-437

<sup>13</sup> 16 USC 497. 1999. 64 FR 8681-8690. National Forest Ski Area Permit Act of 1986 – as adopted in 1999. February 22.

promote public health and safety, and provide land stewardship. In accomplishing these objectives, the SUP held by A-Basin authorizes the following:

*“Ski lifts and tows, ski trails, day lodge, restaurants, maintenance and snowmaking facilities, roads, utilities, parking, signs, radio base facilities, explosive cache, and other facilities and improvements needed in the operation and maintenance of a four-season resort.”*

The 2002 Forest Plan anticipates that the population growth in Colorado, and along the Front Range in particular, will contribute to an increase in skier visits over the next ten years. The Final EIS that approved the 2002 Forest Plan stated that all of the existing ski areas in Summit County show signs of overcrowding, and that Summit County is likely to be more heavily impacted by future increases in population than any other county on the WRNF. It goes on to state that Summit County would benefit from the allocation of additional terrain to lower skier densities.<sup>14</sup> Alternative K—the Selected Alternative from the Final EIS that approved the 2002 Forest Plan—provided the mechanism for expanding A-Basin’s SUP boundary to include both Montezuma Bowl and the Beavers (both of which were previously included within the SUP boundary but subsequently removed). The 2002 Forest Plan EIS notes that “skiers and boarders will benefit from increased protection from avalanches if [Montezuma Bowl and the Beavers] are included within the ski area boundary and developed for skiing.”<sup>15</sup>

The 2002 Forest Plan FEIS provides detailed information on “Future Expansion” areas at existing ski areas across Eagle, Garfield, Pitkin, and Summit counties. Related to the A-Basin’s SUP area, and specifically related to planned projects discussed in this MDP, the 2002 Forest Plan FEIS states:

*“The Beavers are popular with backcountry skiers and snowboarders who access the site from Arapahoe Basin ski area. Steep north-facing chutes above treeline with numerous rock outcrops characterize the terrain. Most skiers hike or hitchhike uphill to return to their vehicles. Avalanche risk to the public is potentially high. The risk could be partially mitigated if the Beavers site was developed for skiing as part of the ski area”<sup>16</sup>*

#### 4. RECREATION OPPORTUNITY SPECTRUM

The Recreation Opportunity Spectrum (ROS) is a framework for stratifying and defining classes of outdoor recreation environments, activities, and experience opportunities. The assigned desired ROS condition class is the maximum level of use, impact, development, and management that an area should experience over the life of the Forest Plan. The ROS is not prescriptive; it serves as a tool for land managers to identify and mitigate change. Recreational carrying capacity is a consequence of adopting specific ROS classes for which a landscape will be managed. The WRNF designates ROS categories separately for snow and non-snow seasons. The ROS is a key component of management direction in the Forest Plan.

---

<sup>14</sup> USDA Forest Service. 2002. Final environmental impact statement, Volume 1, for the White River National Forest land and resource management plan 2002 revision. White River National Forest, Glenwood Springs. CO. p. 3-473

<sup>15</sup> Ibid. p. 3-475

<sup>16</sup> Ibid. p. 3-462

The ROS of A-Basin's SUP area and all areas within Management Area 8.25 is *R – Rural*. The Forest Service defines areas governed by the *Rural* ROS as follows:

*The natural environment is substantially modified to the point that developments are dominant to the sensitive observer. Structures are readily evident and may range from scattered to small dominant clusters. Pedestrians or other slow-moving observers are constantly within view of culturally changed landscapes. The social setting provides for moderate to high visitor contact.*

A-Basin's development will comply with all regulations applicable to the *Rural* ROS in the WRNF.

## 5. SCENERY RESOURCES

### a) Scenery Management System

Human activities can cause changes to scenic resources that can be objectively measured. By assessing the existing scenic character of an area in terms of pattern elements (form, line, color and texture) and pattern character (dominance, scale diversity and continuity), it is possible to identify the extent to which the scenic character would exhibit scenic contrast with the surrounding landscape, or conversely—scenic compatibility.

The Forest Service adopted the Scenery Management System (SMS) in 1995 as the Agency's primary scenery management tool. In brief, the SMS is a systematic approach for assessing scenic resources in a project area to help make management decisions.

The acceptable limits of change for a particular area (e.g., Management Area, as defined in the 2002 Forest Plan) are the documented "Scenic Integrity Objectives" (SIO, as defined in the SMS), which serve as management goals for scenic resources. SIOs provide a measure of visible disruption of landscape character, ranging from **Very High** to **Unacceptably Low**. In order of least-to-most altered, SIOs are:

- **Very High** (unaltered)
- **High** (appears unaltered)
- **Moderate** (slightly altered)
- **Low** (moderately altered)
- **Very Low** (heavily altered)
- **Unacceptably Low** (extremely altered)

For reference, *Very High* SIOs are typically found in designated wilderness areas and special interest areas. While there is no standard for SIOs in relation to ski area SUP areas on NFS lands, in most cases, they fall somewhere between *Very Low* and *Moderate*. This is in recognition of the developed nature of ski areas, which tend to operate in highly scenic environments (i.e., assigning an artificially high SIO at a developed ski area would be unachievable, just as assigning an artificially low SIO would not incentivize the ski area to strive to minimize visual impacts).

As indicated in the 2002 Forest Plan, the SIO for the A-Basin SUP area is "Very Low." This SIO befittingly refers to landscapes where the valued landscape character "appears heavily altered." The frame of



reference for measuring achievement of SIOs is the valued attributes of the “existing” landscape character “being viewed.” The “Very Low” SIO is defined as:<sup>17</sup>

*Deviations may strongly dominate the valued landscape character. They may borrow from valued attributes such as size, shape, edge effect and pattern of natural openings, changes in vegetation types, or architectural styles outside the landscape being viewed. However, deviations must be shaped by and blend with the natural terrain so that elements such as unnatural edges, roads, landings and structures do not dominate the composition.*

However, the Forest Plan states that all National Forest System lands shall be managed to attain the highest possible visual quality commensurate with other appropriate public uses, costs, and benefits.<sup>18</sup>

### b) Built Environment Image Guide

The Built Environment Image Guide (BEIG) was prepared by the Forest Service for the “thoughtful design and management” of the built environment contained within the National Forests.<sup>19</sup> The Forest Service defines the built environment as “the administrative and recreation buildings, landscape structures, site furnishings, structures on roads and trails, and signs installed or operated by the Forest Service, its cooperators, and permittees.”<sup>20</sup>

The BEIG divides the United States into eight provinces which combine common elements from the ecological and cultural contexts over large geographical areas; A-Basin’s SUP area and adjacent NFS lands are within the Rocky Mountain Province. Site development, sustainability, and architectural character should conform to BEIG guidelines described for this Province. For reference, four of A-Basin’s recently constructed on-mountain structures—Steilhang (2021), Black Mountain Lodge (2007), Winter Sports Center (2005), and the Snow Plume Refuge (2004)—are BEIG-compliant. All other on-mountain and base area buildings within A-Basin’s SUP area pre-date the BEIG (2001).

---

<sup>17</sup> USDA Forest Service. 2002. White River National Forest Land and Resource Management Plan 2002 revision. White River National Forest, Glenwood Springs. CO.

<sup>18</sup> USDA Forest Service. 2002. Final environmental impact statement, Volume 1, for the White River National Forest land and resource management plan 2002 revision. White River National Forest, Glenwood Springs. CO. p.AA-17

<sup>19</sup> USDA Forest Service, 2001. The Built Environment Image Guide for the National Forests and Grasslands. FS-710.

<sup>20</sup> Ibid.

### 6. ACCESSIBILITY TO PUBLIC LANDS

In June 2005 the Forest Service released the [Accessibility Guidebook for Ski Areas Operating on Public Lands, 2005 Update](#). This guidebook provides information for ski areas authorized under a SUP to work with the Forest Service in providing equal opportunities for all people, including those with disabilities. A-Basin will maintain consistency with this guidebook for future development projects occurring on public lands.


Ski areas operating under special-use authorization from the Forest Service are required to comply with both the Americans with Disabilities Act of 1990 (ADA) and Section 504 of the Rehabilitation Act of 1973 (Section 504). The ADA applies because A-Basin operates as a “public accommodation;” moreover, A-Basin is a business open to the public. Section 504 applies because A-Basin operates under a SUP authorized by the Forest Service. Through the SUP, the ski area agrees to abide by these and all other laws, regulations, and policies of the federal, state, and local governments with legal jurisdictions on the ski area.

Significant legislation that preceded the ADA includes the Architectural Barriers Act (ABA) of 1968 and the Rehabilitation Act of 1973, as amended. ABA was the first measure passed by Congress to ensure access to facilities. The ABA requires that all facilities built, bought, or leased by or for a Federal agency be accessible. Section 504 of the Rehabilitation Act states: “No otherwise qualified individual with a disability in the United States shall, solely by reason of his disability, be excluded from participation in, be denied the benefits of, or be subjected to discrimination under any program or activity receiving Federal financial assistance or under any program or activity conducted by any Executive Agency.”

A-Basin currently complies with this legislation through their active involvement in assisting disabled guests with skiing and other recreation activities. Through future site-specific NEPA and design development reviews, A-Basin will work closely with the Forest Service to ensure accessibility measures are taken to provide equal opportunity to all users of public lands.





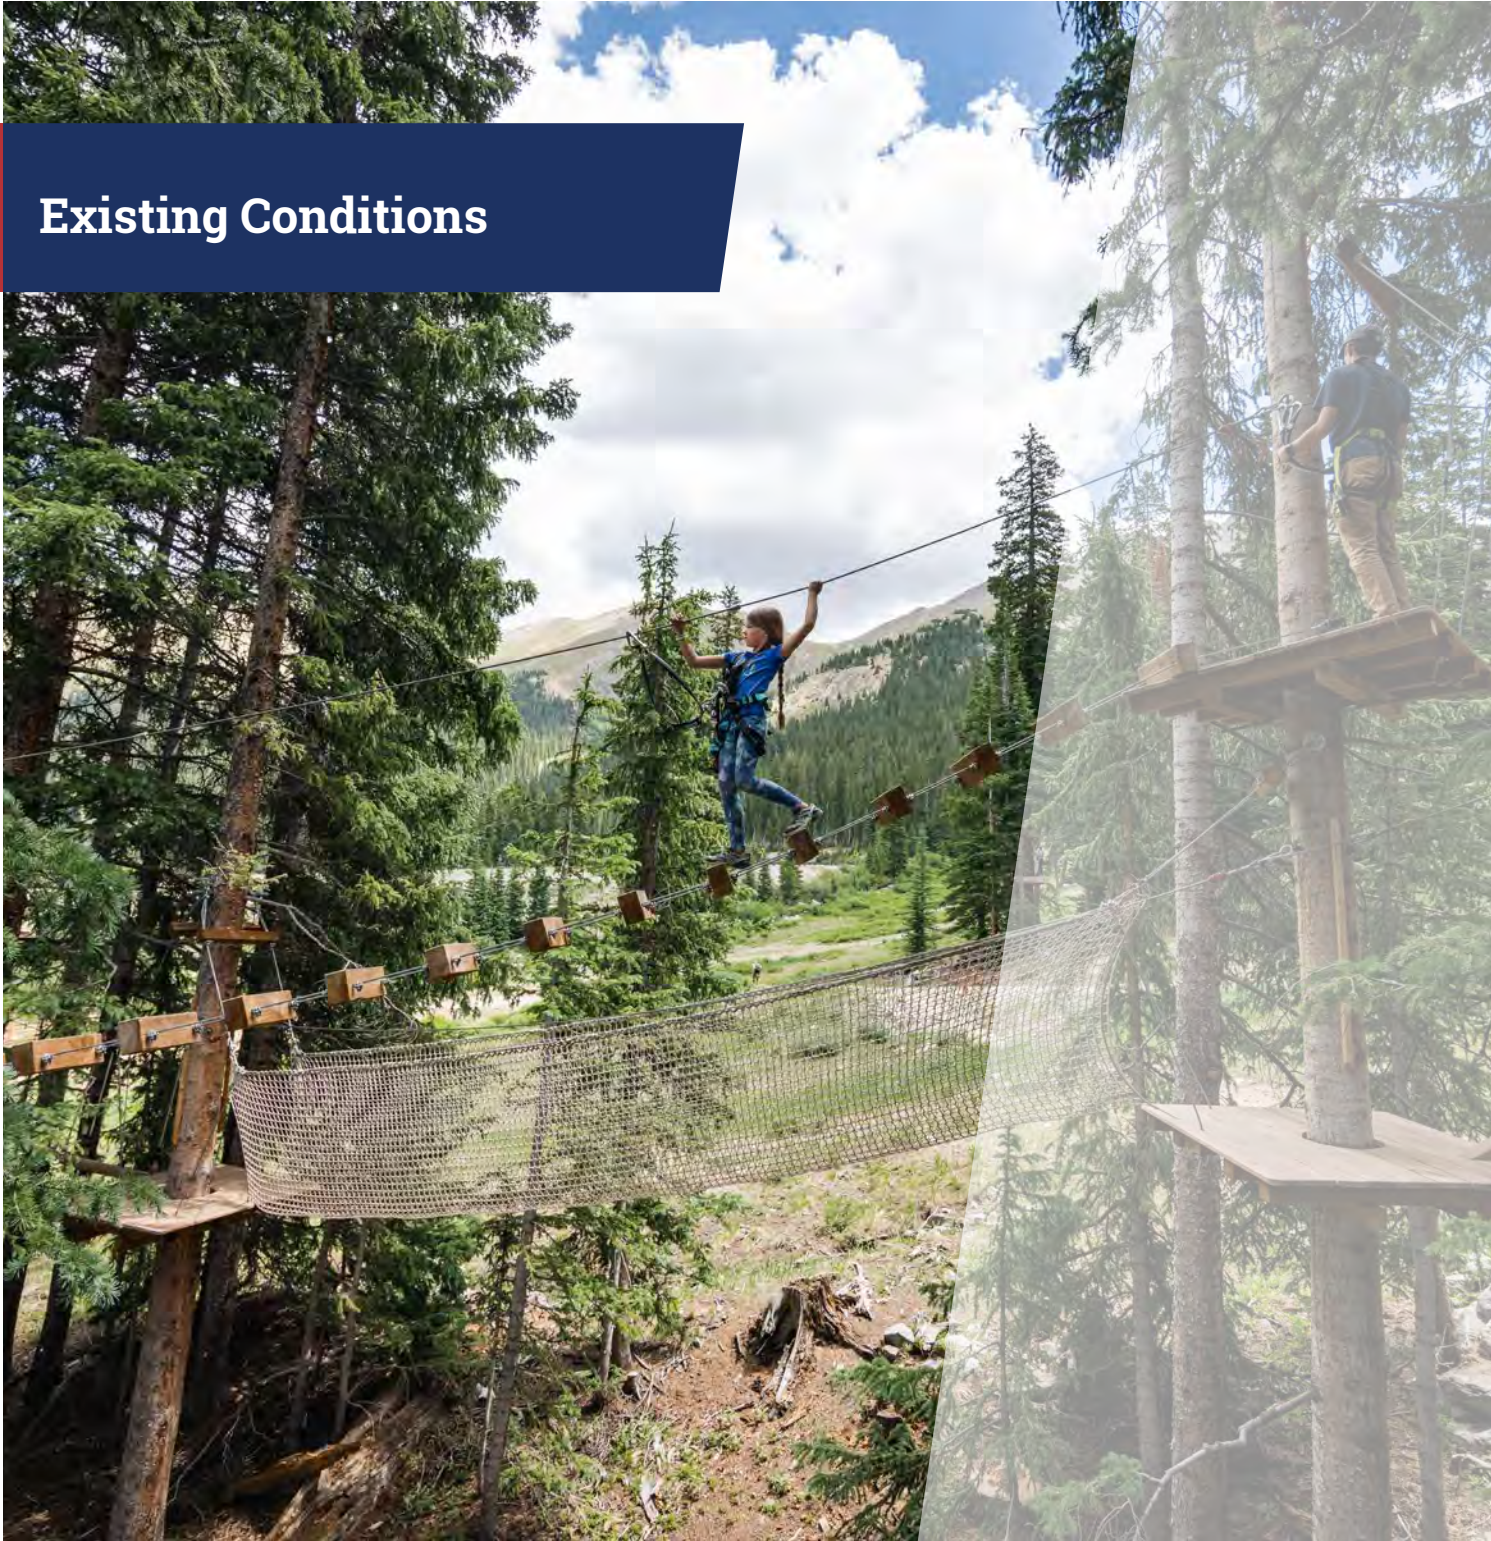

The following section contains an examination and analysis of existing skier facilities at A-Basin. The resort inventory is the first step in the evaluation process and involves the collection of data pertaining to A-Basin's existing facilities. This inventory includes ski lifts, ski trails, the snowmaking system, base area structures, skier services, and day-use parking/shuttle services. The analysis of the inventory allows for the comparison of A-Basin's existing ski facilities to those facilities commonly found at other North American ski resorts of similar size and composition.

The overall balance of the existing ski area is tested by evaluating the support capabilities of the lifts, terrain, guest service space, seating, and parking supply at A-Basin. This examination of existing resources helps to identify the ski resort's strengths and weaknesses. The next step is to identify improvements that would help bring the existing ski area into better equilibrium, and help the resort meet the ever-changing needs of their skier market. Accomplishing both objectives should ultimately enhance A-Basin's financial performance.

A-Basin's existing facilities are shown in figures 4 – 6.

### **A. SUMMARY OF THE EXISTING GUEST EXPERIENCE**

A-Basin is known throughout the Rocky Mountain Region and beyond for its adventurous terrain and relaxed atmosphere. What began as a small winter resort with one rope tow has developed into a multi-seasonal recreation destination offering skiing, hiking, biking and other activities. Despite undergoing significant changes, A-Basin has intentionally worked to maintain the same resort feel that has attracted skiers for decades. One method recently implemented by A-Basin is limiting the number of pass and lift ticket sales to prevent crowding and preserve a high-quality recreational experience.

A-Basin's winter offerings are focused on alpine skiing and riding. Boasting the longest ski season in Colorado, the resort operates six aerial lifts and three surface lifts across its 1,821 acres of A-Basin's SUP. Some terrain requires a hike before or after skiing down, catering to guests desiring a backcountry-adjacent experience with the safety and amenities of a resort. While A-Basin's topography is known for being steep and rugged, there are trails for beginners and experts alike. The resort began offering summer activities in 2020, including a via ferrata, an aerial adventure Park, hiking and mountain biking trails, scenic chairlift rides, and more.



### B. EXISTING LIFT NETWORK

A-Basin's lift network currently consists of six aerial lifts and three surface lifts/conveyors. These include:

- One high-speed six-pack: Lenawee Express
- One detachable quad: Black Mountain Express
- Three fixed-grip quads: Zuma, Beavers, and Molly Hogan
- One fixed-grip double: Pallavicini
- Two carpet conveyor lifts: Molly's Magic and Pika Place
- One surface lift: Lazy J Tow

A-Basin's lift locations service the existing terrain efficiently. Many lifts were recently replaced and should function well for the next few decades.

#### Black Mountain Express

The Black Mountain Express is A-Basin's primary out-of-base lift and accommodates all of the ski area's winter and summer activities by providing direct access to the Black Mountain Lodge. Pallavicini is another out-of-base lift, but because it serves predominately advanced terrain with limited services, most skiers start their day on the Black Mountain Express. The lift was upgraded to a detachable quad in 2010, which considerably increased uphill capacity and reduced lift lines, especially during the morning staging period. The lift ascends about halfway up the mountain to Black Mountain Lodge. From there, skiers can access Lenawee Express or descend back to the base on novice-to-expert trails. The lift generally operates efficiently, but may experience long lift lines as the primary out-of-base lift. If the lift cannot operate for whatever reason, skiers must ride Pallavicini, which is not suitable for novice skiers. Another out-of-base lift could alleviate this issue.

#### Pallavicini

Pallavicini, a fixed-grip double chairlift originally installed in 1978, was replaced in 2020. It ascends out of the base near The Beach to a ridge that separates the frontside of the resort with The Beavers area. The terrain the lift primarily serves is its namesake, with mostly expert terrain. Skiers can drop into The Beavers or The Steep Gullies areas through controlled access gates or descend back to base. Because this area requires more snow coverage to be considered skiable, Pallavicini opens later than Black Mountain Express around late November or early December.

#### Lenawee Express

The Lenawee Express is a detachable six-passenger chairlift that serves the upper elevations on the frontside of A-Basin. The lift was upgraded from a fixed-grip triple to a detachable six passenger chairlift in 2022. From the Black Mountain Lodge, skiers take *Wrangler* to the bottom terminal, then ascend up to the ridge separating the Frontside and Montezuma Bowl. This ridge, sitting at 12,500 feet, allows access to any portion of the mountain. Guests can access the Il Rifugio restaurant, hike up to East Wall terrain, drop into Montezuma Bowl, ski into the Beavers, or cruise intermediate runs down the Frontside. To access Montezuma Bowl from Lenawee Express, skiers can take the Lazy J Tow across the flat terrain.

### Zuma

The Zuma Lift and Montezuma Bowl opened in January 2008. The lift is a fixed-grip quad and serves the mountain area very efficiently, nearly doubling A-Basin's lift-served terrain at the time of expansion. It has been well received by A-Basin's local and destination guests alike. From the bottom of Montezuma Bowl, it ascends to the ridge separating the Frontside and Montezuma Bowl. It serves mainly intermediate-to-expert terrain. Below the bottom terminal are controlled access gates that require a hike back up to the lift.

### The Beavers

The Beavers Lift and its namesake terrain were added to Arapahoe Basin's terrain offerings in 2018. It is a fixed-grip quad chairlift and serves the terrain efficiently. The bottom terminal is situated at the bottom of two intermediate runs, *Loafer* and *Davis*, and ascends to Il Rifugio Restaurant. From the top, skiers can drop back into the Frontside or Montezuma Bowl, or descend back into the Beavers. There are controlled access gates to the Steep Gullies area that requires a hike back to the base or The Beavers Lift.

### Beginner Lifts

The Molly Hogan fixed-grip quad chairlift, Pika Place Carpet, and Molly Carpet provide transportation for the novice and beginners at the base of the mountain. New skiers make their first turns off the carpets, then move to the Molly Hogan lift when they gain confidence.

Specifications for the existing lifts are set forth in Table 1.

**Table 1. Lift Specifications—Existing Conditions**

| Lift Name,<br>Lift Type   | Top<br>Elevation<br>(ft.) | Bottom<br>Elevation<br>(ft.) | Vertical<br>Rise<br>(ft.) | Slope<br>Length<br>(ft.) | Avg.<br>Grade<br>(%) | Design<br>Capacity<br>(pph) | Rope<br>Speed<br>(fpm) | Carrier<br>Spacing<br>(ft.) | Lift Maker/<br>Year Installed |
|---------------------------|---------------------------|------------------------------|---------------------------|--------------------------|----------------------|-----------------------------|------------------------|-----------------------------|-------------------------------|
| Black Mtn<br>Express/DC-4 | 11,551                    | 10,838                       | 713                       | 2,957                    | 25%                  | 2,000                       | 1,000                  | 120                         | LPOA/2010                     |
| Pallavicini/C-2           | 12,115                    | 10,790                       | 1,325                     | 3,510                    | 41%                  | 1,200                       | 500                    | 50                          | LPOA/2020                     |
| Beaver's Lift/C-4         | 12,458                    | 10,958                       | 1,500                     | 4,080                    | 39%                  | 1,800                       | 450                    | 67                          | LPOA/2018                     |
| Lenawee<br>Express/DC-6   | 12,465                    | 11,450                       | 1,015                     | 4,079                    | 26%                  | 2,380                       | 1,000                  | 151                         | LPOA/2022                     |
| Molly Hogan/C-4           | 10,870                    | 10,812                       | 58                        | 398                      | 15%                  | 800                         | 250                    | 75                          | LPOA/2020                     |
| Molly's Magic/C           | 10,836                    | 10,808                       | 28                        | 152                      | 19%                  | 1,500                       | 160                    | 6                           | 2003                          |
| Zuma Lift/C-4             | 12,475                    | 11,362                       | 1,113                     | 4,164                    | 28%                  | 1,900                       | 450                    | 57                          | LPOA/2007                     |
| Pika Place/C              | 10,846                    | 10,842                       | 4                         | 71                       | 6%                   | 1,500                       | 160                    | 6                           | 2012                          |
| Lazy J Tow/S              | 12,478                    | 12,462                       | 16                        | 375                      | 4%                   | 1,200                       | 325                    | 16                          | 2007                          |

Source: SE Group

Notes:

Lift Types: DC-6 = detachable six-passenger chairlift / DC-4 = detachable four-passenger chairlift / C-4 = fixed-grip quad chairlift / C-2 = fixed-grip double chairlift / C = carpet / S = surface lift

## C. EXISTING TERRAIN NETWORK

A-Basin divides its terrain into seven distinct mountain areas, each with its own unique characteristics. The frontside is the first impression for visitors arriving at A-Basin and contains the most diverse ability distribution of the seven areas. The vast majority of novice to intermediate terrain is in this area. Guests must ride two chairlifts, Black Mountain Express and Lenawee Express, to access the upper ridge that separates the frontside from other areas.

The learning hill at the base is where the ski school is located. Beginner skiers and riders start their day on one of the beginner carpets and graduate to Molly Hogan once comfortable riding a chairlift. Beginner terrain suitable for first time skiers has a maximum slope grade of less than 12%. By this metric, A-Basin provides skiers and riders a limited half-acre of true beginner terrain. A small beginner area limits the number of lessons that can be taught and can result in an overly busy learning area. For beginner skiers, this can be intimidating and unpleasant learning environment. Although most guests at A-Basin are not beginners, providing enough beginner terrain to attract and retain new skiers is essential.

Once skiers move beyond the beginner area, they can ride the Black Mountain Express up to the Black Mountain Lodge and explore the novice runs that descend back to the base area. However, at nearly 3,000 feet in length, Black Mountain Express is a significant jump from the 400-foot-long Molly Hogan chair. Given the length of the runs and the exceptionally high elevation at A-Basin, these long runs pose a substantial challenge to beginner skiers and riders, even if they are of suitable grades.

The iconic Pallavicini area, also known as “Pali”, on the north portion of the resort is a favorite of A-Basin regulars. The Pallavicini Lift ascends directly out of the base area near The Beach. Its runs are rugged, steep, and gladed. Skiers who don’t feel up to the advanced-to-expert runs can return to the base area on *Grizzly Road*. Expert skiers can drop into the Steep Gullies’ hike-back terrain through controlled access gates.

Catering to A-Basin’s adventure-seekers, The East Wall is accessed through numerous controlled access gates. Hiking opportunities exist at *Willy’s Wide*, *Tree Chutes*, and through the North Pole Hiking Gate. Because it requires significantly more snow coverage than most of the resort, it does not typically open until around February. The area requires considerable avalanche mitigation.

Montezuma Bowl and the Zuma Lift were added in the 2007-2008 season. The area has 400 acres of south-facing open terrain that provides a different experience than the rest of the resort. Much of the area is above treeline, but there are still some advanced gladed runs at the bottom portion of the bowl. Controlled access gates provide access to a small hike-back zone below the lift terminal. It can be accessed from the top terminal of the Beavers Lift and from the top of Lenawee Express after taking a ride on Lazy J Tow.

The Beavers terrain was officially added to A-Basin’s developed terrain network during the 2017-2018 season. It includes over 300 acres of terrain that was previously backcountry-only. The Beavers lift provides access to 36 runs, including a few groomers and abundant gladed terrain. Guests must ride Lenawee Express or Pallavicini from the base to ski into this area.

The Steep Gullies area was added at the same time as the Beavers area. Once entirely intended for backcountry skiing, it is now patrolled and maintained to provide a safer experience. To access it, skiers pass through controlled access gates on the west side of the Pallavicini area. It requires a hike back to the base so the area keeps its backcountry essence.

Table A-1 details the terrain of A-Basin’s trail network.

1. TERRAIN VARIETY

This analysis only accounts for the developed terrain network at A-Basin. There are 1,428 skiable acres at the resort, 871 of which are considered developed because they are generally groomable and easily accessible from a chairlift. The remainder is considered undeveloped because it is not maintained, but it is routinely skied. This includes glades, bowls, chutes, or other areas generally only accessible to higher ability level guests.

Importance of Terrain Variety

Terrain variety is considered the key factor in evaluating the quality of the actual skiing and riding guest experience (as opposed to total acreage, vertical, grooming, or any other factor).

Terrain variety is consistently ranked as one of the most important criteria in skiers’ choice of a ski destination, typically behind only snow quality, and ahead of such other considerations as lifts, value, accessibility, resort service, and others. This is a relatively recent industry trend, representing an evolution in skier/rider tastes and expectations. The implication of the importance of terrain variety is that a resort must have a diverse, interesting, and well-designed developed trail system, but also must have a wide variety of alternate-style terrain, such as mogul runs, bowls, gladed trees, open parks, in-bounds “backcountry-style” (i.e., hike-to) terrain, and terrain parks and pipes. At resorts across the nation, there is a growing trend favoring these more natural, unstructured types of terrain, since the availability of this style of terrain has become one of the more important factors in terms of a resort’s ability to retain guests, both for longer durations of visitation and for repeat business.

To provide the highest quality guest experience, resorts should offer groomed runs of all ability levels and some level of each of the undeveloped terrain types. Undeveloped terrain is primarily used by advanced and expert level skiers/riders during desirable conditions (e.g., periods of fresh snow, spring corn, etc.). Even though some of these types of terrain only provide skiing/riding opportunities when conditions warrant, they represent the most intriguing terrain, and typically are the areas that skiers/riders strive to access.



### 2. TERRAIN DISTRIBUTION BY ABILITY LEVEL

The following table and charts illustrate the distribution of terrain by skier ability level for the developed trail network, as well as the distribution of the active skier population at A-Basin. The terrain distribution is compared to industry norm market. Due to its terrain, A-Basin's market skews toward advanced ability levels compared to the typical market because of its terrain.

The trail network at A-Basin accommodates a range of skier ability levels—from beginner to expert. There are shortages of beginner through intermediate terrain and corresponding surpluses of advanced and expert terrain. This is less of an issue for A-Basin's clientele; however, the shortages of lower-ability terrain can cause difficulty in progressing to higher levels. Some of A-Basin's terrain, such as *Sundance*, is shown as a green novice trail but has steeper sections than typical novice limits. It appears to be negotiable by lower-level skiers at A-Basin due to grooming, width, and other factors. Due to the topography, there are few opportunities to expand lower-ability terrain. However, A-Basin may consider opportunities to increase access to existing beginner-to-intermediate grades if constructing more is not possible.

#### Ability Level


It should be noted there is a significant difference between the ski run ability level ranking approach used in this document and that used by all U.S ski areas on their trail map and on-mountain trail signs. The established approach used at all resorts in the country is to make the ranking be relative to that resort – i.e., the easiest runs at that resort are signed as green circles and the most difficult are signed as black diamonds, the intermediate runs being blue squares. SE Group uses a different approach in this document (and in all other Master Plan documents produced by SE Group). This approach is aimed at comparing the terrain available at a given resort to the overall skier market, to determine if there are opportunities to appeal to a broader range of skiers. SE Group also uses six categories of ability level, as opposed to the standard three used by mountain resorts. Using various criteria, including maximum sustained gradient, run width, sightlines, and others, SE Group makes an internal determination of which ability level each run falls into. From that data, calculations are then done to determine terrain demand and ability level distribution. These calculations are accomplished by multiplying terrain acreage by an assigned density. These numbers are then compared to the skier market, to determine surpluses and deficiencies of terrain by ability level, as compared to the overall skier market.

**Table 2. Terrain Distribution by Ability Level—Existing Conditions**

| Skier/Rider Ability Level | Trail Area (acres) | Skier/Rider On-Trail (guests) | Skier/Rider Distribution (%) | Skier/Rider Market (%) | A-Basin Market <sup>21</sup> (%) |
|---------------------------|--------------------|-------------------------------|------------------------------|------------------------|----------------------------------|
| Beginner                  | 0.6                | 22                            | 0%                           | 5%                     | 2%                               |
| Novice                    | 37.8               | 681                           | 13%                          | 15%                    | 7%                               |
| Low Intermediate          | 37.3               | 522                           | 10%                          | 25%                    | 18%                              |
| Intermediate              | 129.8              | 1,298                         | 25%                          | 35%                    | 20%                              |
| Advanced                  | 299.0              | 1,495                         | 29%                          | 15%                    | 30%                              |
| Expert                    | 366.1              | 1,098                         | 21%                          | 5%                     | 23%                              |
| <b>TOTAL</b>              | <b>870.7</b>       | <b>5,117</b>                  | <b>100%</b>                  | <b>100%</b>            | <b>100%</b>                      |

Source: SE Group

**Chart 1. Terrain Distribution by Ability Level – Existing Conditions**

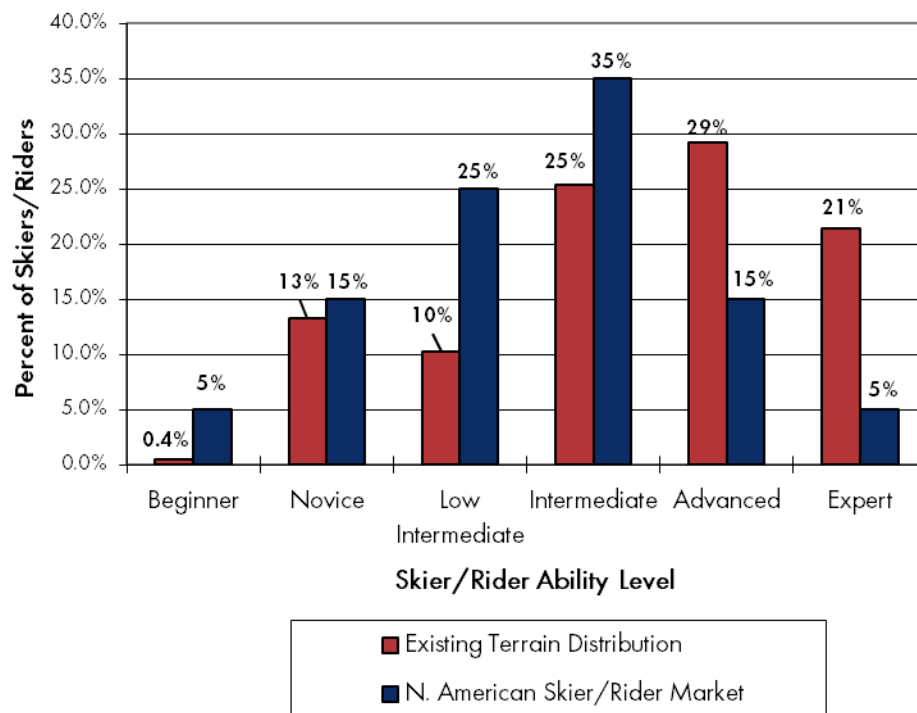

<sup>21</sup> Assessment based on data gathered through a 2012 guest survey.

### D. EXISTING DESIGN DAY ANALYSIS

#### 1. LIFT NETWORK CAPABILITY

The accurate calculation of a ski area's design day entails the balancing of all resort functions. As part of determining a resort's design day, the evaluation of the lift network is an important and complex analysis and is used initially to evaluate and planned other related skier service facilities. The detailed calculation of A-Basin's current lift network capabilities is described in the table below.

As illustrated in Table 3, the calculated design day for the lift network at A-Basin is 4,120. It is typical for ski areas to experience peak days during which skier visitation exceeds the lift network capability by as much as 25% or more. However, it is not recommended to consistently exceed the design day due to the resulting decrease in the quality of the recreational experience, and thus the resort's market appeal.

#### What is a Design Day?

In ski area planning, a design day represents a typical busy winter weekend day. It serves as a planning parameter to guide the balanced sizing of a ski resort's primary facilities, such as ski lifts, ski terrain, guest services, restaurant seating, building space, utilities, and parking. The design day reflects a level of facility utilization that ensures a pleasant recreational experience without overburdening the resort infrastructure. It does not represent the resort's maximum visitation capacity but rather the number of visitors that can be reasonably accommodated when all functions and facilities are operating smoothly.

The design day is a planning parameter, not a measure of operational scenarios or functional capacity. It should not be used to set visitation limits or guide regulatory decisions. Calculations related to the design day are intended solely for resort planning purposes, and the use of design day for other purposes would be taking design day visitation out of context.

**Table 3. Lift Network Capability—Existing Conditions**

| Lift Name,<br>Lift Type   | Slope<br>Length<br>(ft.) | Vertical<br>Rise<br>(ft.) | Design<br>Capacity<br>(pph) | Operating<br>Hours<br>(hrs.) | Up-<br>Mountain<br>Access<br>Role<br>(%) | Misloading/<br>Lift<br>Stoppages<br>(%) | Adjusted<br>Hourly<br>(pph) | VTF/<br>Day<br>(000) | Vertical<br>Demand<br>(ft./day) | Lift<br>Network<br>Capability<br>(guests) |
|---------------------------|--------------------------|---------------------------|-----------------------------|------------------------------|------------------------------------------|-----------------------------------------|-----------------------------|----------------------|---------------------------------|-------------------------------------------|
| Black Mtn<br>Express/DC-4 | 2,957                    | 713                       | 2,000                       | 7.50                         | 10                                       | 5                                       | 1,700                       | 9,097                | 11,214                          | 810                                       |
| Pallavicini/C-2           | 3,510                    | 1,325                     | 1,200                       | 7.00                         | 5                                        | 5                                       | 1,080                       | 10,017               | 18,979                          | 530                                       |
| Beaver's Lift/C-4         | 4,080                    | 1,500                     | 1,800                       | 6.50                         | 0                                        | 5                                       | 1,710                       | 16,673               | 21,484                          | 780                                       |
| Lenawee<br>Express/DC-6   | 4,079                    | 1,015                     | 2,380                       | 6.50                         | 10                                       | 10                                      | 1,904                       | 12,567               | 15,009                          | 840                                       |
| Molly Hogan/C-4           | 398                      | 58                        | 800                         | 6.50                         | 0                                        | 20                                      | 640                         | 241                  | 1,381                           | 170                                       |
| Molly's Magic/C           | 152                      | 28                        | 1,500                       | 6.50                         | 0                                        | 15                                      | 1,275                       | 233                  | 2,658                           | 90                                        |
| Zuma Lift/C-4             | 4,164                    | 1,113                     | 1,900                       | 6.50                         | 0                                        | 5                                       | 1,805                       | 13,061               | 15,583                          | 840                                       |
| Pika Place/C              | 71                       | 4                         | 1,500                       | 6.50                         | 0                                        | 15                                      | 1,275                       | 37                   | 622                             | 60                                        |
| Lazy J Tow/S              | 375                      | 16                        | 1,200                       | 6.50                         | 100                                      | 0                                       | -                           | 0                    | 1,602                           | -                                         |
| <b>TOTAL</b>              | <b>19,786</b>            |                           | <b>14,280</b>               |                              |                                          |                                         | <b>11,389</b>               | <b>61,926</b>        |                                 | <b>4,120</b>                              |

Source: SE Group

Notes:

Lift Types: DC-6 = detachable six-passenger chairlift / DC-4 = detachable four-passenger chairlift / C-4 = fixed-grip quad chairlift / C-2 = fixed-grip double chairlift / C = carpet / S = surface lift

### 2. DENSITY ANALYSIS

The density analysis compares the uphill lift network supply and downhill trail availability at Arapahoe Basin. At any one time, skiers and riders are dispersed throughout the ski area, using guest facilities and milling areas, waiting in lift mazes, riding lifts, or descending on ski terrain. For the trail density analysis, 25% of each lift's user group is presumed to be "inactive" (i.e., using guest service facilities or milling areas and otherwise not actively skiing or riding lifts).

#### Balancing Uphill and Downhill Supply and Demand

An important aspect of resort design is the balancing of uphill lift network supply with downhill trail availability. Trail densities are derived by comparing the uphill, at-one-time lifting capabilities of each individual lift pod with the trail acreage associated with that lift pod. The trail density analysis considers only the acreage associated with the developed trail network. A high trail density can restrict skiing space, degrade snow conditions, and detract from the recreational experience. A low trail density can indicate under-utilization of the existing terrain and inefficient operations.

Trail density is calculated for each lift pod by dividing the number of guests on the trails by the amount of trail area within the lift pod. The trail density analysis provides each lift pod with a "density index" score, comparing the calculated trail density for each lift pod to the desired trail density for that pod (i.e., the product of the ideal trail density for each ability level and the lift's trail distribution by ability level). This density index is then averaged across lift pods, resulting in a density index for the ski area.

An optimal density index is 100%, as lifts and terrain are perfectly balanced in this condition. A lift pod density index above 100% indicates that the lift can serve more guests than its terrain can comfortably accommodate. A lift pod density index below 100% indicates that terrain can comfortably accommodate more guests than its lift can serve. The density index at A-Basin is 52%. While this is under the optimal density, it is not uncommon for a resort to have densities under the target because lower trail densities generally reflect a higher quality recreation experience. A-Basin is also known for its high alpine, open bowls that provides more skiable acreage than at most resorts, driving down the density Index. Many resorts with abundant hike-to and open bowl terrain tend to have lower densities.



### a) Lift Network Efficiency

Within the context of ski area design, the term lift network efficiency refers to the amount of effort and cost required to operate and maintain the lift network, as compared to the number of guests served. The energy and costs related to the ski area efficiency include, but are not limited to power use, operational labor, maintenance costs and labor, increased indirect administrative costs, and various direct and indirect costs associated with higher staff levels to perform these tasks. From this standpoint, the most efficient scenario is to have the fewest number of lifts possible that can comfortably and effectively serve a design day and circulation requirements of the resort, while creating a balance of lift supply across the available terrain.

One way to analyze lift network efficiency is to calculate the average lifting capabilities per lift at a given resort. While this calculation does not relate to the overall lift network capability of the resort, it can indicate if: 1) the resort is not getting maximum utilization out of its lifts, or 2) there are more lifts than necessary for the visitation levels of the resort. When calculating this average, conveyors and surface tows are not included, as the lift network calculations (and operating costs) for them are so low that it would skew the overall average. Optimally, and as a planning goal, the average lift network capability per lift would likely be close to 1,000. Industry-wide, the average capability per lift is approximately 650. The average capability per lift at A-Basin is about 662. This indicates that A-Basin has an average lift network efficiency, and that there is likely a similar lift cost, in terms of both energy use and financial/operational cost, per skier to most resorts. Primary contributing factors to this include: the well-designed, effective lift layout; the length and functionality of the primary lifts; and the fact that all lifts can be skied (there are no transport-only lifts).

### b) Terrain Network Efficiency

Terrain network efficiency refers to the amount of effort required to properly maintain the terrain (snowmaking costs, grooming costs, energy costs, ski patrol costs, summer trail maintenance costs, increased administrative costs, costs associated with higher staff levels to perform these tasks, etc.). From this standpoint, the most efficient scenario is to have a quantity of terrain that closely meets the target density requirements. The overall density index of 52% indicates that more terrain is maintained than can be effectively served by the existing lift network, however, much of this is due to bowls, glades, and hike-to terrain included in the lift network.

**Table 4. Density Analysis – Existing Conditions**

| Lift Name,<br>Lift Type | Lift<br>Network<br>Capability | Guest Dispersement                  |                      |                     |                           | Terrain<br>Area<br>(acres) | Density Analysis                   |                                    |                | Index<br>(%) |
|-------------------------|-------------------------------|-------------------------------------|----------------------|---------------------|---------------------------|----------------------------|------------------------------------|------------------------------------|----------------|--------------|
|                         |                               | Support<br>Fac./Milling<br>(guests) | In Lines<br>(guests) | On Lift<br>(guests) | On<br>Terrain<br>(guests) |                            | Terrain<br>Density<br>(guests/ac.) | Desired<br>Density<br>(guests/ac.) | Diff.<br>(+/-) |              |
| Black Mtn Express/DC-4  | 810                           | 203                                 | 227                  | 84                  | 296                       | 87.4                       | 3                                  | 11                                 | -8             | 27%          |
| Pallavicini/C-2         | 530                           | 133                                 | 162                  | 126                 | 109                       | 147.2                      | 1                                  | 3                                  | -2             | 33%          |
| Beaver's Lift/C-4       | 780                           | 195                                 | 114                  | 233                 | 238                       | 121.9                      | 2                                  | 5                                  | -3             | 40%          |
| Lenawee Express/DC-6    | 840                           | 210                                 | 159                  | 129                 | 342                       | 171.6                      | 2                                  | 7                                  | -5             | 29%          |
| Molly Hogan/C-4         | 170                           | 51                                  | 75                   | 17                  | 27                        | 3.5                        | 8                                  | 17                                 | -9             | 47%          |
| Molly's Magic/C         | 90                            | 30                                  | 21                   | 20                  | 19                        | 0.5                        | 37                                 | 35                                 | 2              | 106%         |
| Zuma Lift/C-4           | 840                           | 210                                 | 60                   | 278                 | 292                       | 338.3                      | 1                                  | 5                                  | -4             | 20%          |
| Pika Place/C            | 60                            | 20                                  | 21                   | 9                   | 10                        | 0.1                        | 85                                 | 35                                 | 50             | 243%         |
| <b>Total</b>            | <b>4,120</b>                  | <b>1,052</b>                        | <b>839</b>           | <b>663</b>          | <b>1,095</b>              | <b>870.5</b>               | <b>4</b>                           | <b>8</b>                           | <b>-4</b>      | <b>52%</b>   |

Source: SE Group

Notes:

Lift Types: DC-6 = detachable six-passenger chairlift / DC-4 = detachable four-passenger chairlift / C-4 = fixed-grip quad chairlift / C-2 = fixed-grip double chairlift / C = carpet

The Lazy J Tow is not included in the density analysis because it is a transport lift and does not contribute to the overall lift network capability.

### E. EXISTING GUEST SERVICES FACILITIES, FOOD SERVICE SEATING & SPACE USE ANALYSIS

#### 1. GUEST SERVICES

Most guest services are currently offered in A-Basin's base area. The A-Frame is the resort's primary base lodge, housing multiple food and beverage services as well as restrooms. Arapahoe Sports, a retail shop, is located at the front end of the A-Frame. There are separate ticketing, ski school, and rental buildings, which is an advantage during busy days because it prevents queues from merging into one another and causing overcrowding in one multi-purpose building.

There are a number of on-mountain guest service facilities distributed around the resort. The Black Mountain Lodge, accessible through a ride on the Black Mountain Express, provides food and beverage services as well as restrooms. Its mid-mountain location on the frontside of the resort makes it a popular stop for skiers of all ability levels and even non-skiers riding the chairlift. Steilhang Hut, a German-inspired food service facility, is located near the Upper East Wall gate with extraordinary views of the East Wall. Gender-neutral restrooms are available. It is only accessible by skiers with at least an intermediate ability level. Il Rifugio, the highest-elevation restaurant in North America, lies at the top of Lenawee Express and The Beavers lifts. In keeping with the resort's sustainability goals, the building has no running water, gender-neutral composting toilets, and is powered by solar. There are no facilities in Montezuma Bowl, but guests can easily access Il Rifugio after riding the Zuma Lift. In addition, The Beavers has no guest service space, but there are picnic tables to enjoy packed lunches or rest.

Figure 4 illustrates the current guest facilities, maintenance facility and parking at A-Basin.

### Space Use Planning

Guest Service facilities constitute an essential component of the experience at ski areas. These areas provide shelter from the elements, bathrooms, and food and beverages. These facilities and their capacities are important in understanding whether the needs of visitors are being met.

Service functions include:

**Restaurant Seating:** All areas designated for food service seating, including: restaurants, cafeterias, and brown bag areas. Major circulation aisles through seating areas are designated as circulation/waste, not seating space.

**Kitchen/Scramble:** Includes all food preparation, food service, and food storage.

**Bar/Lounge:** All serving and seating areas designated as restricted use for the serving and consumption of alcoholic beverages. If used for food service, seats are included in seat counts.

**Restrooms:** All space associated with restroom facilities (separate women, men, employees, and gender-neutral facilities).

**Guest Services:** Services including resort information desks, kiosks, and lost and found.

**Adult Ski School:** Includes ski school booking area and any indoor staging areas. Storage directly associated with ski school is included in this total.

**Kid's Ski School:** Includes all daycare/nursery facilities, including booking areas and lunch rooms associated with ski school functions. Storage and employee lockers directly associated with ski school are included.

**Rentals/Repair:** All rental shop, repair services, and associated storage areas.

**Retail Sales:** All retail shops and associated storage areas.

**Ticket Sales:** All ticketing and season pass sales areas and associated office space.

**Public Lockers:** All public locker rooms. Any public lockers located along the walls of circulation space are included, as well as the 2 feet directly in front of the locker doors.

**Ski Patrol/First Aid:** All first aid facilities, including clinic space. Storage and employee lockers directly associated with ski patrol are included in this total.

**Administration/Employee Lockers & Lounge/Storage:** All administration/employee/storage space not included in any of the above functions.

### 2. SPACE USE ANALYSIS

Sufficient guest service space should be provided to accommodate the existing resort design day of 4,120 guests per day plus an additional 2% of non-skiing guests, totaling 4,202 guests. Typically, the guest space analysis includes an additional 5% non-skiing guests. A-Basin has fewer non-skiing guests because the resort focuses its offerings on skiers. The distribution of the lift network is utilized to determine guest service needs and space requirements for skier services at base area portals and on-mountain facilities. The lift network is distributed between each guest service facility location according to the number of guests that utilize the lifts and terrain associated with each facility.

In addition to distributing the lift network amongst the base area and on-mountain facilities, guest service needs and the resulting spatial recommendations are determined through a process of reviewing and analyzing the current operations to determine guest service requirements that are specific to the resort. The table below outlines existing space use and recommendations.

Total guest service space allocations and recommendations are shown below in Table 5 and broken out by location in Tables A-2 through A-5. A-Basin is generally undersized compared to its design day, with the most notable deficiencies in public lockers, rentals, ski school, and restaurant seating. The restaurant seating deficiency is the largest deficit, requiring approximately twice the available space. While this is partially offset by outdoor decks, those spaces are not always available due to inclement weather. If there is not enough space for rental operations, the resort may not be able to store enough rental units to accommodate demand. Rentals can be a significant source of revenue for resorts. In addition, they play a role in the new skier's experience because those guests are less likely to have their own equipment. Sold out rental units and long lines point to less time on the snow. The remainder of functions are within the recommended range or above.

Employee spaces, including administration and employee lockers, are higher than recommended and largely concentrated within the base area. Although the space is technically higher than recommended, the administrative space within the base area consists primarily of shared offices with a handful of individual offices. It is difficult for resort employees to find quiet spaces for private conversations due to the abundance of shared space. Employee locker/lounge space appears higher than recommended, but only consist of locker rooms for storing mountain operations employees' uniforms and gear. There is no locker space for those in guest services, food and beverage, rentals, or other departments. The bathroom and changing area spaces are inadequate for employees' needs. There are no true employee break areas for employees to eat lunch, use computers, or rest. A-Basin may consider reconfiguring the base area or creating additional employee space. Providing adequate employee space may play a role in retaining resort employees, reducing turnover, and ensuring operations run smoothly.



**Table 5. Space Use Recommendations—Total Resort—Existing Conditions**

| Service Function            | Existing Total | Recommended Range |               |
|-----------------------------|----------------|-------------------|---------------|
|                             |                | Low               | High          |
| Ticket Sales/Guest Services | 1,195          | 930               | 1,130         |
| Public Lockers              | 723            | 2,780             | 3,400         |
| Rentals/Repair              | 2,956          | 5,560             | 6,800         |
| Retail Sales                | 2,180          | 1,890             | 2,310         |
| Bar/lounge                  | 3,067          | 2,840             | 3,470         |
| Adult Ski School            | 1,548          | 1,480             | 1,810         |
| Kid's Ski School            | 1,817          | 2,970             | 3,630         |
| Restaurant Seating          | 8,886          | 14,605            | 17,006        |
| Kitchen/Scramble            | 6,913          | 7,303             | 8,503         |
| Rest rooms                  | 3,289          | 2,470             | 3,010         |
| Ski Patrol                  | 2,828          | 1,510             | 1,850         |
| Administration              | 4,514          | 3,890             | 4,760         |
| Employee Lockers/Lounge     | 2,337          | 1,560             | 1,900         |
| Mechanical                  | 2,551          | 1,350             | 1,960         |
| Storage                     | 2,760          | 2,240             | 3,270         |
| Circulation/Waste           | 1,740          | 5,370             | 7,870         |
| <b>TOTAL SQUARE FEET</b>    | <b>49,304</b>  | <b>58,748</b>     | <b>72,680</b> |

Source: SE Group

### 3. FOOD SERVICE SEATING

At the base area, there are three food and beverage facilities located within the A-Frame. The A-Frame contains a range of grab-and-go to table service facilities between Coffee Corner, 6<sup>th</sup> Alley Bar and Grill, Marnie's, and The Legends Café. On-mountain, skiers and non-skier guests may enjoy mid-mountain views at Black Mountain Lodge. Only Intermediate to expert skiers can access Steilhang Hut or Il Rifugio.

#### Turnover Rates

A key factor in evaluating restaurant capacity is the turnover rate of its seats, or the number of times a seat will be utilized in a day. Several factors influence the turnover rate including the ski resort's climate, market orientation, and the type of food service provided. For example, colder weather results in guests spending longer periods of time in the lodge, resulting in lower turnover rates. Also, cafeteria-style dining will have a faster turnover rate than fine dining. At A-Basin, a turnover rate of 3 to 4 was used depending on the facility.

A key factor in evaluating restaurant capacity is the turnover rate of the seats. A turnover rate of three to five times is the standard range utilized in determining restaurant capacity. Fine dining at ski areas typically results in a turnover rate of three, while “fast food” cafeteria style dining is characterized by a higher turnover rate. Furthermore, weather has an influence on turnover rates at ski areas; for example, on snowy days skiers will spend more time indoors than on sunny days.

An analysis of seating at A-Basin was conducted. Overall, there is a deficit of approximately 391 indoor seats at the resort. The following table summarizes the seating requirements at A-Basin, to reach the requirements of a design day. Base area and Black Mountain Lodge comprise much of this deficit, indicating a need for more seating at each. Steilhang Hut and Il Rifugio are only accessible to intermediate to advanced skiers and do not require much more seating.

While A-Basin should add more seating to improve the guest experience and reduce crowding, the lack of seating at the resort is generally less severe than shown due to available outdoor seating and the nature of its clientele. Outdoor seating is only available on a “nice day” and there are fewer days with inclement weather (i.e. wind, rain, or very cold temperatures) in the Rocky Mountain region than others. These outdoor seats are available more often than not during Colorado's 300 days of sunshine and create a surplus of seating if they are available. In addition, A-Basin attracts a larger proportion of higher ability level skiers than most resorts. Those skiers who are more experienced and/or ski more frequently are more likely to bring a brown bag lunch to the mountain, or have their grill set up at The Beach and may not use a seat at lunchtime.

**Table 6. Restaurant Seats—Existing Conditions**

|                                                      | Base Area | Black Mountain Lodge | Steilhang Hut | Il Rifugio | Resort Total |
|------------------------------------------------------|-----------|----------------------|---------------|------------|--------------|
| Lunchtime Demand                                     | 2,528     | 1,330                | 197           | 148        | 4,202        |
| Average Seat Turnover                                | 3.5       | 3.5                  | 4             | 3          |              |
| Existing Indoor Seats                                | 474       | 240                  | 48            | 48         | 810          |
| Recommended Seats                                    | 722       | 380                  | 49            | 49         | 1,201        |
| Difference Existing Indoor Seats and Recommend Seats | -248      | -140                 | -1            | -1         | -391         |
| Existing Outdoor Seats                               | 130       | 200                  | 48            | 48         | 426          |

## F. EXISTING PARKING AND RESORT ACCESS

Total available parking should be balanced to a resort's design day. Existing parking calculations and assumptions are shown in Table 7. Like many ski resorts, parking is a significant limiting factor at Arapahoe Basin. When parking is reduced, guests simply cannot access the resort. Guests who drive to A-Basin park in the day-skier parking area. There are no accommodations near Arapahoe Basin, so guests that do not arrive by car are almost exclusively arriving from the SnowStang or Summit Stage bus service.

To increase average vehicle occupancy (AVO) and reduce the parking demand, A-Basin continues to re-evaluate their parking program. Currently A-Basin charges a fee for all parking on weekends and holidays, and incentivizes carpooling by offering free parking to vehicles with four or more passengers. Since implementing this change, A-Basin has seen an increase in guests who carpool on peak days. On peak days, guests park on the highway as a last resort. This is not desirable for A-Basin and its guests due to the frequent traffic over Loveland Pass. A-Basin has worked to minimize the number of days guests park on the highway; however, it still occurs.

The plan also encourages guest and employee bus ridership on the Summit Stage and Front Range SnowStang, organizes employee carpooling information, and implements an employee express shuttle from down valley. According to an Arapahoe Basin Transportation Efficiency Study, Snowstang ridership averaged 26% capacity (approximately 13 riders per trip), lower than nearby resorts Copper Mountain and Loveland Pass. A guest survey showed that the reasons that prevent skiers from riding the bus include low frequency of buses, length of the journey, and distance from the bus stop. Improving bus ridership can remedy the lack of parking space, but will realistically not fix it alone.

The drop-off/admin lot is a paid lot seven days a week. The area experiences congestion due to vehicles dropping off passengers, foot traffic, and parking. The lot could be reconfigured to improve efficiency. The Whiskey Lot and Foxtrot are used as overflow parking when needed but is too far to walk and requires the shuttle service. Unfortunately, the shuttle service must make frequent stops and contributes to the congestion in the base area. Some overflow parking occurs on the highway, but is technically not permitted and may result in tickets or tows.

Based on a design day of 4,120 skiers and 2% additional non-skier guests, A-Basin requires parking for 4,202 guests on a high-volume day. Recent visitation, parking count, and bus ridership data resulted in an assumed AVO of 2.5 persons per vehicle and a ridership rate of 5%. Based on these factors, there is a deficit of approximately 16 parking spaces. Higher visitation days are made possible by a combination of higher AVO and bus ridership and parking on the highway.

**Table 7. Recommended Parking—Existing Conditions**

|                                      | Total |
|--------------------------------------|-------|
| Parking Demand                       | 4,202 |
| # of guests arriving by car (95%)    | 3,992 |
| # of guest arriving by bus (5%)      | 210   |
| Required car parking spaces          | 1,597 |
| Required employee car parking spaces | 93    |
| Total required spaces                | 1,690 |
| Existing parking spaces              | 1,674 |
| Surplus/deficit                      | -16   |

## G. EXISTING RESORT OPERATIONS

### 1. SNOWMAKING

The snowmaking system at A-Basin helps ensure a predictable opening date, high quality conditions early and mid-season.

The 1999 ROD approved 125 acres of snowmaking coverage at A-Basin. A-Basin constructed its snowmaking system in 2002. The snowmaking system at the resort covers approximately 75 acres of terrain. Nine of those acres do not have permanent snowmaking infrastructure installed and are covered by stretching hoses from hydrants in other areas or by pushing man-made snow to these areas with snow cats. A-Basin is not able to make snow to the extent approved in the 1999 ROD and allowed under the resort's water rights due to withdrawal conditions in the 1999 ROD. Refer to Figure 5 for the existing and previously approved snowmaking coverage areas.

Additional snowmaking is needed on key trails such *Upper Wrangler*, *Grizzly Road*, *West Wall* and in Montezuma Bowl and on *Loafer* and *Davis* in the Beavers. Montezuma Bowl has scant vegetation and is primarily south and west facing, so it can take time for snow coverage to be sufficient for grooming and skiing. Snowmaking on popular runs off Zuma would ensure that this lift can remain open early or late in the season. The Zuma lift attributes 830 guests to the overall lift network, meaning crowding may occur on other parts of the mountain when the terrain has insufficient snow. While *Loafer* and *Davis* in the Beavers area are not south facing, they can experience poor coverage. These intermediate runs are very

popular among less advanced skiers because other terrain in this area is gladed and advanced. Coverage on these two runs will ensure that intermediate skiers can access the Beavers reliably.

Part of the reason A-Basin has not constructed snowmaking infrastructure on the remaining previously approved runs is because the withdrawal conditions in the 1999 ROD limit A-Basin's use of its water rights. A-Basin has water rights that authorize it to divert water from the North Fork of the Snake River in the base area. A-Basin maintains a 0.5 cubic feet per second bypass flow during the majority of the snowmaking season; in October, A-Basin maintains a bypass flow of 1.0 cubic feet per second. In addition to the bypass flow, the withdrawal conditions, which restrain A-Basin's use of its water rights, provide that A-Basin's water withdrawals must be less than or equal to 25% of the stream flow.

A storage reservoir, located adjacent to the maintenance building, with a capacity of 5.5-acre feet is used to provide buffer storage. However, this storage is inadequate during periods when conditions allow A-Basin to run its snowmaking system at full capacity. A-Basin has investigated a number of other locations around the mountain to provide additional storage; however, these have proven to be inadequate or too environmentally impactful to pursue.

### 2. MAINTENANCE FACILITIES

A-Basin's maintenance facility is located at the west end of the Early Riser Parking Lot adjacent to the snowmaking pond. The facility is approximately 8,500 square feet that accommodates maintenance areas for snow cats, vehicles, snowmaking, lifts, equipment storage, and the waste water treatment system. The waste water facility meets the existing and foreseeable future needs of A-Basin, but the maintenance area may need to be expanded to accommodate future requirements.

### 3. INFRASTRUCTURE AND UTILITIES

Electric power is supplied to A-Basin by Xcel Energy. The existing service line has a capacity to supply a power load of 1,875 kilowatts. The power supply can be upgraded by 15% without running new lines to the ski area. The current load at A-Basin is approximately 1,800 to 2,000 kilowatts. All power distribution lines to lifts and buildings at the ski area are underground.

### 4. DOMESTIC WATER AND WASTE WATER TREATMENT

Domestic water is supplied to base area facilities from the North Fork of the Snake River. Water is diverted at a rate of 30 gallons per minute to a treatment system in the basement of the A-Frame. From the A-Frame, water is pumped to a 100,000-gallon storage tank on the east side of the Ramrod trail, at an elevation of 10,970 feet. From the tank, water is supplied to all base area facilities, including the maintenance building. With an average water consumption of eight gallons per person per day, this 24-hour supply is adequate for a daily population of 5,400 people which is 142% of the existing design day.

The Black Mountain Lodge domestic water supply comes from a nearby well that provides water at a rate of 15 to 30 gallons per minute that feeds into three underground storage tanks with 20,000 gallons of capacity each.

A-Basin has an onsite waste water treatment facility permitted and monitored by the State of Colorado. It is shown as part of the Maintenance Facility on Figure 4. The plant has a maximum hydraulic capacity of 35,000 gallons per day. In 1997 A-Basin installed a 25,000-gallon storage tank to accommodate short term high flows that may exceed the daily capacity. For example, if the resort has a peak day flow that exceeds

35,000 gallons, it can hold up to 25,000 additional gallons and treat the excess flow on subsequent days. Over the past three years the highest 30-day average flow was 13,000 gallons. Waste water lines currently connect the plant to the base area facilities and to Black Mountain Lodge. The restrooms located at Patrol Headquarters at the summit as well as both the Il Rifugio and Steilhang are composting toilets and are not connected to the plant.


### 5. MOUNTAIN ROADS

There are 6 miles within Arapahoe Basin's mountain road network. The roads generally function well and provides around the mountain for A-Basin's operations and maintenance teams.

## H. RESORT BALANCE

The resort balance chart compares a resort's various functions, including lifts, terrain, skier services, food service seating, and parking/access, to inform a resort's design day. These resort functions have been discussed in detail above and are summarized in Chart 3. All functions, with the exception of terrain network, are nearly balanced at A-Basin but have some limiting factors. The terrain network is nearly twice the lift network capability, indicating that the terrain can very easily accommodate the lift network capability. Guest services is the most limiting factor at the resort, with an overall lack of space. The second largest deficiency at A-Basin is indoor restaurant seating, but it is offset by the abundance of outdoor seats and guests who bring their own meal. Parking becomes a limiting factor when AVO is low and/or when visitation is higher than the lift network capability. While conditions appear to be balanced, high volumes of visitors could cause the resort's facilities to fall out of equilibrium. Projects within the upgrade plan should address existing deficiencies as well as prevent additional scarcities in the future.

**Chart 2. Resort Balance—Existing Conditions**

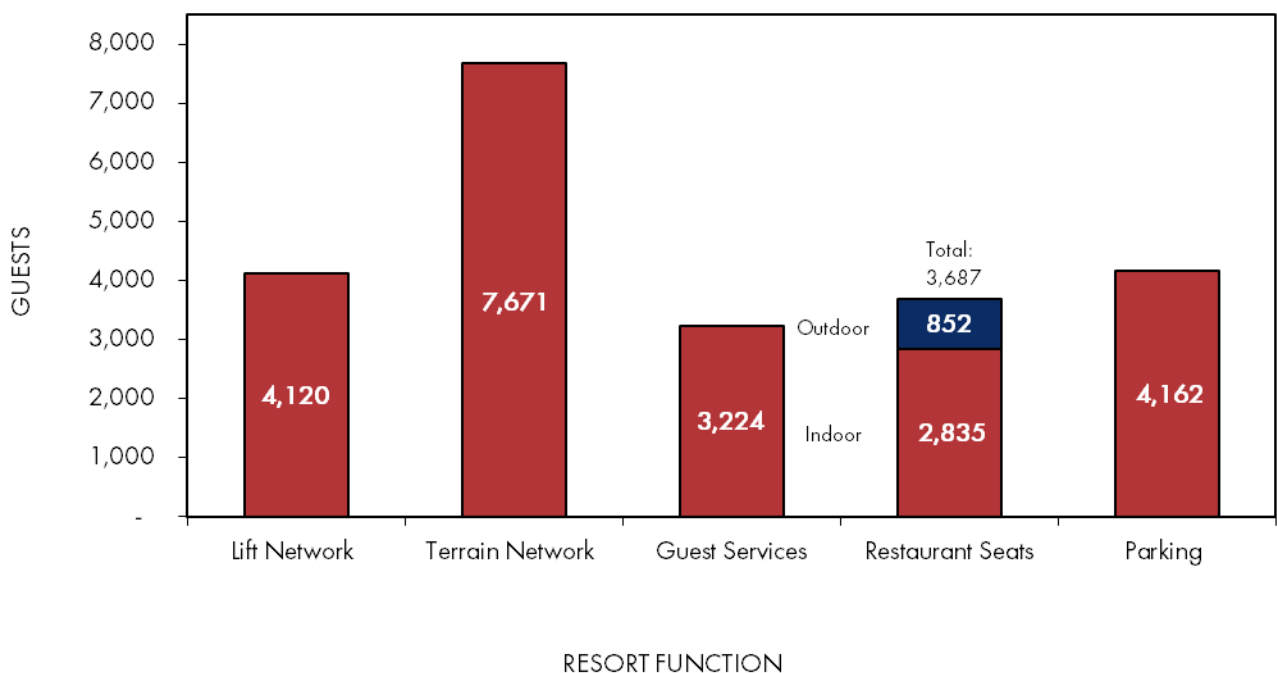



# I. SUMMER AND MULTI-SEASON OPERATIONS

## 1. SUMMARY OF THE EXISTING MULTI-SEASON ACTIVITIES AND THE GUEST EXPERIENCE

A-Basin currently provides a handful of alternative recreation opportunities, most of which are contained within the lower mountain, from the Black Mountain Lodge to the base area.

Activities include:

Scenic chairlift rides; guests ride the Black Mountain Express and enjoy the scenery from the Black Mountain Lodge. This is typically scheduled during the summer season.

Disc golf course; a 20-hole course that starts at the base area and meanders around North Fork and the Pallavicini Chair and back to the base.

Weddings and other events; the resort acts as the backdrop to weddings and other events throughout the summer.

Events at the base area and Black Mountain Lodge; numerous events are scheduled to take place from the spring through the late summer. Events include Oktoberfest, trail running and mountain bike races, as well as live concerts.

Hiking and Biking Trails; A-Basin has 5.7 miles of hiking trails and 10.2 miles of biking trails through its SUP area ranging in difficulty from easy to difficult. Guests may choose a guided wildflower hike or explore the slopes on their own.

Via Ferrata; first debuted in Summer 2021, the Via Ferrata is located on the East Wall and offers a unique mountain climbing experience using harnesses, iron rungs, and fixed steel cables. This activity is perfect for guests who want an adventurous day paired with the security of being guided. There are two tours available; one with 900 feet of elevation gain that ends at an abandoned mine and a full day tour to the ridgeline with 1,200 feet of elevation gain.

Aerial Adventure Park and Lil' Kids Adventure Park; these parks are a self-guided activity allowing guests to explore the treetop canopy using ropes, ladders, or other features.

## 2. THE SUMMER ZONES CONCEPT

Summer Activity Zones are designed to guide decisions about where various summer activities do and don't belong. Using the resort's physical resources and built infrastructure as a guide, they divide a resort's SUP area into distinct polygons. Each polygon is scored along four categories: access, remoteness, naturalness, and infrastructure. Then, scores are summed to designate each polygon's "Zone." There are five levels of Summer Activity Zones, with Zone 1 being most impacted by human activity and Zone 5 being least impacted. The Zone designations in this MDP originate from the A-Basin 2016 Master Development Plan Amendment (2016 MDPA).

### 3. EXISTING SUMMER ACTIVITY ZONES

A-Basin has a total of 16 existing Summer Activity Zones. They are distributed as follows: two Zone 1 areas, two Zone 2 areas, four Zone 3 areas, three Zone 4 areas, and five Zone 5 areas. Refer to Table 8 for the scoring of each Zone. Refer to Appendix B for a detailed explanation of each Zone's setting, desired experiences, and compatible activities and facilities.

#### a) Zone 1

Two areas within A-Basin's SUP were designated as Zone 1: Areas 1A and 1B. These areas comprise the parking lot, base area, and Black Mountain Lodge.

#### b) Zone 2

Two areas within A-Basin's SUP were designated as Zone 2: Areas 2B and 2C where summer trails, roads, chairlifts, and other resort infrastructure presently exists. These areas are also the middle portion of the ski area, which is heavily developed.

#### c) Zone 3

Four areas within the SUP area were designated as Zone 3: Areas 3A, 3C, and 3B. Not all areas which received a Zone 3 designation are equal in characteristics. For example, Area 3C is less accessible and includes a higher degree of remoteness when compared to Area 3C; however, both locations scored in the range to be characterized as Zone 3. 3B parallels Highway 6, which alters the accessibility, naturalness, and infrastructure characteristics in comparison to the adjacent Area 1. 3A hosts a hiking and mountain biking portal for one of the popular trails at A-Basin.

#### d) Zone 4

Three areas within the A-Basin SUP area were designated as Zone 4: Areas 4A, 4B, and 4C. Areas 4B and 4C (the Beavers and Montezuma Bowl) include ski trails and glading, but development is limited and large tree islands are dominant features. 4A (East Wall) possesses a strong feeling of remoteness due to the abundance of nature, remoteness, and topography of the steep alpine terrain.


#### e) Zone 5

Three areas within the A-Basin SUP area were classified as Zone 5. 5A, 5B, and 5C were all classified as Zone 5 due to the minimum characteristics valued in the zones scale system (Access, Remoteness, Naturalness, and Infrastructure). All of these areas are on the outskirts of A-Basin's SUP and have minimum to no alteration from their natural environment.

**Table 8. Summer Use Zones**

| Area Boundaries    | Score     | Appropriate Zone |
|--------------------|-----------|------------------|
| <b>Area 1A</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>4</b>  | <b>Zone 1</b>    |
| <b>Area 1B</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>4</b>  | <b>Zone 1</b>    |
| <b>Area 2A</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 2         |                  |
| <b>Total Score</b> | <b>5</b>  | <b>Zone 2</b>    |
| <b>Area 2B</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>6</b>  | <b>Zone 2</b>    |
| <b>Area 2C</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>6</b>  | <b>Zone 2</b>    |
| <b>Area 3A</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>8</b>  | <b>Zone 3</b>    |
| <b>Area 3B</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 2         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 2         |                  |
| <b>Total Score</b> | <b>8</b>  | <b>Zone 3</b>    |
| <b>Area 3C</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 2         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>9</b>  | <b>Zone 3</b>    |
| <b>Area 4A</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>11</b> | <b>Zone 4</b>    |
| <b>Area 4B</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 2         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>10</b> | <b>Zone 4</b>    |
| <b>Area 4C</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 2         |                  |
| <b>Total Score</b> | <b>11</b> | <b>Zone 4</b>    |
| <b>Area 5A</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>12</b> | <b>Zone 5</b>    |
| <b>Area 5B</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>12</b> | <b>Zone 5</b>    |
| <b>Area 5C</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>12</b> | <b>Zone 5</b>    |

## Previously Approved, Not Yet Implemented Projects

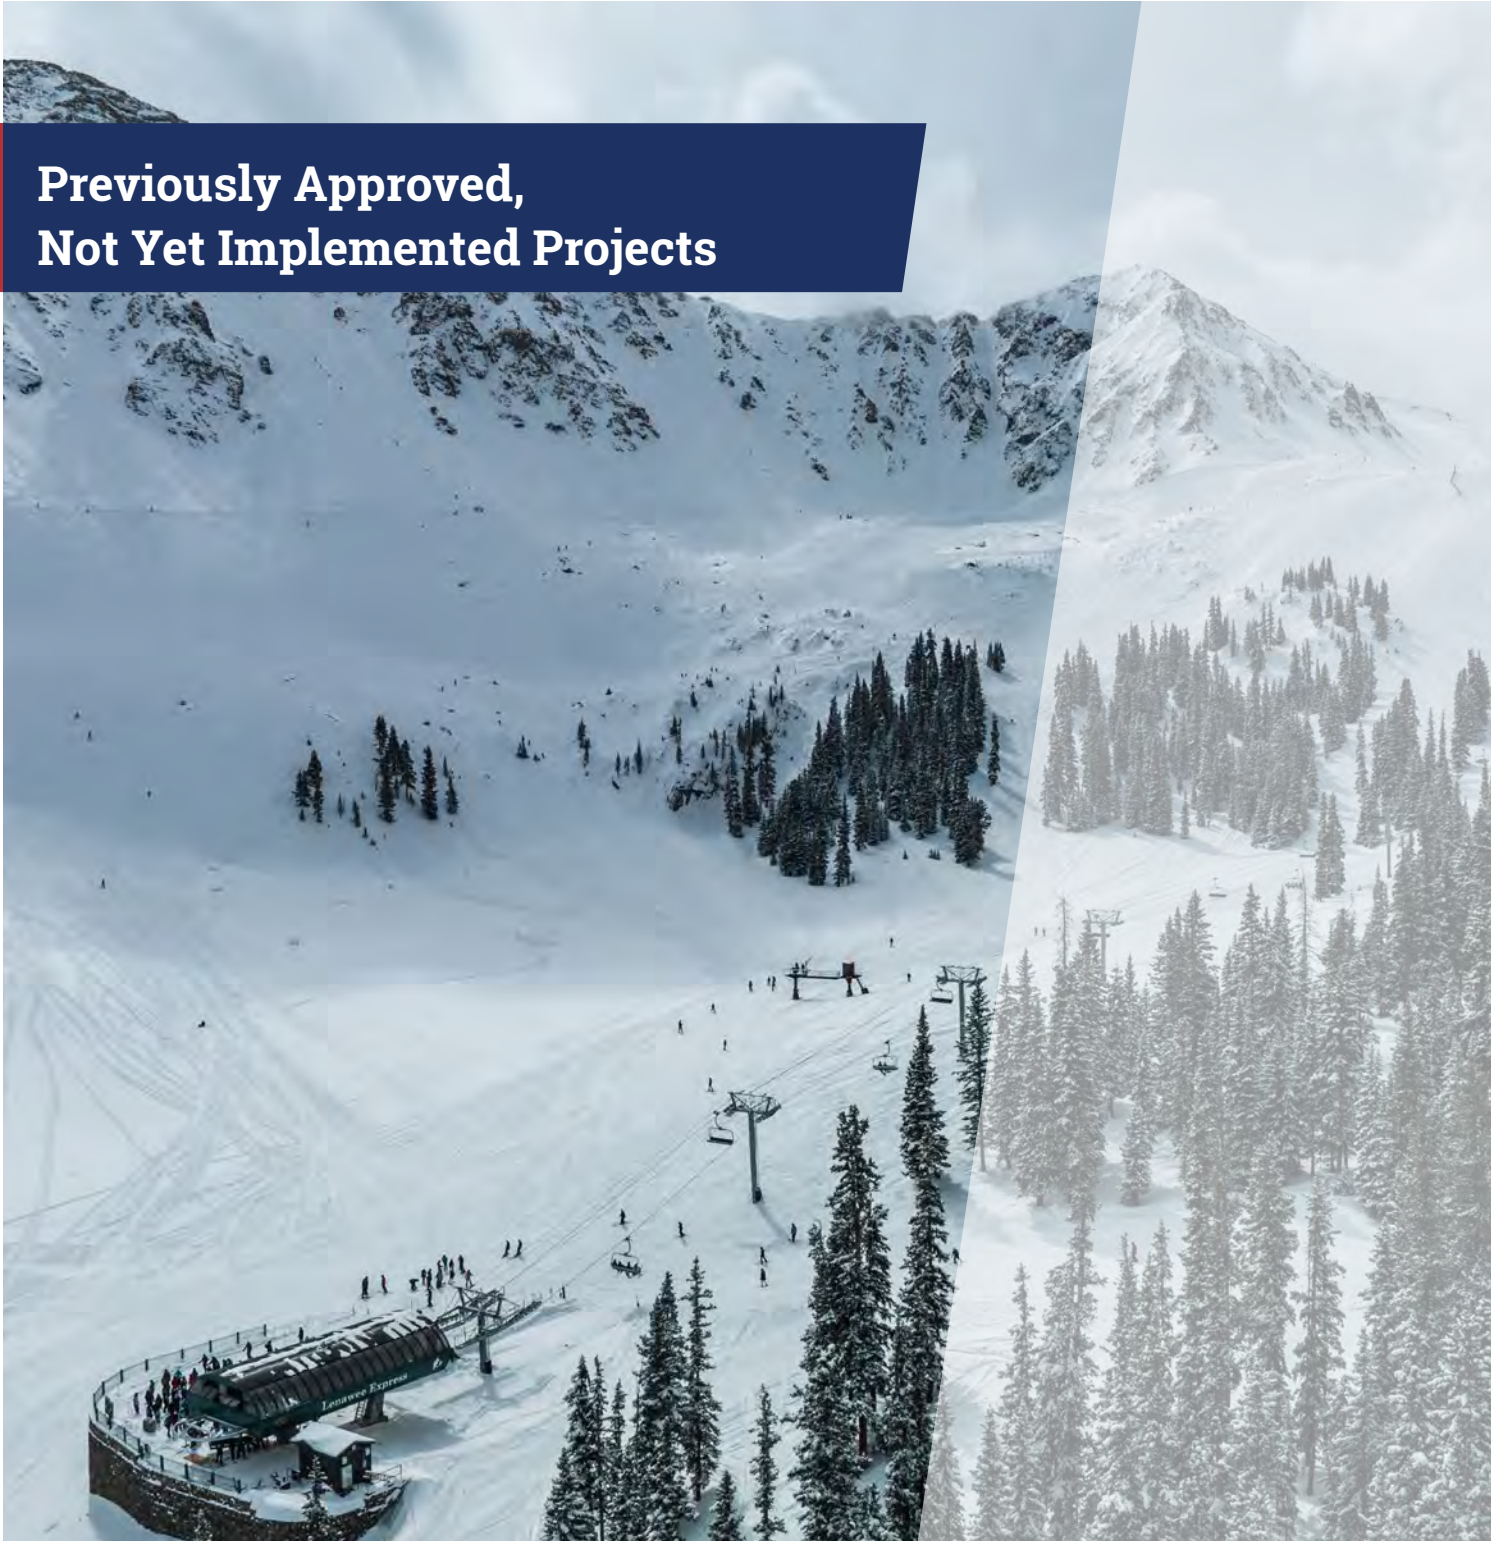

The following upgrades have been previously approved, but have not yet been implemented. They are planned for implementation in Chapter 5. Approvals are contained in the 2024 Arapahoe Basin Via Ferrata Phase II Decision Memo (2024 DM), 2021 Food Service and Lenawee Replacement Project Decision Memo (2021 DM), 2020 Arapahoe Basin High Noon Sand Shed Construction and Il Refugio Expansion Decision Memo (2020 DM), 2018 Arapahoe Basin Kitchen Remodel Letter to File, 1999 Arapahoe Basin Master Development Plan Environmental Impact Statement and Record of Decision (1999 ROD). Due to the length of time that has lapsed since some of these approvals, and because the WRNF's Land and Resource Management Plan was revised in 2002, additional site-specific NEPA (re)analysis may be required before A-Basin can implement them.

**Table 9. Previously Approved, Not Yet Implemented Projects**

| Previous NEPA                                                                                            | Approved Projects             |
|----------------------------------------------------------------------------------------------------------|-------------------------------|
| 2024 Arapahoe Basin Via Ferrate Phase II Decision Memo (2024 DM)                                         | East Gully Cliffs Via Ferrata |
| 2021 Food Service and Lenawee Replacement Project Decision Memo (2021 DM)                                | Midway BBQ                    |
| 2020 Arapahoe Basin High Noon Sand Shed Construction and Il Refugio Expansion Decision Memo (2020 DM)    | Storage shed                  |
| 2018 Arapahoe Basin Kitchen Remodel Letter to File                                                       | Food storage building         |
| 1999 Arapahoe Basin Master Development Plan Environmental Impact Statement Record of Decision (1999 ROD) | 50 acres of snowmaking        |

### A. FOOD SERVICE

In 2018, a new warehouse food storage building was approved as part of the A-frame kitchen expansion decision memo. While the kitchen has been expanded and the service road and utilities have been realigned, A-Basin has yet to construct the approximate 2,200-square-foot storage building which will be used for food storage.

The 2021 DM approved a new food service structure adjacent to the existing Black Mountain Lodge, referred to as the Midway BBQ. This new structure will be about 2,100 square feet and include food service, guest seating, and storage space.

### B. SNOWMAKING

The 1999 ROD approved 125 acres of snowmaking. Approximately 75 acres of the snowmaking has been currently constructed, leaving 50 acres to be constructed. Due to the length of time that has lapsed since the approval, new analysis is required.

### C. MOUNTAIN OPERATIONS

The 2020 DM approved the construction of a storage shed in the High Noon parking lot to be used for ice maintenance. By storing sand indoors A-Basin can keep sand dry, reduce maintenance on equipment, and reduce the amount of stored sand migration into the parking lot drainage system.

### D. SUMMER IMPROVEMENTS

The 2024 DM approved a second via ferrata within the existing SUP area. Located on the lower East Wall in the East Gully Cliffs area, this via ferrata is designed for entry-level visitors. This second phase includes sections approximately 300 feet long along the cliff bands and takes about three to four hours to complete. A 0.1-mile spur would be added to the existing Half Moon hiking trail to create access. Visitors would hike 0.4 miles from the top of the Black Mountain Express chairlift to access the new via ferrata.









The upgrade plan for A-Basin continues the tradition of “The Legend,” by building on previous planning and approvals. This section discusses the findings of the existing facilities analysis, with the assumption that the base facilities improvements from the Previously Approved, Not Yet Implemented projects, as previously discussed, will be implemented.

Unless stated otherwise, the planned conditions detailed in this section reflect a full build-out scenario, with all projects being completed.

### A. SUMMARY OF THE UPGRADE PLAN

The goal of the upgrade plan is to produce a high-quality experience throughout the recreational area. Accordingly, the upgrading plan is tailored to improve A-Basin’s ability to respond to its market/skier demands through the development of an enhanced learning area, improved efficiency of lift operations, better on-mountain connectivity, increased space in guest service facilities, and development of a multi-season recreational presence. This plan should not only improve the ski area’s current market niche, but also help to attract new visitors. A-Basin will continue to limit ticket and pass sales to preserve the guest experience at the appropriate level with the construction of upgrade plan projects. Overall, the implementation of the upgrade plan will ideally result in a well-rounded resort with a world-class learning experience, fewer crowds in the base area, an easier arrival experience, and the ability to open earlier in the season.

Upgrades to the lift network are intended to improve the arrival experience, create better access to beginner terrain, and enhance on-mountain circulation. There is a need for lift redundancy if Black Mountain Express cannot operate and an overarching need for more teaching/learning offerings. Due to A-Basin’s shortage of beginner slopes, the solution for these needs is an on-mountain learning center accessible from a gondola that will greatly enhance the lower ability level experience while providing lift redundancy for Black Mountain Express. While no significant terrain additions are planned, the learning area will take advantage of existing terrain that is currently underutilized. Extending snowmaking infrastructure to each lift pod will expand the amount of terrain that can open early season and accommodate growing early-season demand.

Guest service facility improvements are intended to address future needs in space and improve the quality of guest services. Through the creation of an on-mountain skier service facility, base area space can be reconfigured for other necessary uses, such as seating. In addition, the facility will connect more guests to the high alpine environment that makes Arapahoe Basin unique.

To support these upgrades, parking is planned to be expanded. Even with additional parking, A-Basin will continue their commitment to incentivizing carpooling and public transit. A pedestrian bridge over US Highway 6 and a pulse gondola will facilitate circulation around the lots and ideally reduce pedestrian and vehicle traffic.

Lastly, A-Basin recognizes that employee well-being will reflect in a high-quality guest experience. The installation of remote avalanche control devices will support staff safety during avalanche mitigation. With some functions at the base area moving to the on-mountain facility, employee locker and break areas can be improved at the base area.

### B. UPGRADED LIFT NETWORK

The majority of lifts at A-Basin are relatively new and are well-maintained. Upgrades to the lift network in this MDP are focused on improving on-mountain circulation, transporting skiers, and improving the beginner and novice skier experience. In addition to the lift upgrades outlined below, lifts that age out of their mechanical lifespan during the life of this plan may require replacement. The two candidates for this would be Zuma and Black Mountain Express.

#### **Park and Ride Gondola**

A pulse gondola is planned at the base area with the main purpose of transporting guests to and from the parking areas. One terminal would be near the entrance of Last Chance and Upper Last Chance and the other would be near the pedestrian tunnel under the highway. Guests could ride either direction. A-Basin currently runs a shuttle system to transport guests to the base area, however, the shuttle gets caught in the traffic around the parking area. The gondola would significantly reduce the dependency on the shuttle system, increasing efficiency and reducing congestion around the parking area. Because the gondola is only used for transporting guests, it would not impact the resort's lift network capability.

#### **Sawmill Flats Gondola**

Another gondola is planned to originate at the base area and ascend to the planned on-mountain skier services hub at Sawmill Flats described later in this chapter. A-Basin is constrained by limited base area space and the lack of beginner terrain. With this gondola, beginner guests will be able to ride the gondola to the enhanced learning area at Sawmill Flats and download if they are not yet comfortable skiing back to the base. In addition to transporting skiers to Sawmill Flats, it will provide some additional out-of-base capacity and lift redundancy. This is especially important during the morning staging period when Black Mountain Express experiences long wait times. In addition, if Black Mountain Express cannot operate, Pallavicini is not a suitable alternative means of accessing terrain for guests of lower ability levels. The Pika Place carpet is planned to be relocated near the Sawmill Flats facility to provide access to on-mountain beginner terrain.

#### **Wrangler Lift**

A detachable chairlift, Wrangler lift, is planned from Sawmill Flats to upper *Wrangler*. From there, skiers may access the Lenawee Express. Combined with the gondola, these two new lifts provide redundancy for Black Mountain Express and Pallavicini. The lift's primary purpose, however, is to be the chairlift guests ride after graduating from the carpet at Sawmill Flats. It will run slower than is typical to introduce new skiers to aerial lifts. Its shorter length will be less intimidating or tiring to newer skiers than Black Mountain Express, allowing novice skiers to repeat ski *Upper Wrangler* without returning to the base area. Alleviating the beginner terrain issues discussed in Chapter 3. It will also be separated from other ability levels, creating a more comfortable learning experience. The installation of the gondola and Wrangler lift will improve the learning experience and create an appropriate skill and terrain progression by facilitating access to the gentle terrain on the lower east side of the resort. Minimal tree removal is needed in this area to enhance the beginner terrain.

**Table 10. Lift Specifications—Upgrade Plan**

| Lift Name,<br>Lift Type     | Top<br>Elevation<br>(ft.) | Bottom<br>Elevation<br>(ft.) | Vertical<br>Rise<br>(ft.) | Slope<br>Length<br>(ft.) | Avg.<br>Grade<br>(%) | Design<br>Capacity<br>(pph) | Rope<br>Speed<br>(fpm) | Carrier<br>Spacing<br>(ft.) | Lift Maker/<br>Year Installed |
|-----------------------------|---------------------------|------------------------------|---------------------------|--------------------------|----------------------|-----------------------------|------------------------|-----------------------------|-------------------------------|
| Black Mtn Express/DC-4      | 11,551                    | 10,838                       | 713                       | 2,957                    | 25%                  | 2,000                       | 1,000                  | 120                         | LPOA/2010                     |
| Pallavicini/C-2             | 12,115                    | 10,790                       | 1,325                     | 3,510                    | 41%                  | 1,200                       | 500                    | 50                          | LPOA/2020                     |
| Beaver's Lift/C-4           | 12,458                    | 10,958                       | 1,500                     | 4,080                    | 39%                  | 1,800                       | 450                    | 67                          | LPOA/2018                     |
| Lenawee Express/DC-6        | 12,465                    | 11,450                       | 1,015                     | 4,079                    | 26%                  | 2,380                       | 1,000                  | 151                         | LPOA/2022                     |
| Molly Hogan/C-4             | 10,870                    | 10,812                       | 58                        | 398                      | 15%                  | 800                         | 250                    | 75                          | LPOA/2020                     |
| Molly's Magic/C             | 10,836                    | 10,808                       | 28                        | 152                      | 19%                  | 1,500                       | 160                    | 6                           | 2003                          |
| Zuma Lift/C-4               | 12,475                    | 11,362                       | 1,113                     | 4,164                    | 28%                  | 1,900                       | 450                    | 57                          | LPOA/2007                     |
| <b>Sawmill Flats/C</b>      | <b>11,287</b>             | <b>11,273</b>                | <b>14</b>                 | <b>120</b>               | <b>12%</b>           | <b>1,200</b>                | <b>160</b>             | <b>6</b>                    | <b>Relocated</b>              |
| Lazy J Tow/S                | 12,478                    | 12,462                       | 16                        | 375                      | 4%                   | 1,200                       | 325                    | 16                          | 2007                          |
| <b>Sawmill Flats/DG-8</b>   | <b>11,273</b>             | <b>10,848</b>                | <b>425</b>                | <b>1,915</b>             | <b>23%</b>           | <b>1,800</b>                | <b>800</b>             | <b>213</b>                  | <b>Planned</b>                |
| <b>Wrangler/DC-4</b>        | <b>11,515</b>             | <b>11,270</b>                | <b>245</b>                | <b>1,684</b>             | <b>15%</b>           | <b>1,800</b>                | <b>800</b>             | <b>107</b>                  | <b>Planned</b>                |
| <b>Park n Ride/FG-6x3x4</b> | <b>10,993</b>             | <b>10,883</b>                | <b>110</b>                | <b>973</b>               | <b>11%</b>           | <b>500</b>                  | <b>338</b>             | <b>973</b>                  | <b>Planned</b>                |

Source: SE Group

Notes:

C2 = fixed-grip double chairlift / C3 = fixed-grip triple chairlift / DC4 = detachable four-passenger chairlift / DG-8 = eight-passenger gondola / FG-6x3x4 = Fixed-grip gondola, 6 passenger cabins, 4 groups or 3 cabins per group / C = Carpet / S = Surface Lift



## C. UPGRADED TERRAIN NETWORK

Small, strategic changes are planned at A-Basin to improve on-mountain circulation and the beginner experience. An enhanced learning area from the top to the bottom of the planned Wrangler lift is planned to improve the experience for lower ability levels. On the east side of the resort below the East Wall, the terrain is gentler and more suitable for beginner-to-low intermediate skiers. Currently, *Wrangler* is the only novice route down from Black Mountain Express, has an average grade suitable for beginners, but has some steep portions new skiers may find discouraging. The planned Wrangler lift, the gondola, and the enhanced learning area will facilitate access to this area for less experienced skiers. The long, wide, and gentle ski run is ideal for beginners who have progressed beyond the carpet.

A skiway is planned to be improved in Zuma Bowl near *Miner's Glade* because another groomable ski route is needed in the area to increase utilization of the western side of Montezuma and to help with on-mountain winter operations in Montezuma Bowl. It will be wide enough to accommodate a snowcat and will not significantly increase skiable acreage.

### 1. TERRAIN DISTRIBUTION BY ABILITY LEVEL

Under the upgrade plan, the terrain distribution by ability level remains the same. However, access to existing lower ability level terrain will be improved. While the portion of *Wrangler* that will be served by the new Wrangler lift is technically novice because of a slightly steeper pitch near the top, it will be acceptable for more advanced beginners. This nuance would effectively increase the percentage of beginner terrain to a level that is much closer to the market demand.


**Table 11. Terrain Distribution by Ability Level—Upgrade Plan**

| Skier/Rider Ability Level | Trail Area (acres) | Skier/Rider On-Trail (guests) | Skier/Rider Distribution (%) | Skier/Rider Market (%) | A-Basin Market (%) |
|---------------------------|--------------------|-------------------------------|------------------------------|------------------------|--------------------|
| Beginner                  | 0.8                | 26                            | 1%                           | 5%                     | 2%                 |
| Novice                    | 37.8               | 681                           | 13%                          | 15%                    | 7%                 |
| Low Intermediate          | 37.3               | 522                           | 10%                          | 25%                    | 18%                |
| Intermediate              | 129.8              | 1298                          | 25%                          | 35%                    | 20%                |
| Advanced                  | 299.0              | 1495                          | 29%                          | 15%                    | 30%                |
| Expert                    | 366.1              | 1098                          | 21%                          | 5%                     | 23%                |
| <b>TOTAL</b>              | <b>870.8</b>       | <b>5,121</b>                  | <b>100%</b>                  | <b>100%</b>            | <b>100%</b>        |

Source: SE Group



Chart 3. Terrain Distribution by Ability Level—Upgrade Plan

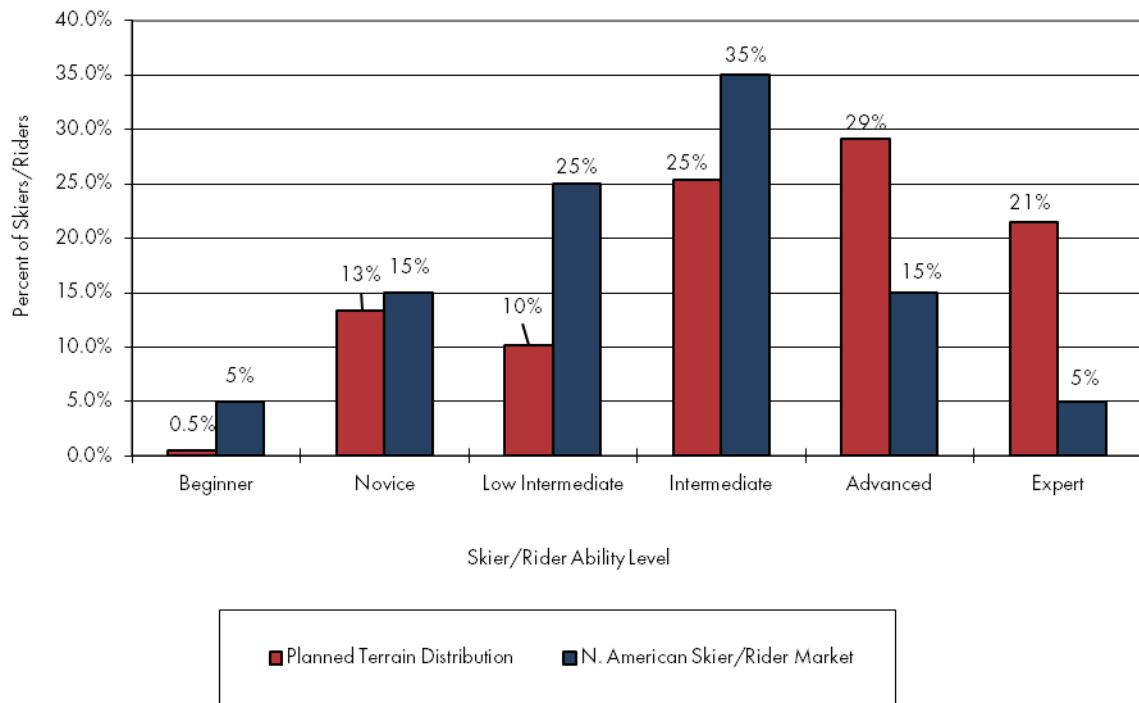

## D. UPGRADED DESIGN DAY ANALYSIS

### 1. LIFT NETWORK CAPABILITY

A detailed evaluation of A-Basin's upgraded lift network was completed for this MDP, as shown in the table below. In the upgrade plan, A-Basin's design day is calculated at 4,840 guests—an increase of 720 from its existing 4,120 guests. Most of this increase comes from the planned Wrangler lift, the primary purpose of which is to improve the experience of the lower ability level skier at A-Basin. The Park n' Ride Gondola does not contribute capability to the overall lift network capabilities because it will solely be used for transporting guests from one place to another. Even with an increase in lift network capability, A-Basin plans to continue limiting ticket sales to preserve the guest experience.

Table 12. Lift Network Capability—Upgrade Plan

| Lift Name,<br>Lift Type    | Slope<br>Length<br>(ft.) | Vertical<br>Rise<br>(ft.) | Design<br>Capacity<br>(pph) | Operating<br>Hours<br>(hrs.) | Up-<br>Mountain<br>Access<br>Role<br>(%) | Misloading/<br>Lift<br>Stoppages<br>(%) | Adjusted<br>Hourly<br>(pph) | VTF/<br>Day<br>(000) | Vertical<br>Demand<br>(ft./day) | Lift Network<br>Capability<br>(guests) |
|----------------------------|--------------------------|---------------------------|-----------------------------|------------------------------|------------------------------------------|-----------------------------------------|-----------------------------|----------------------|---------------------------------|----------------------------------------|
| Black Mtn<br>Express/ DC-4 | 2,957                    | 713                       | 2,000                       | 7.50                         | 10                                       | 5                                       | 1,700                       | 9,097                | 11,214                          | 810                                    |
| Pallavicini/C-2            | 3,510                    | 1,325                     | 1,200                       | 7.00                         | 5                                        | 5                                       | 1,080                       | 10,017               | 18,979                          | 530                                    |
| Beaver's Lift/ C-4         | 4,080                    | 1,500                     | 1,800                       | 6.50                         | 0                                        | 5                                       | 1,710                       | 16,673               | 21,484                          | 780                                    |
| Lenawee<br>Express/DC-6    | 4,079                    | 1,015                     | 2,380                       | 6.50                         | 10                                       | 10                                      | 1,904                       | 12,567               | 15,009                          | 840                                    |
| Molly Hogan/ C-4           | 398                      | 58                        | 800                         | 6.50                         | 0                                        | 10                                      | 720                         | 271                  | 1,724                           | 160                                    |
| Molly's Magic/ C           | 152                      | 28                        | 1,500                       | 6.50                         | 0                                        | 15                                      | 1,275                       | 233                  | 2,658                           | 90                                     |
| Zuma Lift/C-4              | 4,164                    | 1,113                     | 1,900                       | 6.50                         | 0                                        | 5                                       | 1,805                       | 13,061               | 15,583                          | 840                                    |
| Sawmill Flats/C            | 120                      | 14                        | 1,200                       | 6.50                         | 0                                        | 15                                      | 1,020                       | 93                   | 1,655                           | 60                                     |
| Lazy J Tow/S               | 375                      | 16                        | 1,200                       | 6.50                         | 100                                      | 0                                       | -                           | 0                    | 1,602                           | -                                      |
| Sawmill Flats/<br>DG8      | 1,915                    | 425                       | 1,800                       | 6.50                         | 50                                       | 10                                      | 720                         | 1,989                | 11,022                          | 180                                    |
| Wrangler/DC4               | 1,684                    | 245                       | 1,800                       | 6.50                         | 5                                        | 10                                      | 1,530                       | 2,437                | 4,428                           | 550                                    |
| Park n Ride/FG-<br>6x3x4   | 973                      | 110                       | 500                         | 7.00                         | 100                                      | 0                                       | -                           | 0                    | 0                               | -                                      |
| <b>TOTAL</b>               | <b>24,407</b>            |                           | <b>18,080</b>               |                              |                                          |                                         | <b>13,464</b>               | <b>66,438</b>        |                                 | <b>4,840</b>                           |

Source: SE Group

Notes:

C2 = fixed-grip double chairlift / C3 = fixed-grip triple chairlift / DC4 = detachable four-passenger chairlift / DG-8 = eight-passenger gondola / FG-6x3x4 = Fixed-grip gondola, 6 passenger gondola, 4 groups of 3 cabins per group / C = Carpet / S = Surface Lift

### 2. DENSITY ANALYSIS

As shown in the following table, A-Basin's average density index in the upgrade plan is 54%—a slight improvement in utilization relative to A-Basin's current density of 52%. Since this upgrade density index is still below 100%, guests at A-Basin will continue to enjoy a high-quality recreation experience. However, strategic lift additions and upgrades will increase the use of currently-underutilized terrain—particularly lower ability level terrain on the east side.

As discussed in Chapter 3, overall resort efficiency is becoming an increasingly important factor in the industry, relating not only to operational efficiency, but also efficiency of the design and layout of the resort. A balanced resort would ideally have a trail network served by the fewest lifts possible, while maintaining circulation routes and service to all ability levels and types of skiers.

#### a) Lift Network Efficiency

Lift Network Efficiency is the amount of effort and cost required to operate and maintain the lift network. As noted in Chapter 3, optimally, and as a planning goal, the average capability per lift would likely be close to 1,000. Industry-wide, the average capability per lift is approximately 650. For the upgrade plan, the average per lift is 586, down slightly from existing conditions. This is primarily driven by the new Sawmill Flat gondola that has a 50% up-mountain access role. The slight decrease in lift network efficiency is outweighed by the benefit of providing a higher quality beginner area and a more meaningful learning progression at A-Basin in the planned Sawmill Flats area.

#### b) Terrain Network Efficiency

Terrain Network Efficiency refers to the amount of effort required to properly maintain a resort's terrain. From this standpoint, the most efficient scenario is to have a quantity of terrain that closely meets the target density requirements. Terrain Network Efficiency increases under the upgrade plan. The overall density index increases from 49% to 59%, and overall trail density increases from four skiers per acre to six skiers per acre. This implies that the lift network better serves the terrain network, and the terrain is better utilized with improvements from the upgrade plan.

**Table 13. Density Analysis – Upgrade Plan**

| Lift Name             | Lift Network Capability | Guest Dispersement            |                   |                  |                     | Terrain Area (acres) | Density Analysis             |                              |             | Index (%)  |
|-----------------------|-------------------------|-------------------------------|-------------------|------------------|---------------------|----------------------|------------------------------|------------------------------|-------------|------------|
|                       |                         | Support Fac./Milling (guests) | In Lines (guests) | On Lift (guests) | On Terrain (guests) |                      | Terrain Density (guests/ac.) | Desired Density (guests/ac.) | Diff. (+/-) |            |
| Black Mtn Express/DC4 | 810                     | 203                           | 227               | 84               | 296                 | 57.6                 | 5                            | 10                           | -5          | 50%        |
| Pallavicini/C2        | 530                     | 133                           | 162               | 126              | 109                 | 147.2                | 1                            | 3                            | -2          | 33%        |
| Beaver's Lift/C4      | 780                     | 195                           | 114               | 233              | 238                 | 121.9                | 2                            | 5                            | -3          | 40%        |
| Lenawee Express/DC6   | 840                     | 210                           | 159               | 129              | 342                 | 171.6                | 2                            | 7                            | -5          | 29%        |
| Molly Hogan/C4        | 160                     | 48                            | 60                | 19               | 33                  | 3.5                  | 9                            | 17                           | -8          | 53%        |
| Molly's Magic/C       | 90                      | 30                            | 21                | 20               | 19                  | 0.5                  | 37                           | 35                           | 2           | 106%       |
| Zuma Lift/C4          | 840                     | 210                           | 60                | 278              | 292                 | 338.3                | 1                            | 5                            | -4          | 20%        |
| Sawmill Flats/C       | 60                      | 20                            | 17                | 13               | 10                  | 0.2                  | 42                           | 35                           | 7           | 120%       |
| Sawmill Flats/DG8     | 180                     | 54                            | 24                | 29               | 73                  | 8.5                  | 9                            | 17                           | -8          | 53%        |
| Wrangler/DC4          | 550                     | 165                           | 128               | 54               | 203                 | 21.0                 | 10                           | 14                           | -4          | 71%        |
| <b>TOTAL</b>          | <b>4,840</b>            | <b>1,268</b>                  | <b>972</b>        | <b>752</b>       | <b>1,377</b>        | <b>870.2</b>         | <b>5</b>                     | <b>9</b>                     | <b>-4</b>   | <b>54%</b> |

Source: SE Group

Notes:

Lift Types: DC-6 = detachable six-passenger chairlift / DC-4 = detachable four-passenger chairlift / C-4 = fixed-grip quad chairlift / C-2 = fixed-grip double chairlift / C = carpet / S = surface lift

The Lazy J Tow and Park and Ride Gondola were not included in the density analysis because they are transport lifts and do not contribute to the overall lift network capability.

### **E. UPGRADED GUEST SERVICES FACILITIES, FOOD SERVICE SEATING & SPACE USE ANALYSIS**

#### **1. GUEST SERVICES**

A new skier services hub is planned at Sawmill Flats. The new building is intended to address existing deficiencies in space and provide a higher quality guest experience. The new building will be home to a learning center, additional food and beverage service and seating, some office space, and other functions such as restrooms. Rentals for the ski school can be located here, streamlining the process for ski school guests at Sawmill Flats and traditional guests at the base. The building is planned as an approximately 10,000 square feet footprint with multiple stories.

One major benefit of an on-mountain enhanced learning center is that it allows lower ability level guests to experience the mountain beyond the base area. Guests can experience a deeper connection with the outdoors when moved away from more developed areas. From the new facility, skiers can enjoy scenic views of the East Wall while they are learning. By moving the resort's beginners to a different part of the mountain, it will alleviate some congestion at the base area as well. There is potential to convert the learning center building at the base area to restaurant seating. There is potential to move some employee space, such as lockers and ski patrol space, to the new skier services hub. Once other functions are removed from the base area, A-Basin can alleviate existing deficiencies with extra space. For example, the ski school building could become additional seating or rental space.

#### **2. SPACE USE ANALYSIS**

Space use recommendations based upon an increased design day of 4,840 are detailed in Table 14. Overall, approximately 15,000 square feet to 30,000 square feet of additional space is needed. The bulk of this space will be located at the new Sawmill Flats building. It should be noted that certain buildings, Black Mountain Lodge for example, have smaller recommended ranges under the upgrade plan. This is due to the Sawmill Flats guest services building absorbing excess demand from those buildings, reducing pressure on facilities.



**Table 14. Space Use Recommendations—Total Resort—Upgrade Plan**

| Service Function            | Recommended Range |               |
|-----------------------------|-------------------|---------------|
|                             | Low               | High          |
| Ticket Sales/Guest Services | 1,090             | 1,330         |
| Public Lockers              | 3,270             | 3,990         |
| Rentals/Repair              | 6,530             | 7,990         |
| Retail Sales                | 2,220             | 2,720         |
| Bar/lounge                  | 3,330             | 4,070         |
| Adult Ski School            | 1,740             | 2,130         |
| Kid's Ski School            | 3,490             | 4,260         |
| Restaurant Seating          | 17,170            | 19,993        |
| Kitchen/Scramble            | 8,585             | 9,997         |
| Rest rooms                  | 2,890             | 3,530         |
| Ski Patrol                  | 1,780             | 2,180         |
| Administration              | 4,570             | 5,590         |
| Employee Lockers/Lounge     | 1,830             | 2,240         |
| Mechanical                  | 1,580             | 2,310         |
| Storage                     | 2,640             | 3,860         |
| Circulation/Waste           | 6,320             | 9,240         |
| <b>TOTAL SQUARE FEET</b>    | <b>69,035</b>     | <b>85,430</b> |

*Source:* SE Group

### 3. FOOD SERVICE SEATING

Under the upgrade plan, the seating deficiency will be exacerbated. However, the construction of the Sawmill Flats facility will drastically relieve pressure on the Black Mountain Lodge. Previously, the Black Mountain Lodge was short 140 seats. While there will still be a need for seating at the base area, Sawmill Flats will absorb ski school guests that currently exist at the base area. As previously discussed, the base area shortage can be alleviated by reconfiguring space to create new seating. Approximately 330 seats will be required at the new Sawmill Flats facility, a third of which would be dedicated to students of the ski school in all-day programs. Il Rifugio and Steilhang Hut remain fairly balanced.

Overall, the resort will require approximately 600 additional seats upon full buildout of the upgrade plan. By moving the ski school from the base area, that space can be converted into seating space. Additionally, abundant outdoor seating offsets some of this need when weather allows. As previously mentioned, A-Basin's clientele are more likely to bring a brown-bag option than those of more traditional resorts. These factors combined with space reconfiguration and new food and beverage facilities at Sawmill Flats will balance seating to the resort's design day.

Table 15. Restaurant Seats—Upgrade Plans

|                        | Base Area | Black Mountain Lodge | Steilhang Hut | Il Rifugio | Sawmill Flats | Resort Total |
|------------------------|-----------|----------------------|---------------|------------|---------------|--------------|
| Lunchtime Demand       | 2,519     | 904                  | 197           | 172        | 1,145         | 4,937        |
| Average Seat Turnover  | 3.5       | 3.5                  | 4             | 3          | 3.5           |              |
| Existing Indoor Seats  | 474       | 240                  | 48            | 48         |               | 810          |
| Recommended Seats      | 720       | 258                  | 49            | 57         | 327           | 1,412        |
| Difference             | -246      | -18                  | -1            | -9         | -327          | -602         |
| Existing Outdoor Seats | 130       | 200                  | 48            | 48         |               | 426          |

## F. UPGRADED PARKING AND RESORT ACCESS

Total available parking should be balanced with the resort's design day for a peak visitation day. Guests arrive at A-Basin by personal vehicles, the Summit Stage, Front Range SnowStang, or charter buses. As mentioned in Chapter 3, parking is limited at A-Basin. Efforts to encourage public transit ridership and higher AVO have helped in recent years. A-Basin has diligently been working to encourage higher AVO with carpooling incentives. The resort's partnership with CDOT and engagement with the Summit Transit Board have resulted in the growth of Snowstang ridership, taking cars off the road. They hope to expand the program and have recently been able to utilize 75 parking spaces for employees, approximately 1.5 miles away. Prior to NEPA analysis, specific planning will be completed, including wetland and other resource mapping.

To further provide seamless connectivity from the parking areas to the base and onto the mountain, A-Basin has envisioned multiple improvements. The administration and drop-off lot is planned to be reconfigured to make better use of the space and to provide improved circulation in this critical drop-off area for guest arrival and public transit. This may include adding additional electric vehicle chargers or adding an acceleration lane to the highway. Two new parking areas have been planned at Moose Hollow and an extension of Upper Last Chance. The Moose Hollow parking area is planned to have approximately 200 spaces. It is planned to have ski-in, ski-out access and to have a pedestrian bridge to provide access across the highway. The pedestrian bridge will follow all CDOT regulations for underpass clearance. The parking area off of Upper Last Chance is planned to have approximately 195 spaces. A bridge or natural bottom culvert is envisioned to span the creek between the two parking areas. Skiers and riders could also ski to the underpass, similar to what skiers currently do when parking in the Last Chance lot.

As previously mentioned, the new pulse gondola at the base area will transport guests to and from Last Chance and Upper Last Chance parking lots. This will remove some parking spaces from the lots, but not a significant amount. It will ideally reduce traffic between the lots and reduce the dependency on shuttling guests from the lots to the base area.

Parking is outlined in Table 16. With an increased design day of 4,840 and an additional 2% of non-skiing guests, parking is necessary for approximately 4,937 guests. Assuming the same AVO and bus ridership as existing, there is a slight surplus in parking. The surplus is desired to accommodate the increase in projected visitation, prevent guests from parking on the highway, and eliminate the need for a shuttle for guests from further parking areas. If the AVO dips below 2.5, this surplus will decrease.

Before the planned lots are built, A-Basin plans to continue to implement measures to incentivize carpooling and that program will evolve as needed to continue to address guest and parking demands. To increase public transit ridership, A-Basin will improve its public transit drop-off and pick-up area and continue collaborating with local municipalities. As previously mentioned, A-Basin will still manage the level of ticket and pass sales to ensure that parking lots and other functions are not overwhelmed by high levels of visitation.

**Table 16. Recommended Parking—Upgrade Plan**

|                                      | Total |
|--------------------------------------|-------|
| Parking Demand                       | 4,937 |
| # of guests arriving by car (95%)    | 4,690 |
| # of guest arriving by bus (5%)      | 247   |
| Required car parking spaces          | 1,876 |
| Required employee car parking spaces | 122   |
| Total required spaces                | 1,998 |
| Existing parking spaces              | 1,674 |
| Planned parking spaces               | 2,069 |
| Surplus/deficit                      | 71    |

## G. UPGRADED RESORT OPERATIONS

### 1. SNOWMAKING

A-Basin plans to make snow on 65 acres, bringing its total snowmaking coverage to 140 acres. The additional coverage will allow for more consistent snow surface throughout the year and ensure consistent opening and closing dates during years of low or later snowfall.

Approximately 25 acres of snowmaking in Montezuma Bowl are planned to allow the lift can remain open during times of low snow early or late in the season. As previously mentioned, the Montezuma Bowl lift supports approximately 830 guests. If this lift shuts down, the A-Basin lift network would be constrained. The area is primarily south and west facing, exposed to afternoon sun and wind, so snowmaking would help provide reliable coverage. Coverage is planned down portions of *Shining Light* and *Columbine* to ensure there is a route down from Zuma.

On *Loafer* and *Davis* runs in the Beavers, 21 acres of snowmaking are planned on intermediate routes. Beavers primarily consists of advanced terrain and glades, so intermediate guests would not be able to ski this area if *Loafer* and *Davis* were closed.

Enhanced snow coverage is planned for the frontside trails accessed from Lenawee Express. On the frontside, there is planned coverage on *Humbug*, *West Gully*, and near the bottom of *Upper Wrangler* and *Shooting Gallery*, ensuring an additional route is available off of Lenawee Express. Some additional coverage is planned on *Grizzly Road*, near *West Wall*, and on the ridge between the Frontside and the Beavers to facilitate skier circulation. To support the development of the Sawmill Flats area and the new Wrangler lift, snowmaking is planned under the lift line of the Wrangler lift, on *Middle Wrangler*, *Chisholm Trail*, and *North Fork*. Combined, this totals 19 acres on the frontside.

A-Basin's water rights authorize the resort to divert water for snowmaking from the North Fork of the Snake River from September 1 to December 31. Water is diverted into a 5.5 acre-feet reservoir where it is

stored until ready to be used. The 1999 ROD limits A-Basin's diversions to 25% of the streamflow in the North Fork of the Snake River. In addition to the 25% cap on water withdrawal, the resort always maintains a minimum bypass flow of 0.5 cfs at the diversion except for October, when a 1.0 cfs minimum bypass flow is required to mitigate impacts to fish spawning. The minimum bypass flow naturally dips below the requirement mid-December to early January, at which point A-Basin stops diverting. Otherwise, A-Basin's diversions do not cause the stream to drop below the minimum bypass flow.

The withdrawal conditions restrain A-Basin's use of its water rights. A-Basin will propose a modification to the withdrawal conditions to allow expanded snowmaking coverage from A-Basin's water rights while protecting the environment and natural resources.

A-Basin's two decades of monitoring data have established a baseline condition and demonstrates that A-Basin's snowmaking diversions have shown no impacts to environmental conditions to-date. The 1999 ROD mandated a five-year monitoring plan to measure impacts to fish and insect populations, streamflow levels, stream chemistry, and stream morphology. Snowmaking was found to have no impact on these factors and no changes were suggested. A-Basin has continued to monitor fish populations.

## 2. AVALANCHE MITIGATION

In keeping with industry trends, A-Basin plans to install remote systems along the East Wall and west side of Montezuma Bowl to facilitate avalanche control operations in this steep and technical terrain. A-Basin currently uses avalaunchers, but the technology is being phased out in favor of remote avalanche controllers.

## 3. SUP BOUNDARY ADJUSTMENT

A-Basin plans to adjust the SUP area by five acres to accommodate the planned parking area (refer to Figure 11). In exchange, the existing SUP boundary would be adjusted in Lower Montezuma Bowl by five acres to result in a net zero gain of area for A-Basin's SUP. The adjusted SUP area is part of Management Area 4.32, which is managed for "recreational opportunities and scenic qualities in locations that attract high numbers of users" and may require an amendment to be incorporated into Management Area 8.25. Refer to Chapter 2.G.3 for further details on these management areas.<sup>22</sup>

## 4. MAINTENANCE FACILITIES

A new maintenance facility is planned near the existing maintenance facility to expand shop and storage space. The new building will be approximately 4,000 square feet to accommodate additional vehicle maintenance bays.

## 5. INFRASTRUCTURE AND UTILITIES

Water, sewer, and electric is planned to be connected to the new facility at Sawmill Flats. It will be connected to nearby existing power and sewer lines. The resort plans to drill another well to ensure sufficient water supply. In addition, A-Basin plans to install fiber internet over the entire mountain.

---

<sup>22</sup> USDA Forest Service. 2002. White River National Forest Land and Resource Management Plan 2002 revision. White River National Forest, Glenwood Springs, CO.


## 6. MOUNTAIN ROADS

Road improvements might be needed to construct the Sawmill Flats skier services facility; however, no new on mountain roads are planned.

## H. RESORT BALANCE

The purpose of the upgrade plan projects is to elevate the experience for guests of all ability levels and fix operational inefficiencies. The new lifts increase the lift network capability, but the increase is concentrated on the lower east side of the mountain. Beginner-to-intermediate skiers will have better access to the gentler terrain on the lower east portion of the mountain. The new learning facility at Sawmill Flats will bring guest service space into balance with the rest of the resort, allowing space to be reconfigured at the base area and establishing an on-mountain skier services hub for both guests and employees. The construction of new parking lots will accommodate the increased design day levels but parking will continue to be a limiting factor if AVO drops. Restaurant seating will be addressed with reconfigurations in the base area and the Sawmill Flats facility, as well as existing outdoor decks.

**Chart 4. Resort Balance—Upgrade Plan**

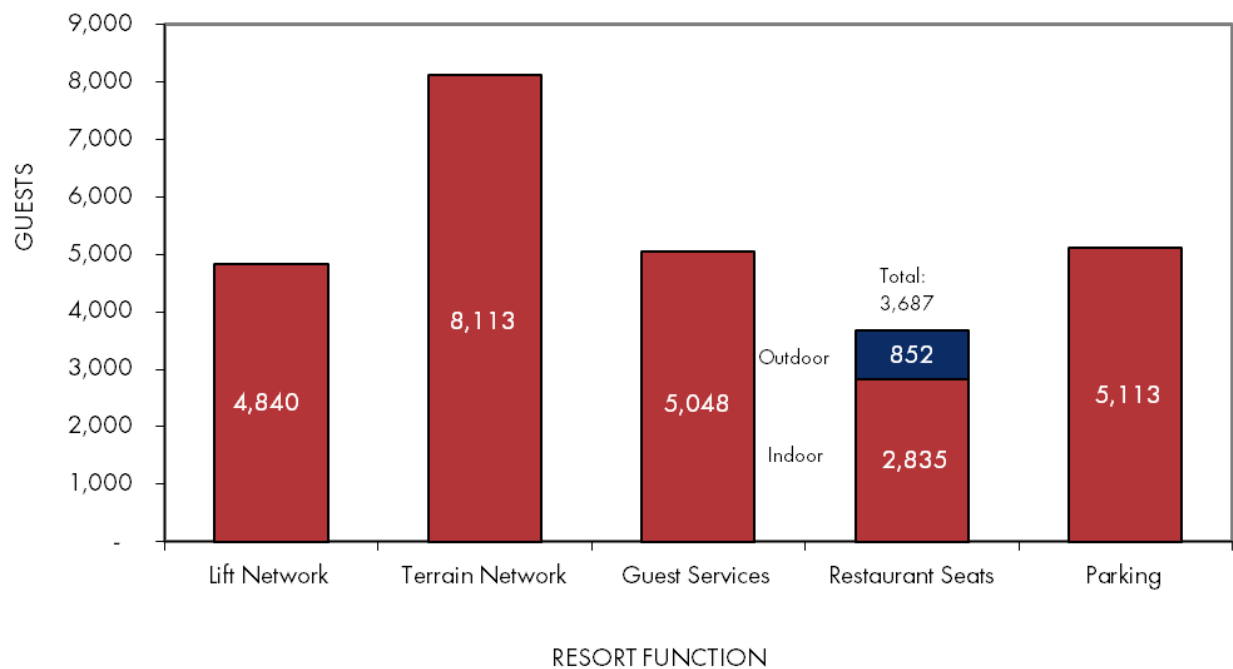



## I. UPGRADED SUMMER AND MULTI-SEASON OPERATIONS

Summer operations are growing more popular at ski areas as demand for year round outdoor recreation grows. Colorado is already a hub for outdoor activities, including hiking, biking, and camping. Summer activities at ski areas generally attract a more diverse set of guests than winter sports due to lower cost barriers or entry-level ability. Many people go to ski areas to access the National Forest in a more managed setting. A-Basin intends to become more of a summer activity hub in response to increase summer access to the surrounding area. The following projects will further activate A-Basin as a summer destination.

To enhance existing summer operations, Arapahoe Basin is planning various summer improvements. The resort is planning to add to its summer trail offerings, including ten miles of new trail in the Beavers, Steep Gullies, and the frontside. The trails were designed by the International Mountain Bicycling Association and will have features such as banks, rocks, berms, and speed control. A-Basin does not plan on offering lift-served mountain biking at this time. Certain trails will be designated as uphill, downhill, or both to prevent congestion on popular trails.

A small connector trail is planned to link the Via Ferrata and Half Moon trails to hikers to improve circulation between trails.

A new outdoor classroom for educational events and as a place to gather is planned near the bottom terminal of Lenawee Express. It will be accessed from the base and the top of Black Mountain Express by hiking trails.

A-Basin plans to offer camping in Last Chance parking lot or the planned Moose Hollow parking lot supervised by a camp host. Depending on demand, camping areas may occupy the entire parking lot. Established campsites may include picnic tables, RV hookups, and vault toilets. Trash and maintenance would be managed by the resort.

A-Basin plans to build four 150 square-foot cabins with outdoor decks available for rent during summer and winter. These would be a day-use only basecamp for skiers or hikers and enrich the on-mountain experience for patrons. The cabins would have electricity for heat and lights, but no other utilities. Architecture would be consistent with other on-mountain buildings.

Summer zones will stay largely the same with the exception of the Sawmill Flats area. That area, previously designated as Zone 2 within 2A, will be designated as Zone 1 within a new area, 1C. The area will only include the area surrounding the top terminal of the gondola, the bottom terminal of the Wrangler lift, and the Sawmill Flats building. Summer zones under the upgrade plan are detailed in Table 17. Refer to Appendix B for definitions of each zone.

Table 17. Summer Use Zones

| Area Boundaries    | Score     | Appropriate Zone |
|--------------------|-----------|------------------|
| <b>Area 1A</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>4</b>  | <b>Zone 1</b>    |
| <b>Area 1B</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>4</b>  | <b>Zone 1</b>    |
| <b>Area 2A</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 2         |                  |
| <b>Total Score</b> | <b>5</b>  | <b>Zone 2</b>    |
| <b>Area 2B</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>6</b>  | <b>Zone 2</b>    |
| <b>Area 2C</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>6</b>  | <b>Zone 2</b>    |
| <b>Area 3A</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>8</b>  | <b>Zone 3</b>    |
| <b>Area 3B</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 2         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 2         |                  |
| <b>Total Score</b> | <b>8</b>  | <b>Zone 3</b>    |
| <b>Area 1C</b>     |           |                  |
| Access             | 1         |                  |
| Remoteness         | 1         |                  |
| Naturalness        | 1         |                  |
| Infrastructure     | 1         |                  |
| <b>Total Score</b> | <b>4</b>  | <b>Zone 1</b>    |
| <b>Area 3C</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 2         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>9</b>  | <b>Zone 3</b>    |
| <b>Area 4A</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 2         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>11</b> | <b>Zone 4</b>    |
| <b>Area 4B</b>     |           |                  |
| Access             | 2         |                  |
| Remoteness         | 2         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>10</b> | <b>Zone 4</b>    |
| <b>Area 4C</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 2         |                  |
| <b>Total Score</b> | <b>11</b> | <b>Zone 4</b>    |
| <b>Area 5A</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>12</b> | <b>Zone 5</b>    |
| <b>Area 5B</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>12</b> | <b>Zone 5</b>    |
| <b>Area 5C</b>     |           |                  |
| Access             | 3         |                  |
| Remoteness         | 3         |                  |
| Naturalness        | 3         |                  |
| Infrastructure     | 3         |                  |
| <b>Total Score</b> | <b>12</b> | <b>Zone 5</b>    |

## Figures







ARAPAHOE BASIN  
COLORADO

2025 MDP

Figure 1: Vicinity Map

Legend




Ski Areas



Major Roads



Rivers

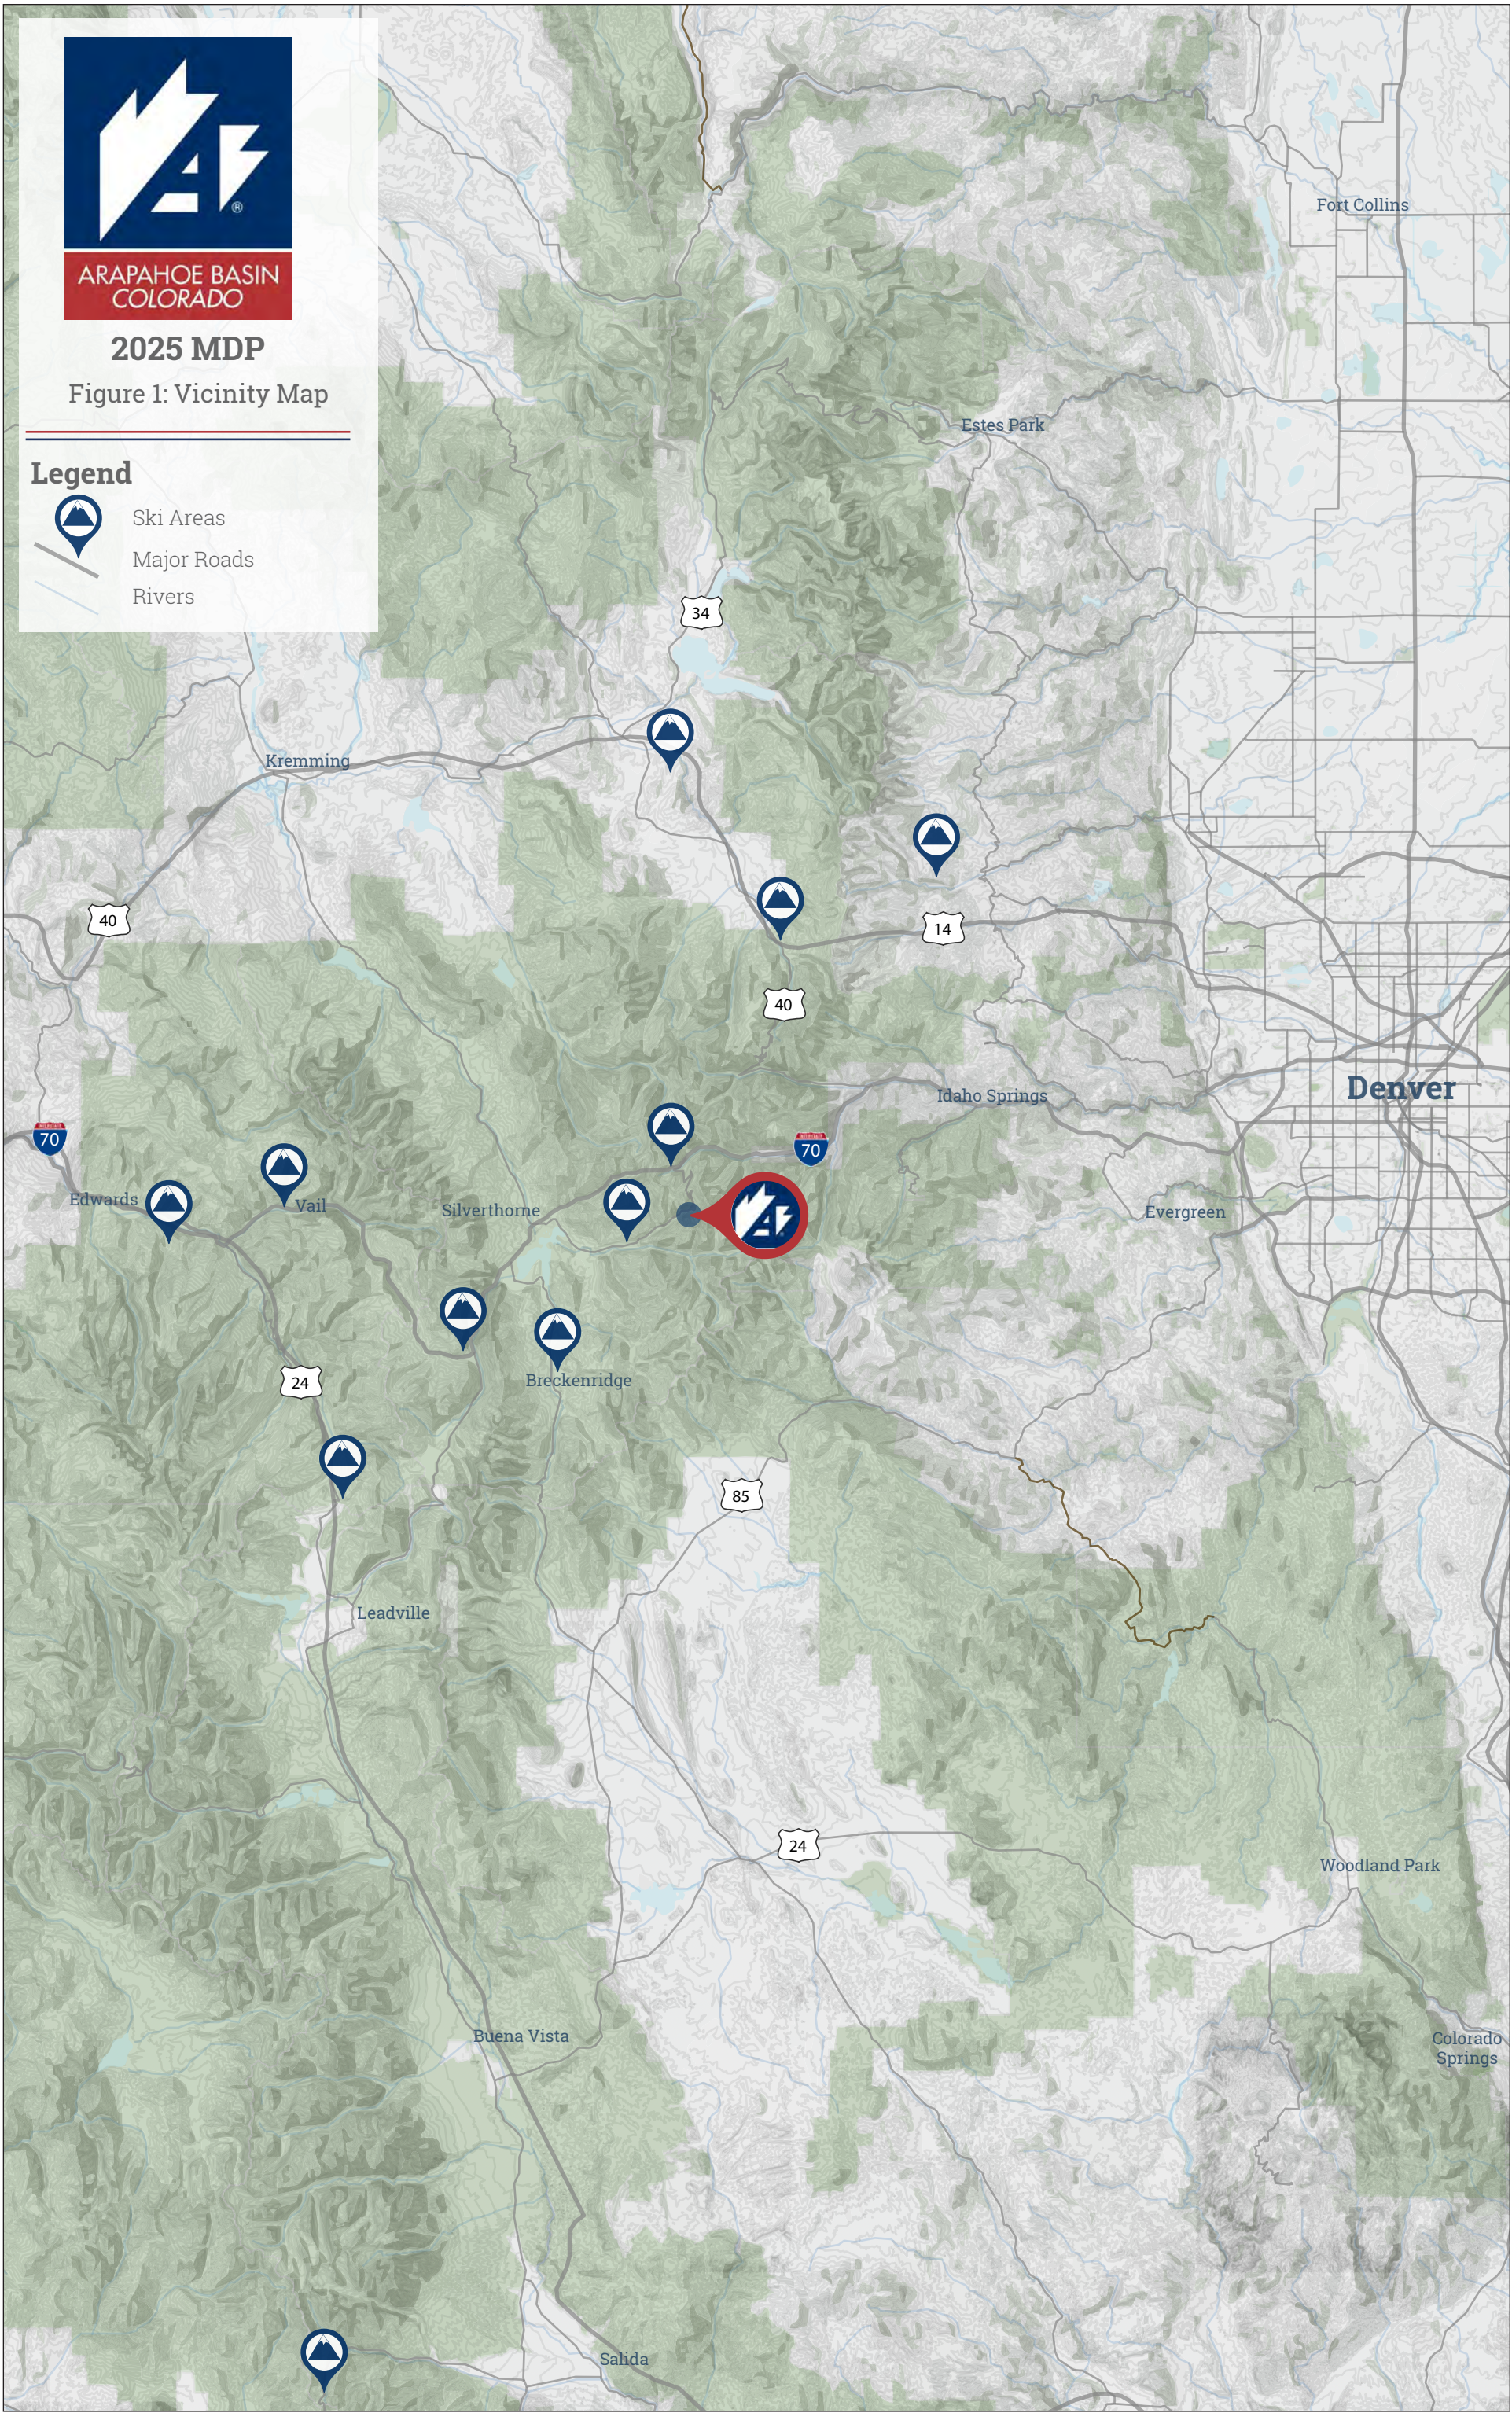






2025 MDP

Figure 2: Slope Analysis

Legend

- Ski Trails
  - Lifts
  - SUP Boundary
  - Operational Boundary
  - Roads
  - Mountain Roads
  - Buildings
  - Parking
  - Hike To/Back Terrain Fence
  - Access Gates
- 70% and Above
- 45 - 70%
- 25 - 45%
- 8 - 25%
- 0 - 8%

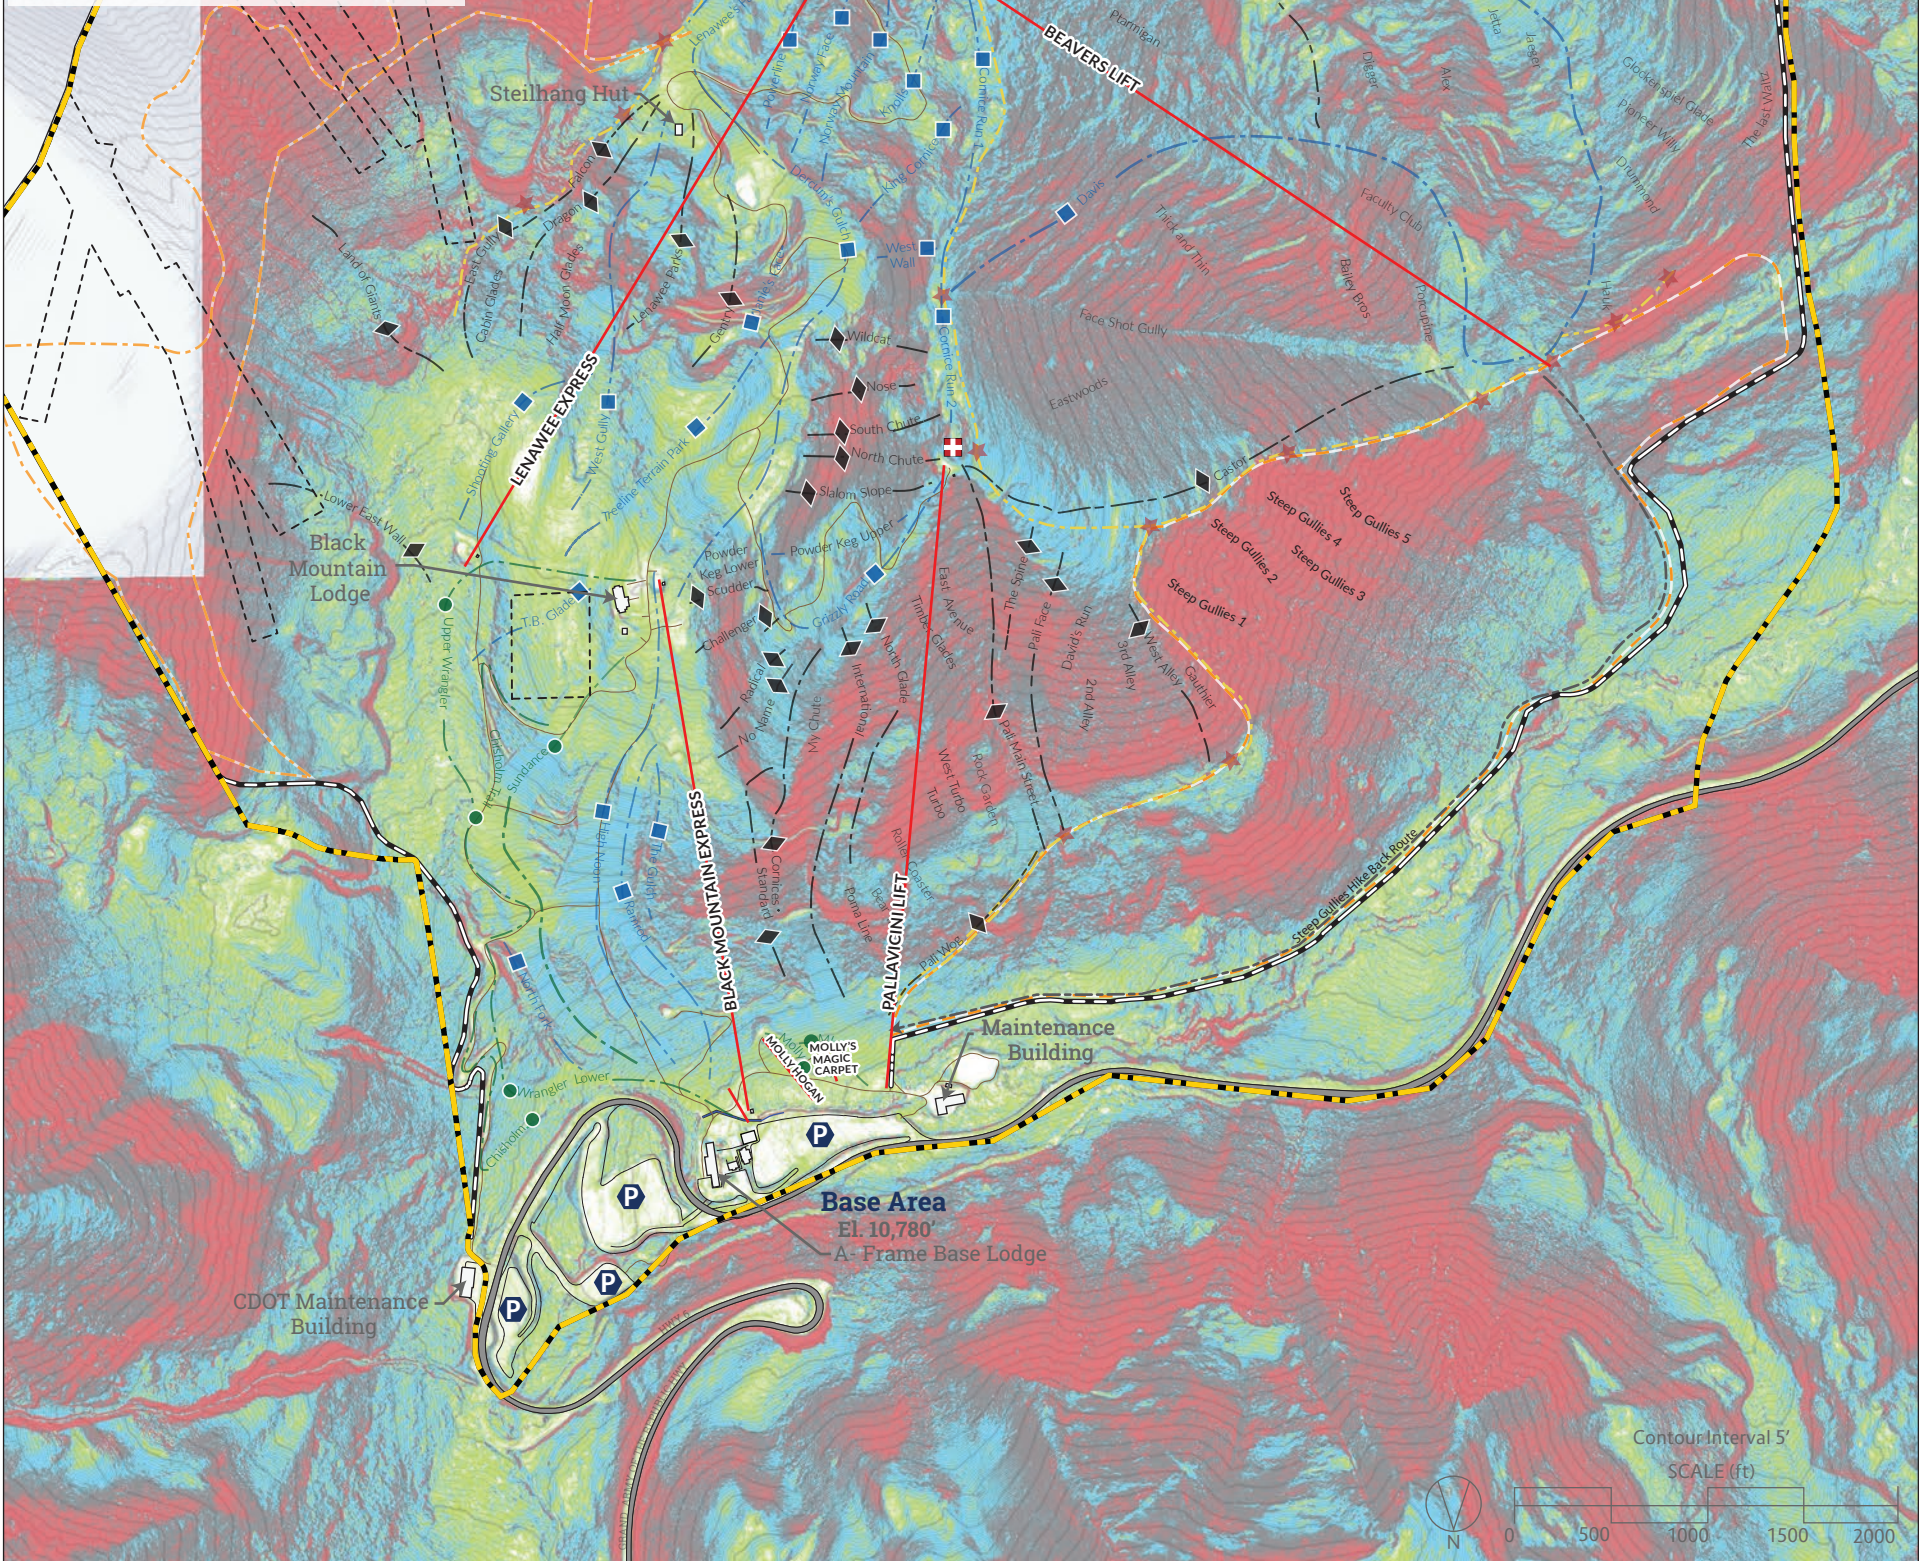







2025 MDP

Figure 3: Aspect Analysis

Legend

- Ski Trails
- Lifts
- SUP Boundary
- Operational Boundary
- Roads
- Mountain Roads
- Buildings
- Parking
- Hike To/Back Terrain
- Fence
- Access Gates

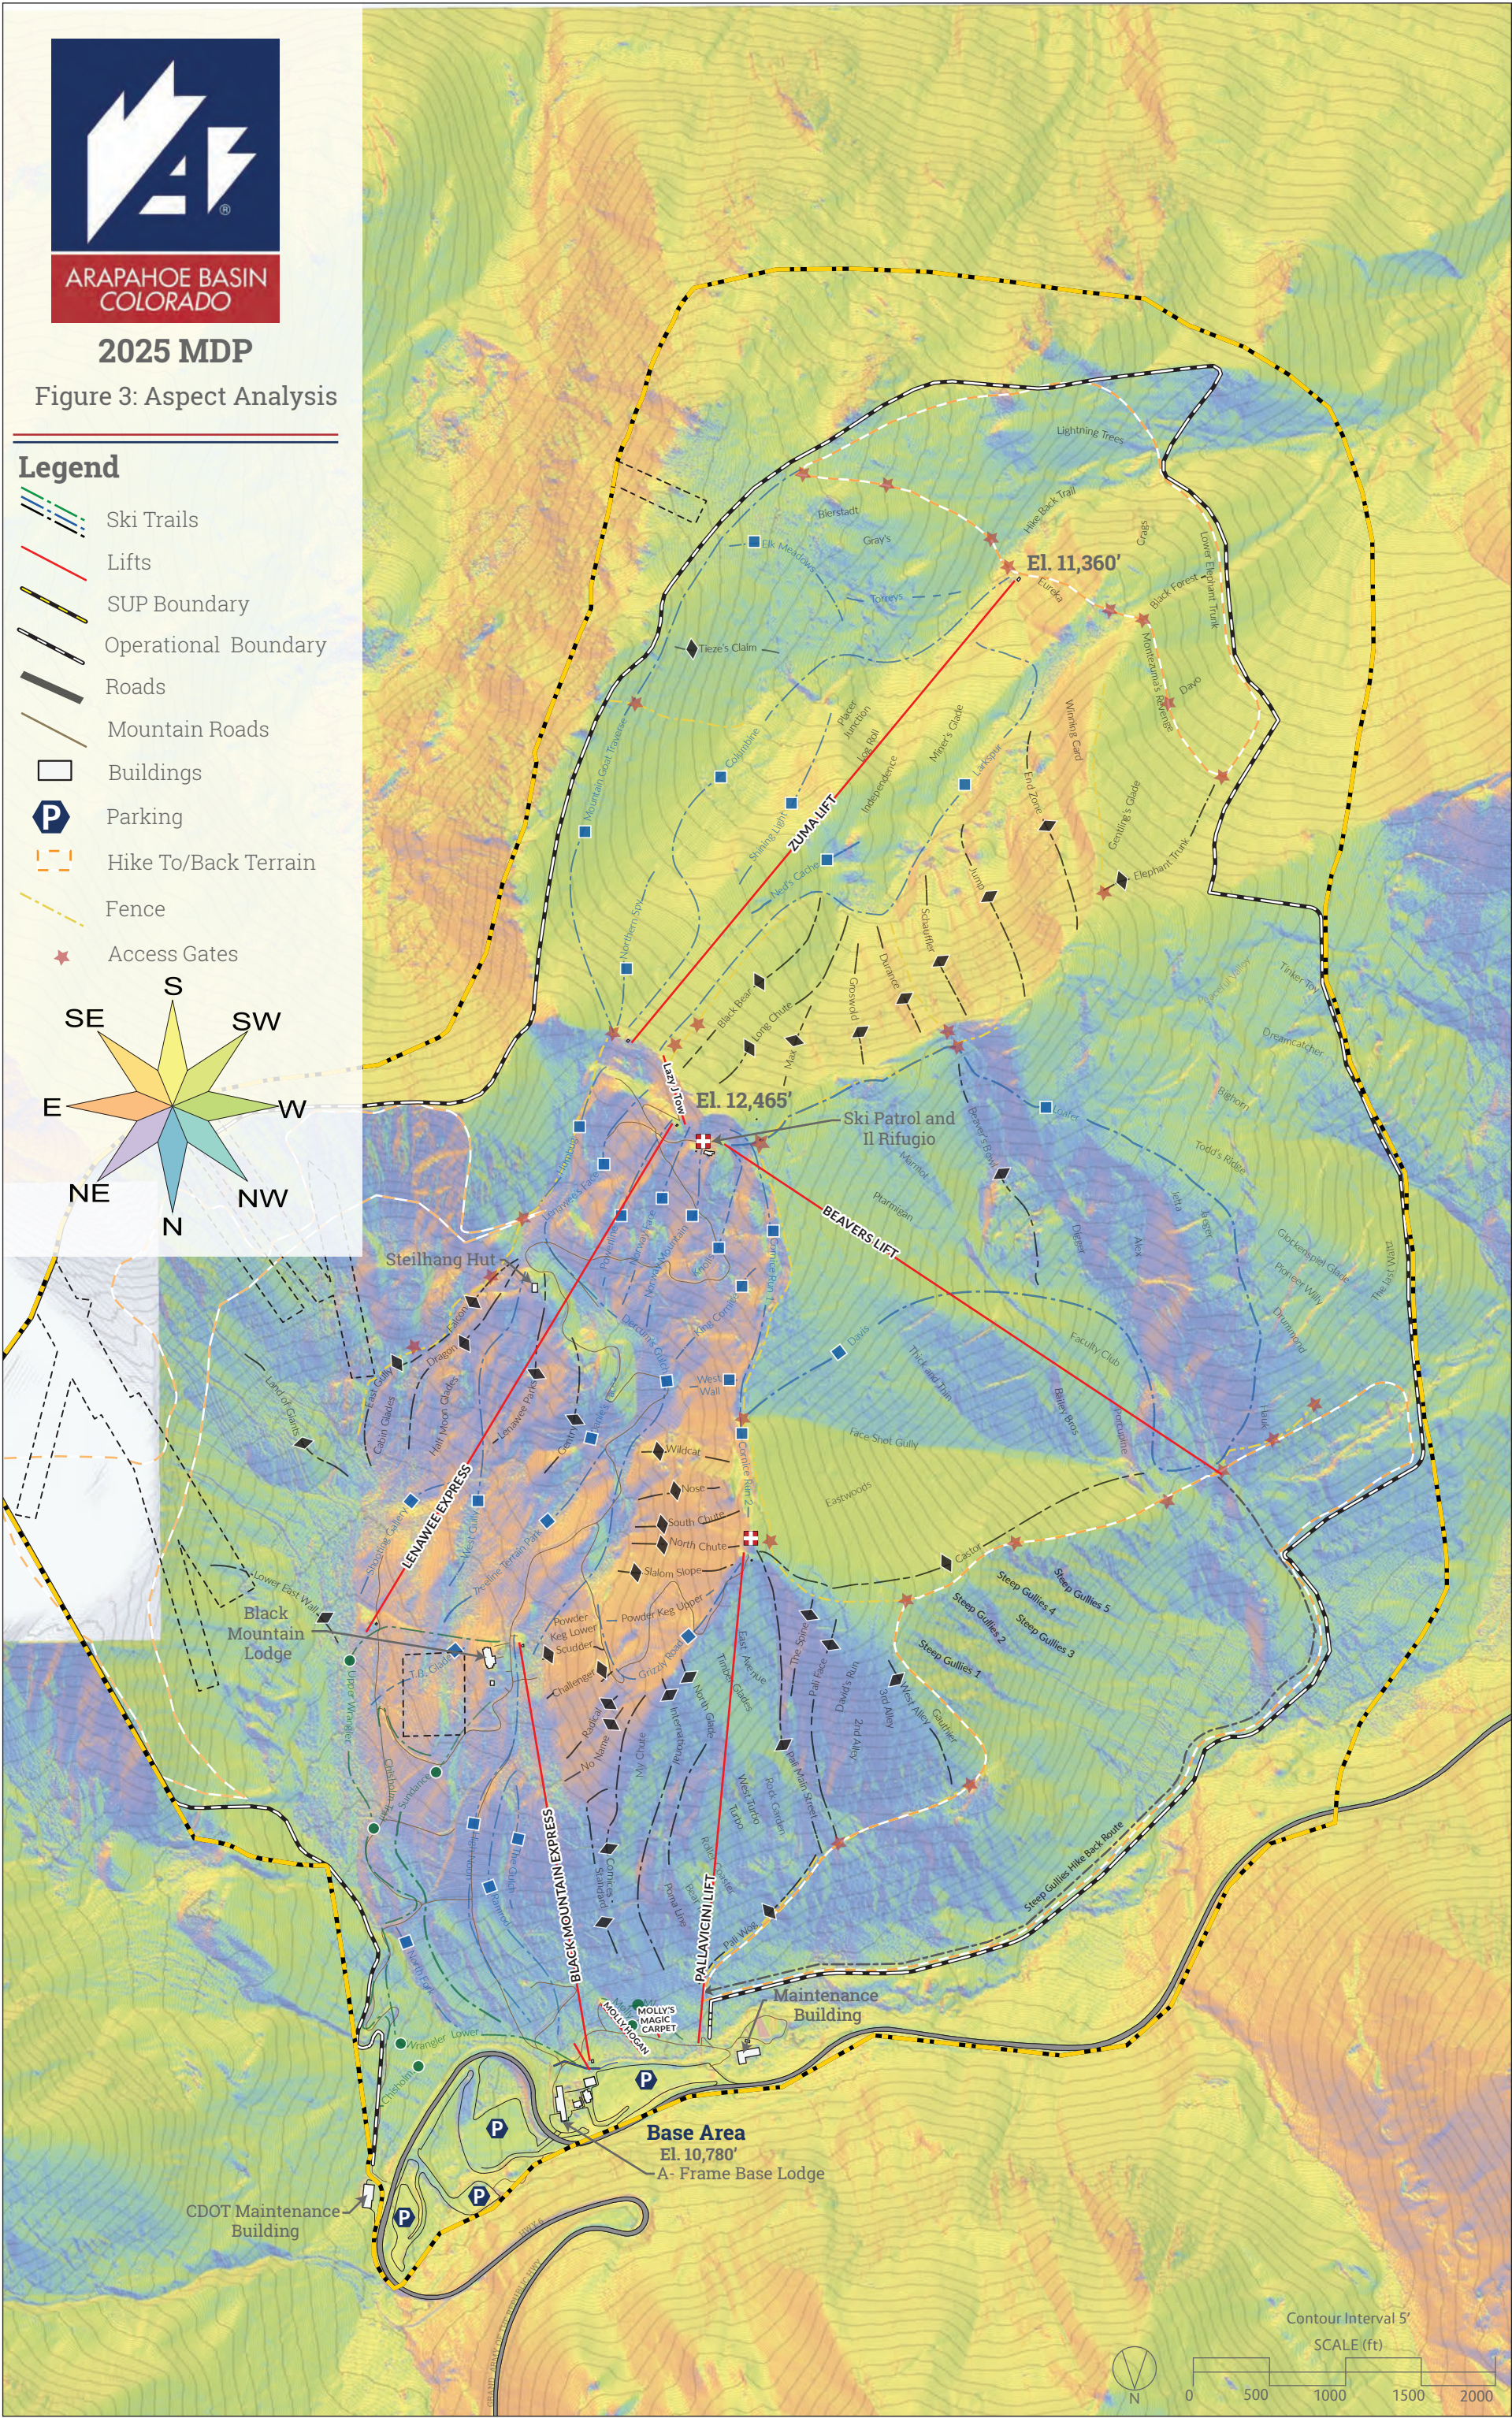

Contour Interval 5'  
SCALE (ft)  
0 500 1000 1500 2000






2025 MDP

Figure 4: Existing Conditions

Legend

- Ski Trails
- Lifts
- SUP Boundary
- Operational Boundary
- Roads
- Mountain Roads
- Buildings
- Parking
- Hike To Terrain
- Hike Back Terrain
- Closure
- Access Gates

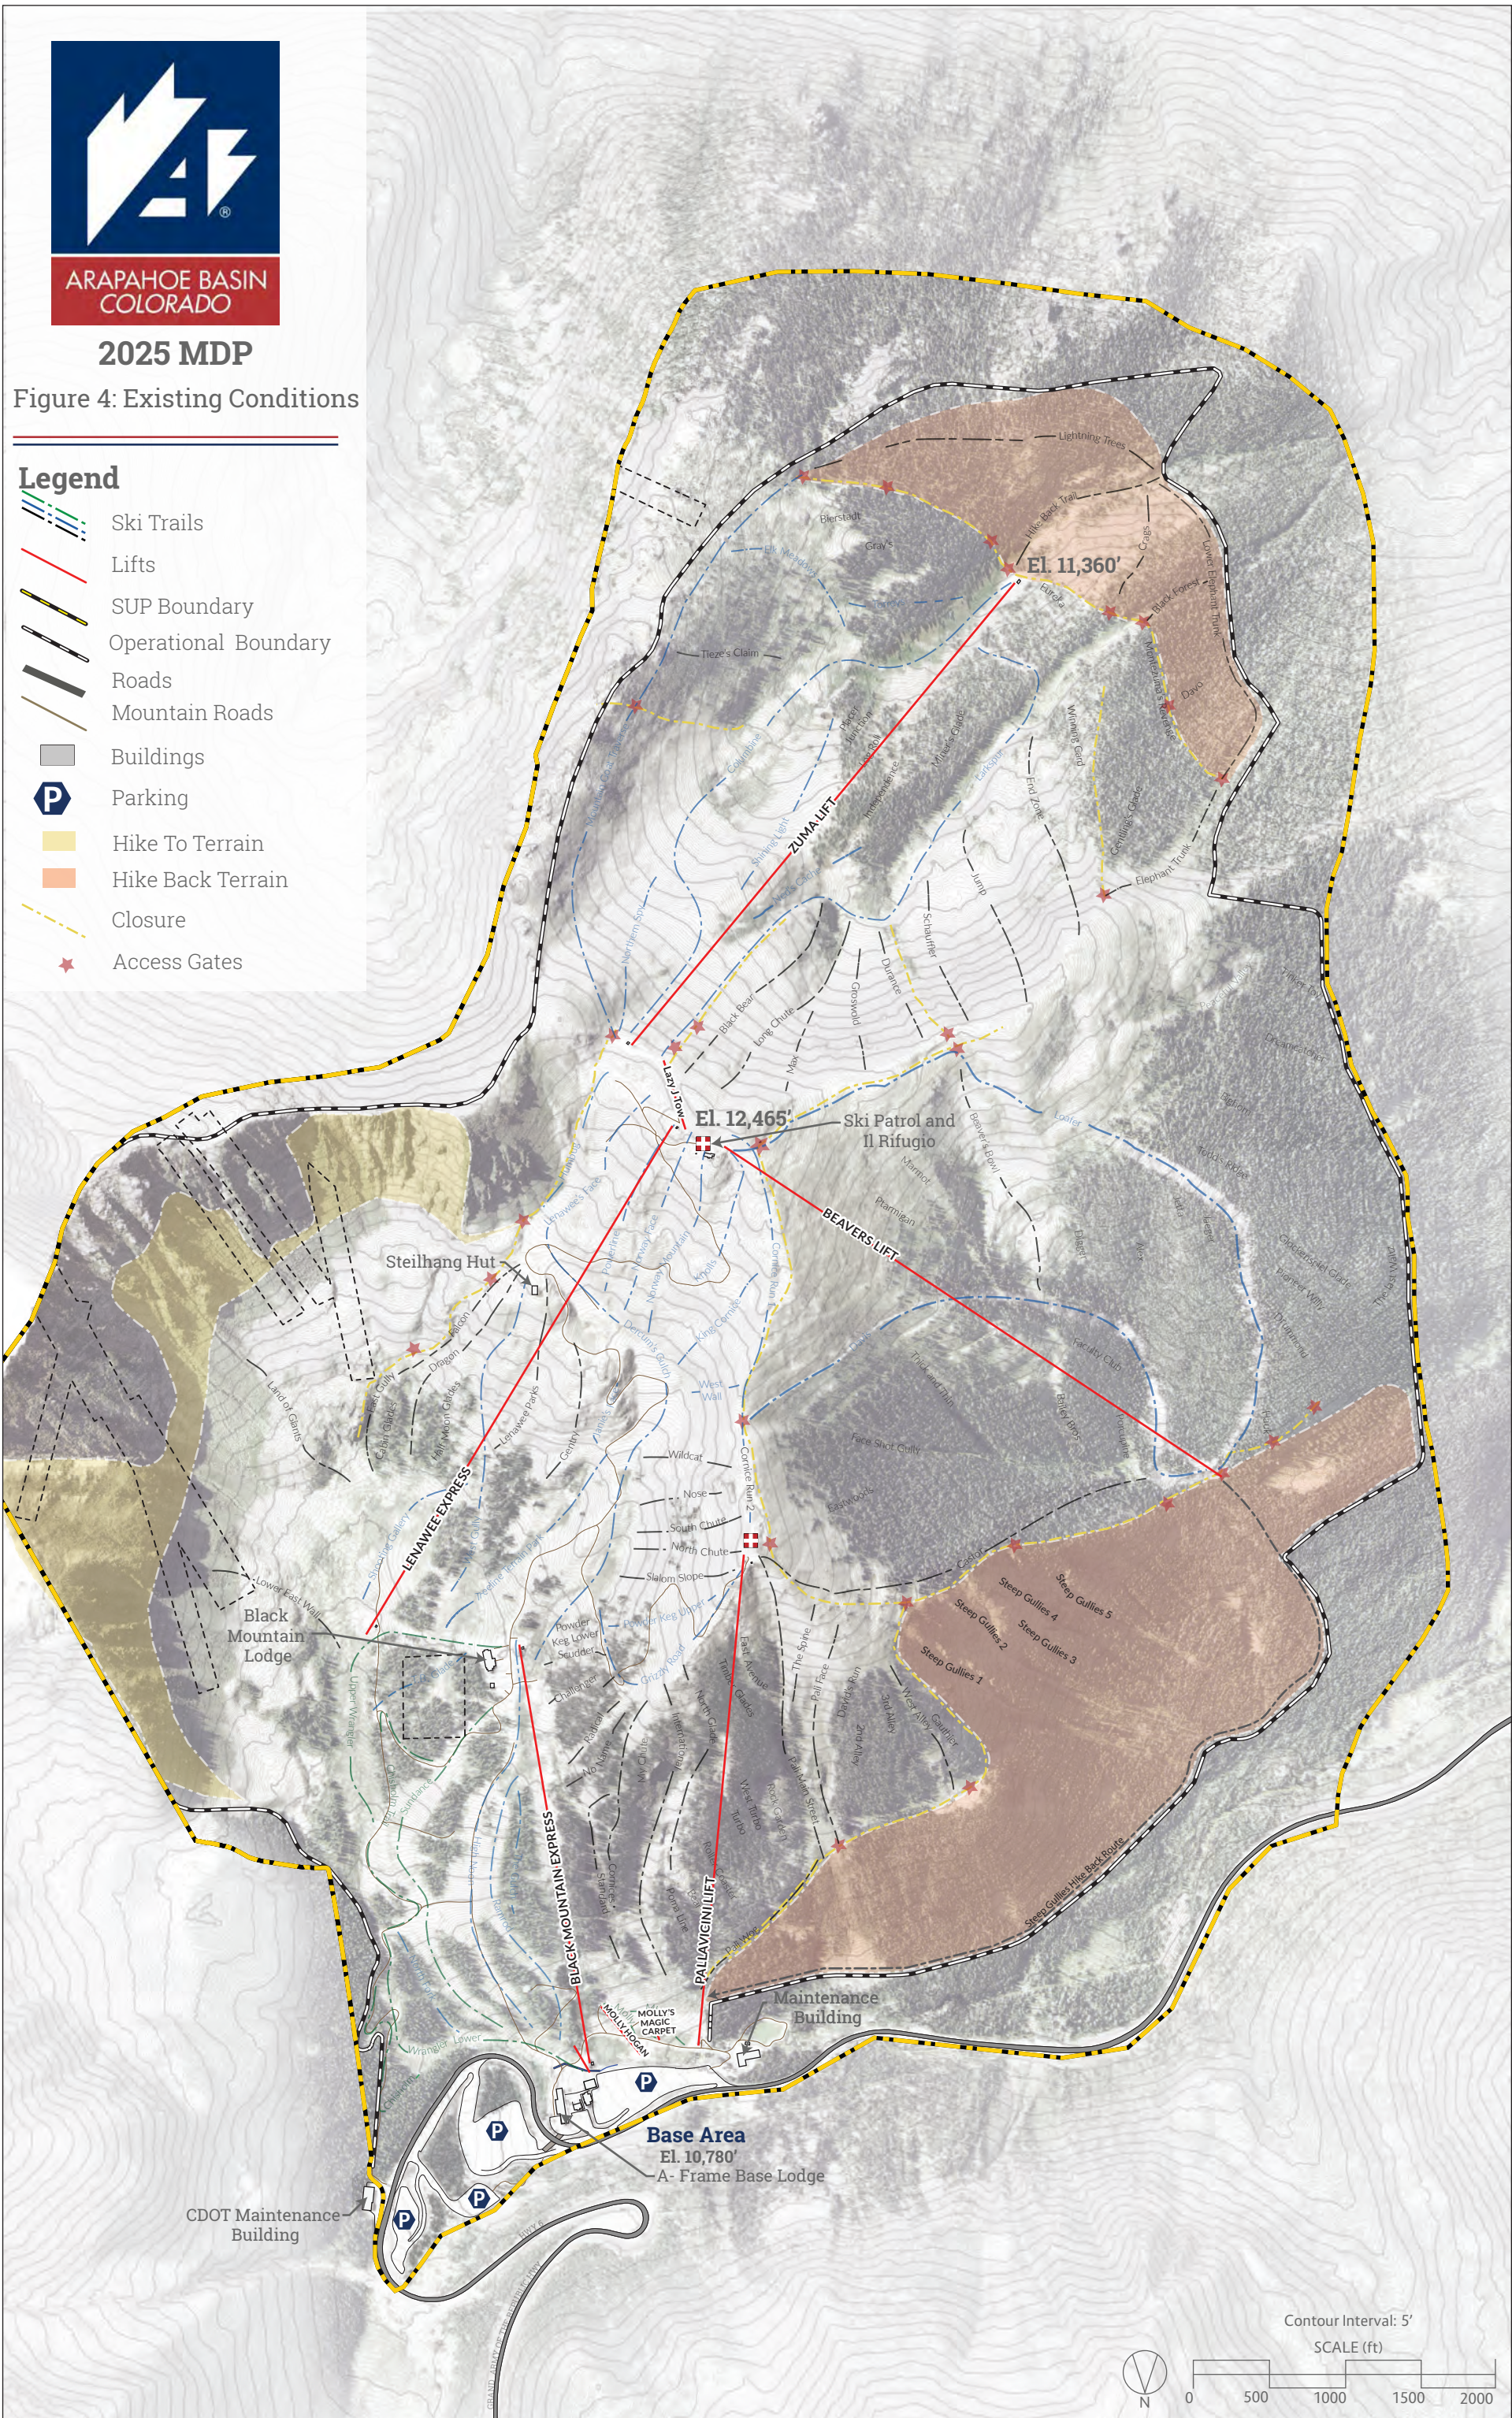









2025 MDP


Figure 6: Existing Summer Conditions

Legend

- Summer Use Lifts
- Winter Use Lifts
- Multi-use Trails
- Mountain Bike Trail
- Hiking Trail
- SUP Boundary
- Operational Boundary
- Roads
- Mountain Roads
- Building
- Parking

Summer Zones:

- Zone 1
- Zone 2
- Zone 3
- Zone 4
- Zone 5

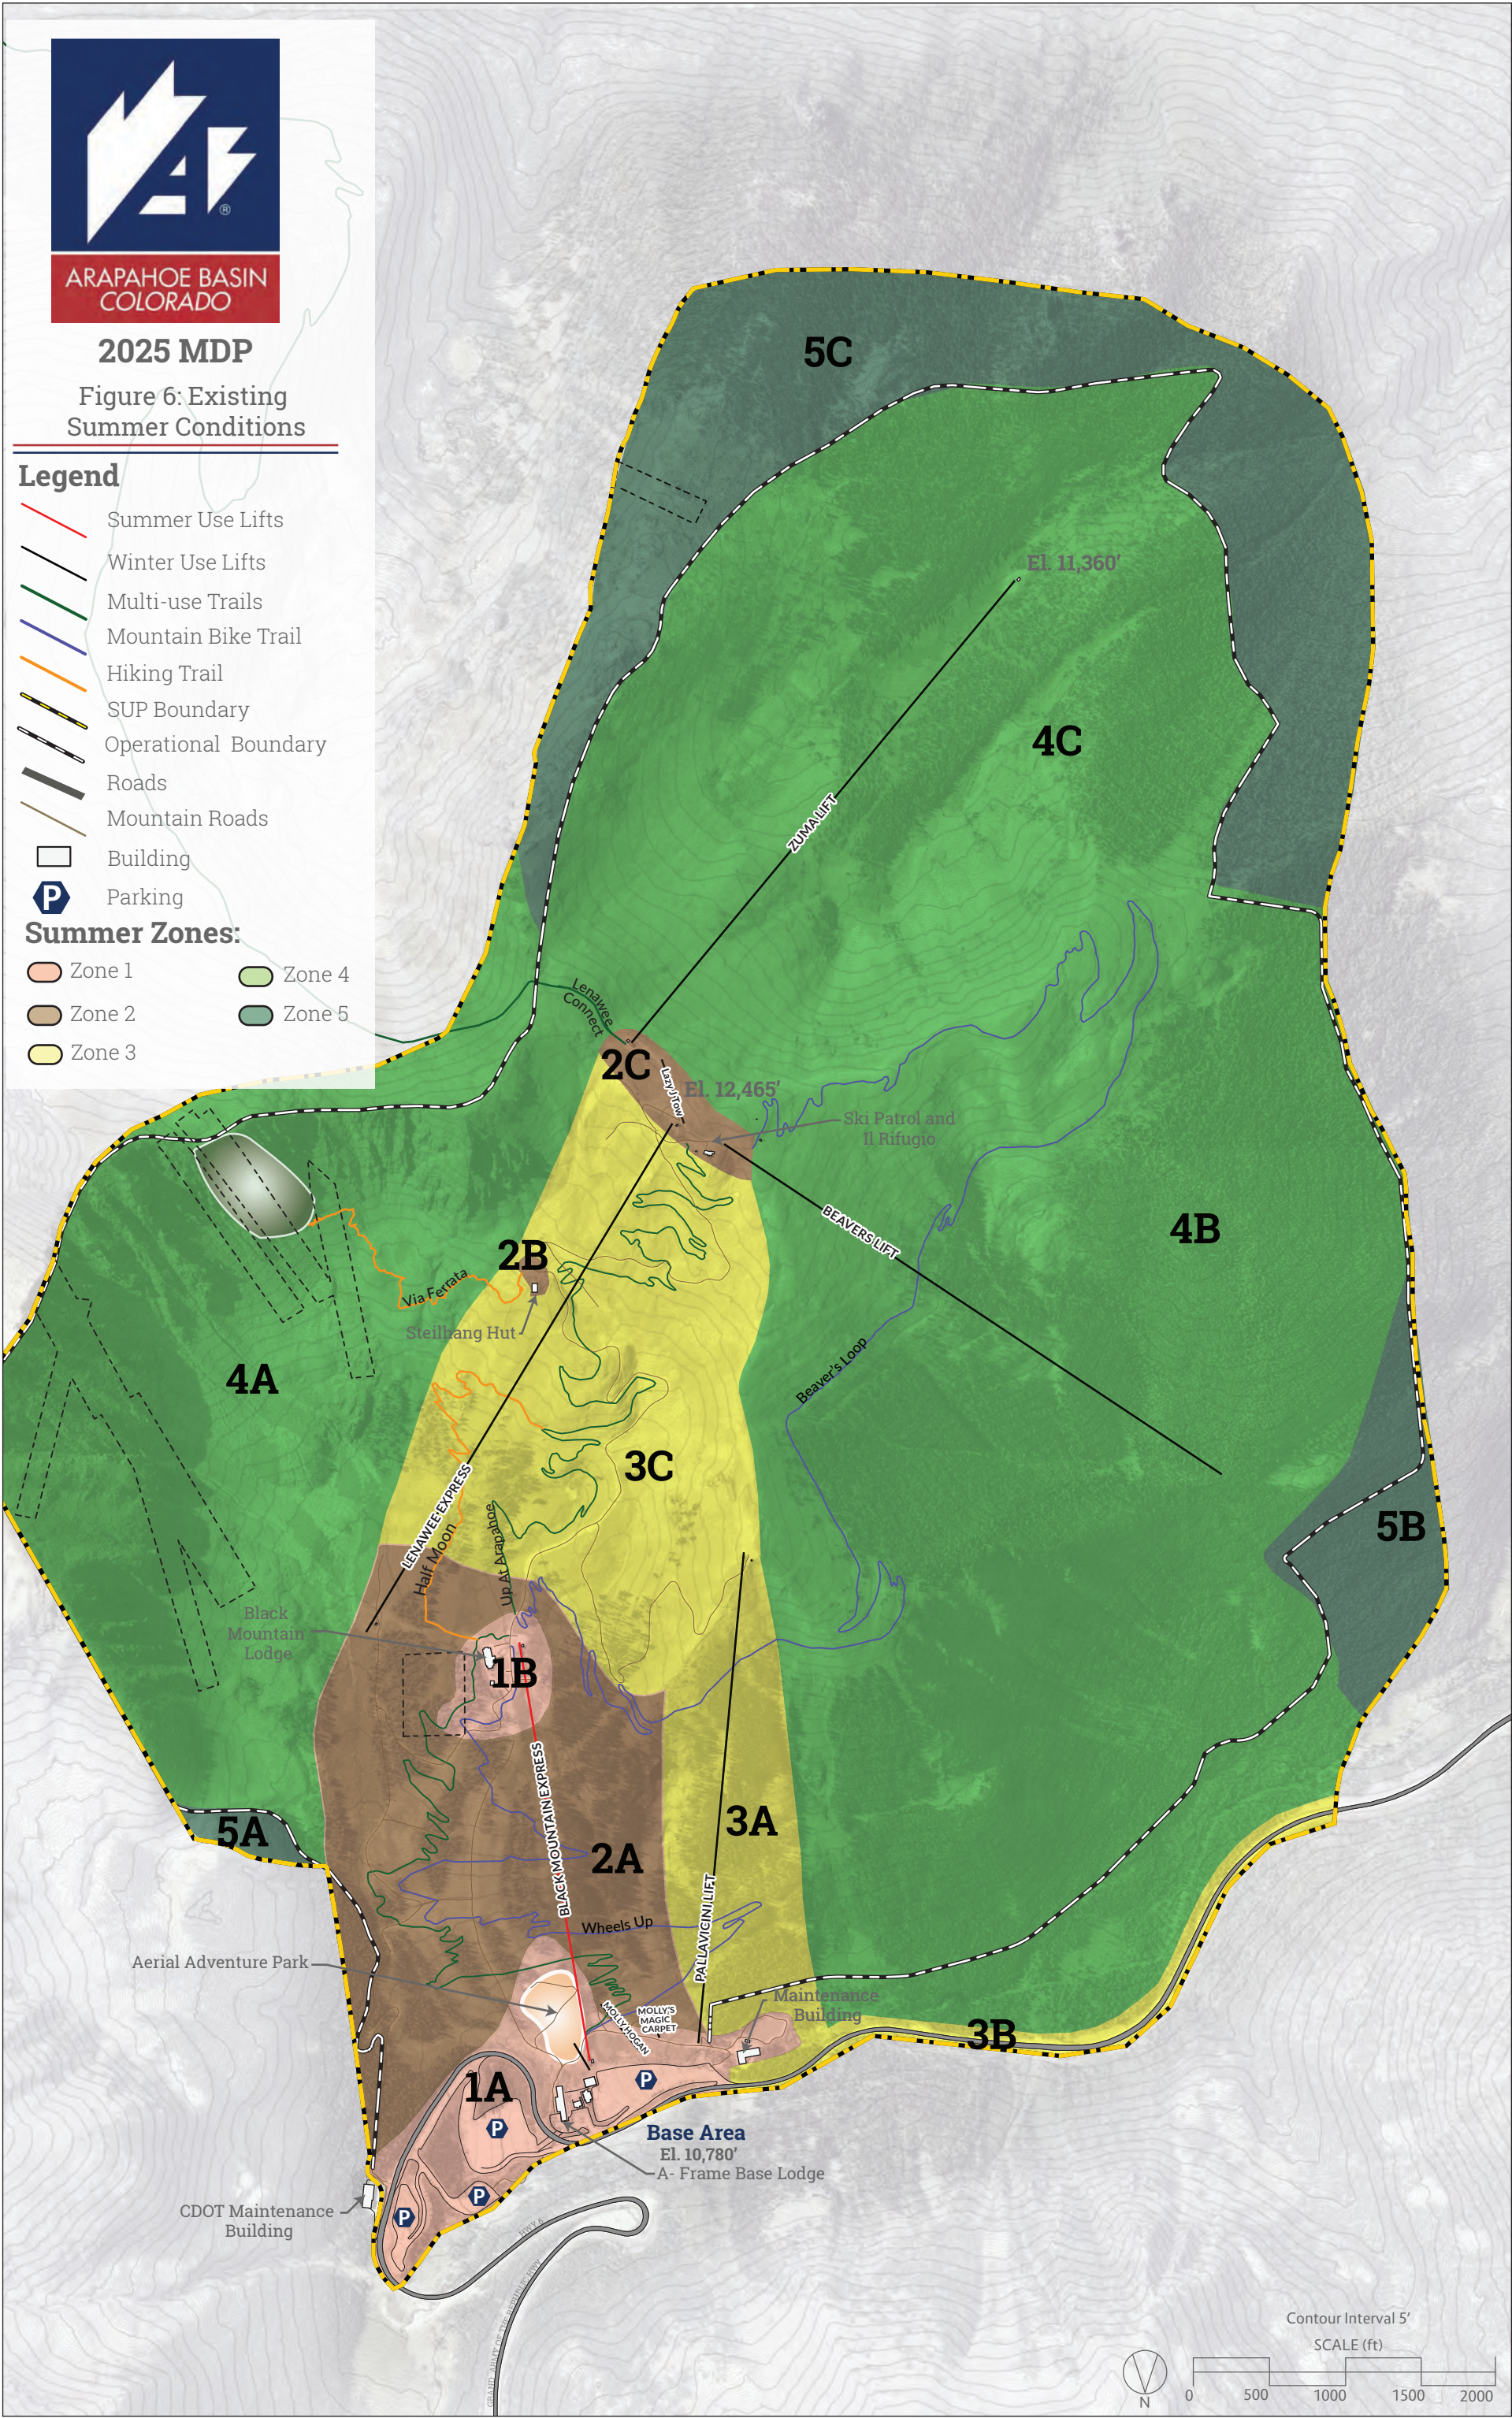





2025 MDP

Figure 7: Upgrade Plan

Legend

- Planned

Lifts

Buildings

Parking

Remote Avalanche System Area

Day Cabin Site
- Existing

Ski Trails

Lifts

SUP Boundary

Operational Boundary

Roads

Buildings


Parking

Closure

Hike To Terrain

Hike Back Terrain

Access Gates

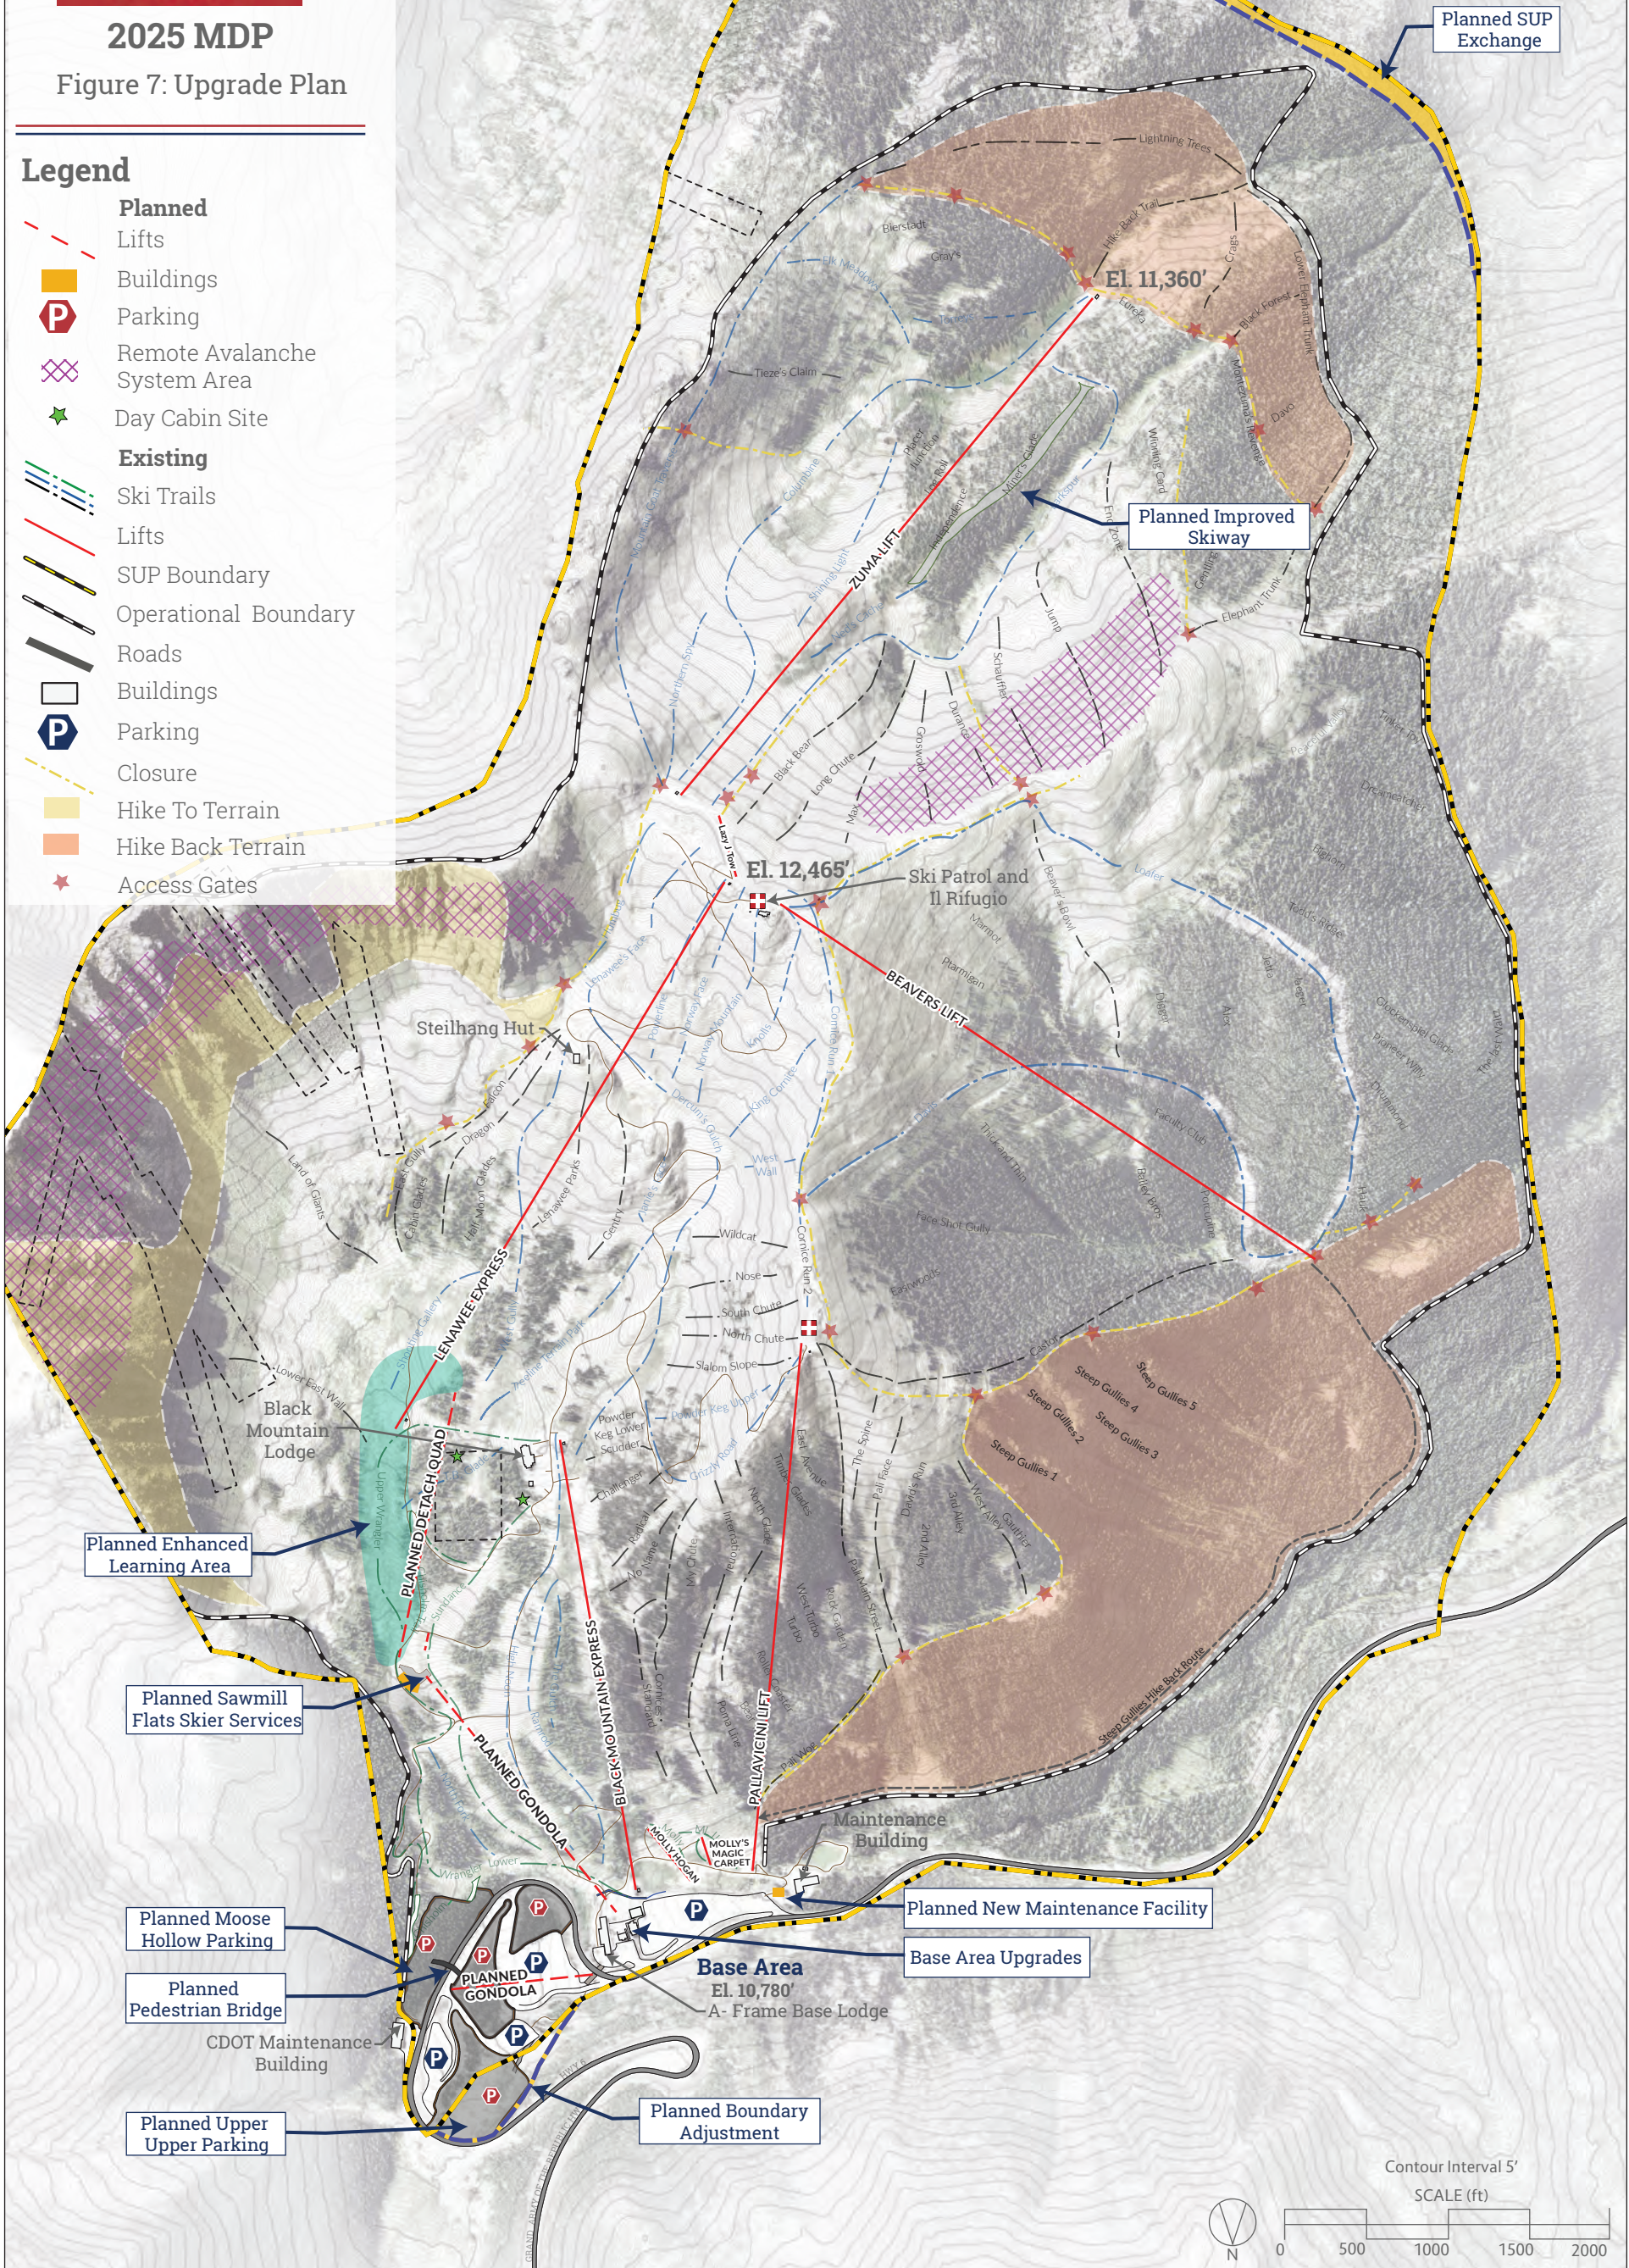





### Figure 8: Snowmaking Upgrade Plan


## Legend

- Planned**

  - Snowmaking Coverage
  - Lifts
  - Buildings
  - Improved Skiway
  - Parking
  - Remote Avalanche System Area
  - Boundary Adjustment
  - Day Cabin Site

**Existing**

  - Snowmaking Coverage
  - Ski Trails
  - Lifts
  - SUP Boundary
  - Operations Boundary
  - Roads
  - Mountain Roads
  - Buildings
  - Parking
  - Closure
  - Access Gates

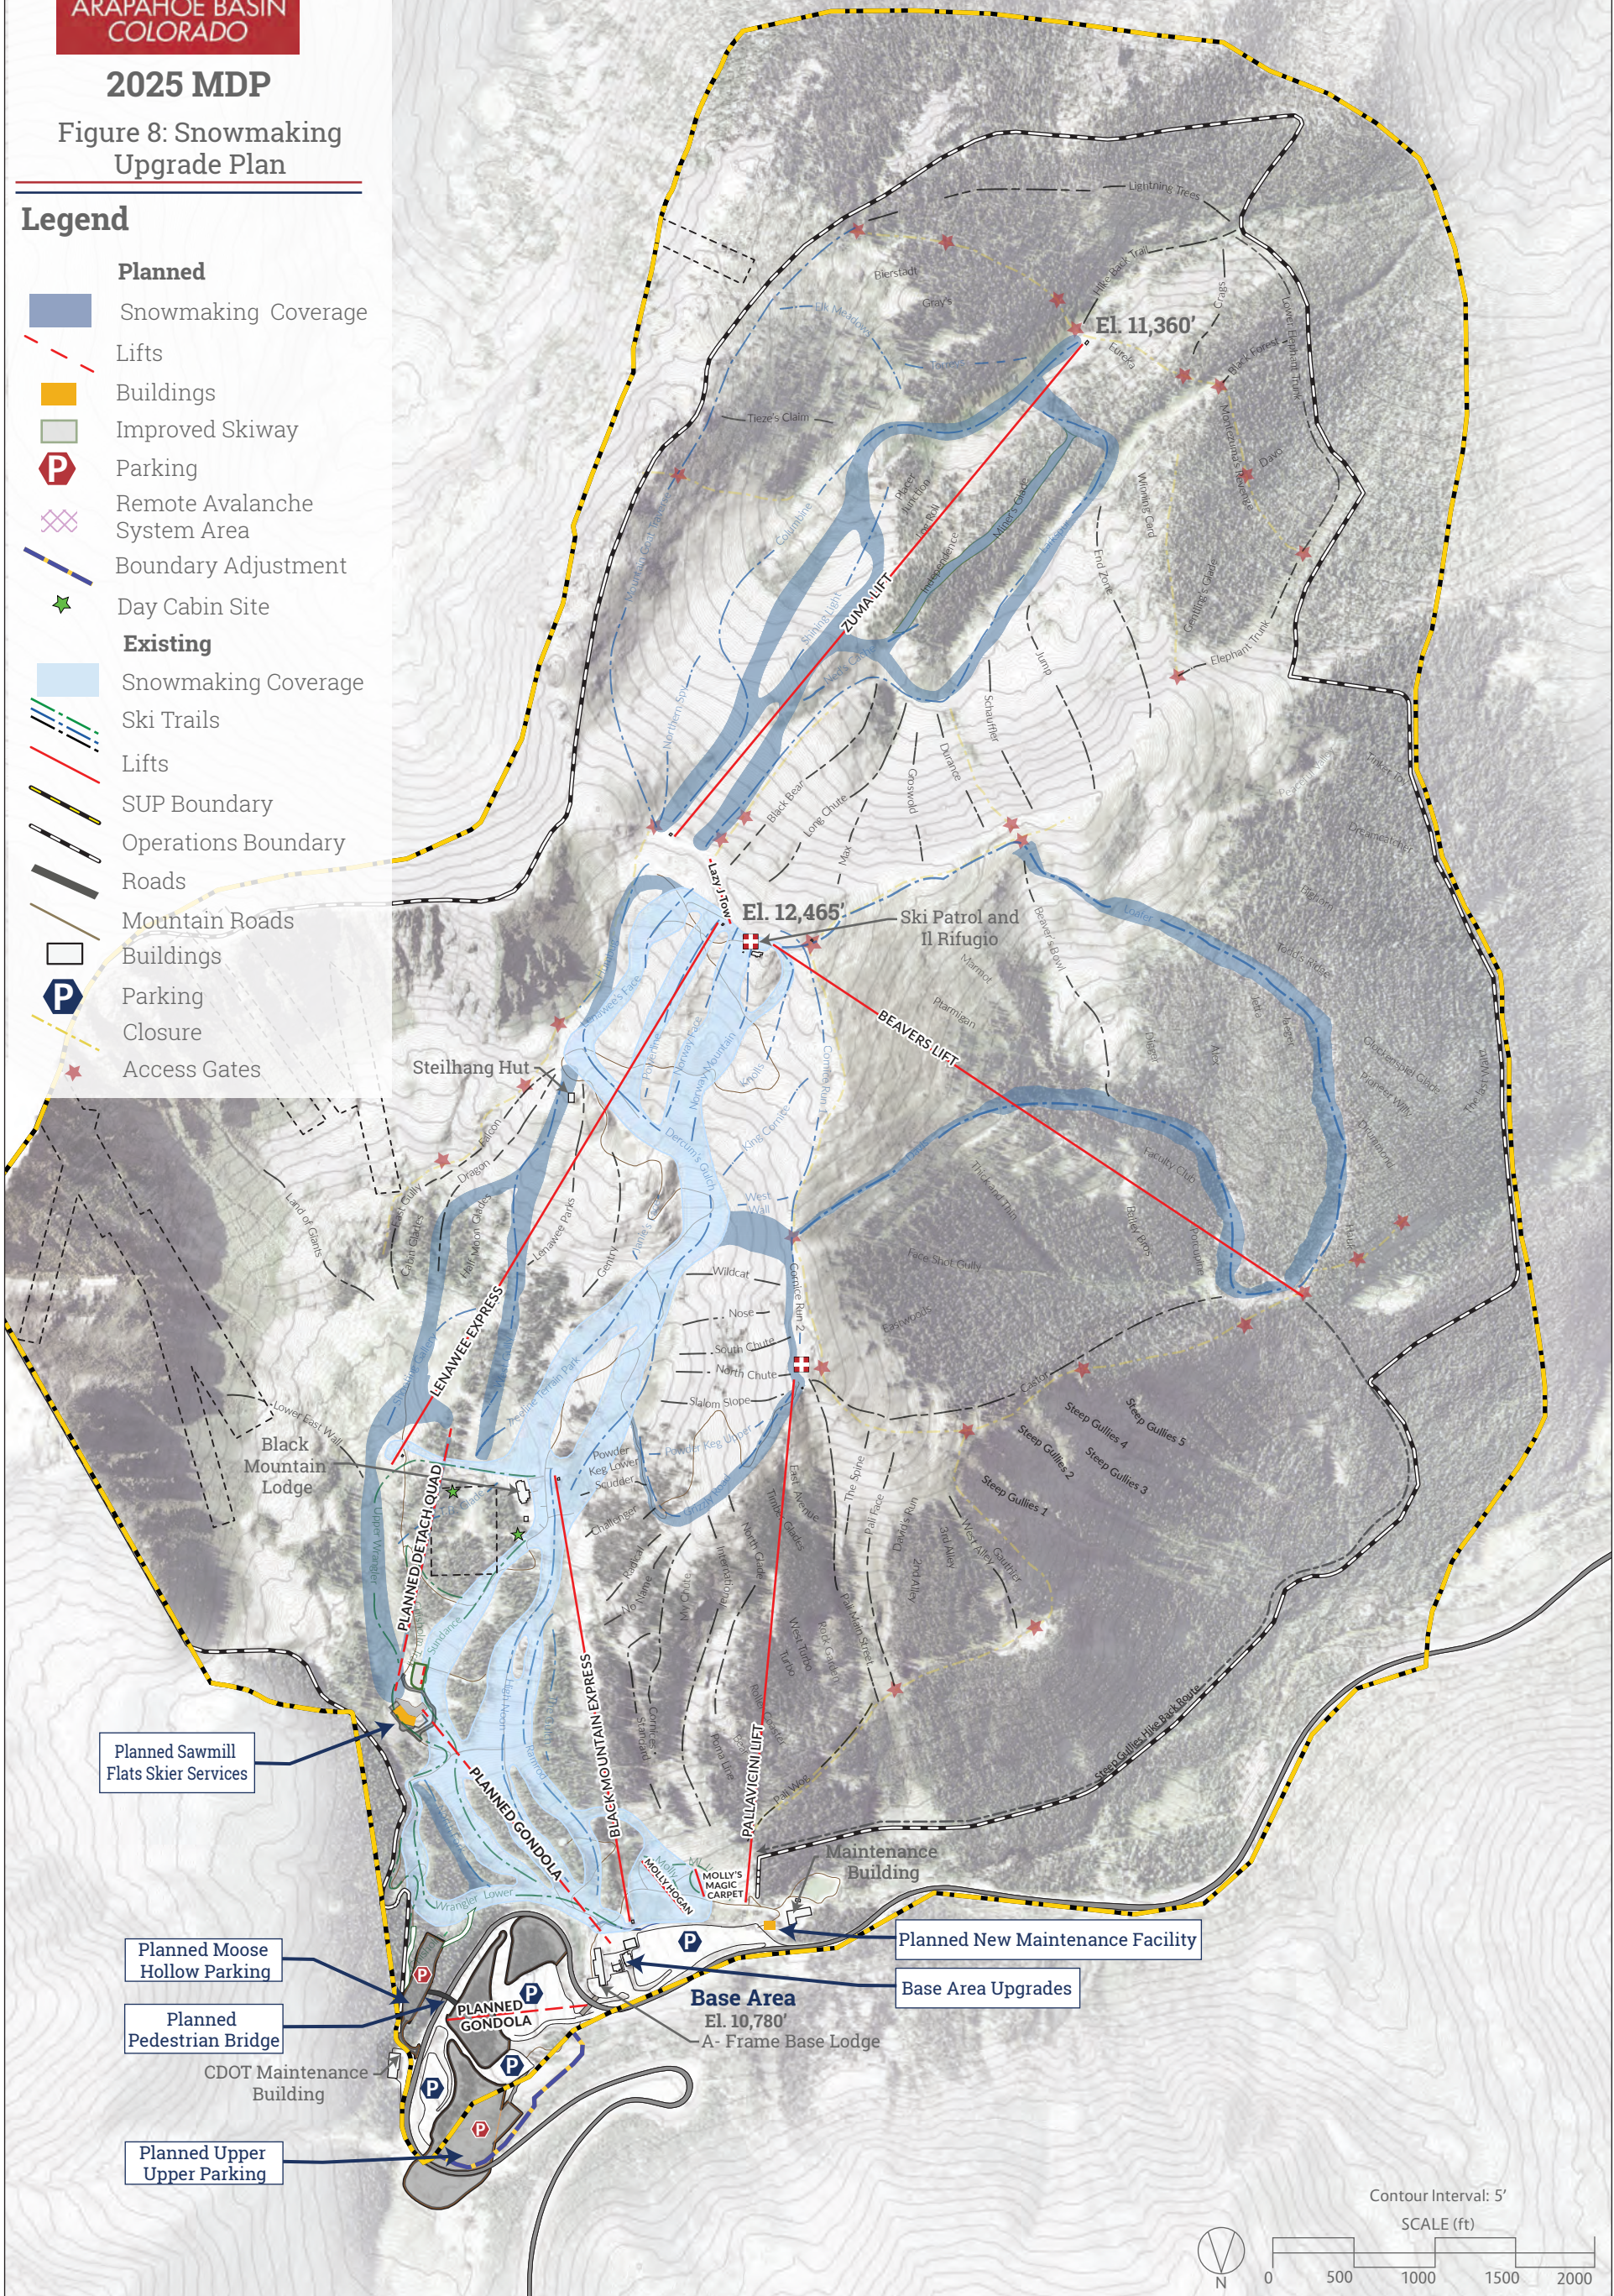






2025 MDP

Figure 9:  
Summer Upgrade Plan

Legend

- Planned**
- Winter Use Lift
  - Summer Use Lift
  - Parking
  - Mountain Bike Trail
  - Hiking Trail
  - Day Cabin Site
- Existing**
- Summer Use Lift
  - Winter Use Lift
  - Multi-Use Trail
  - Mountain Bike Trail
  - Hiking Trail
  - SUP Boundary
  - Operational Boundary
  - Mountain Road
  - Buildings
  - Parking

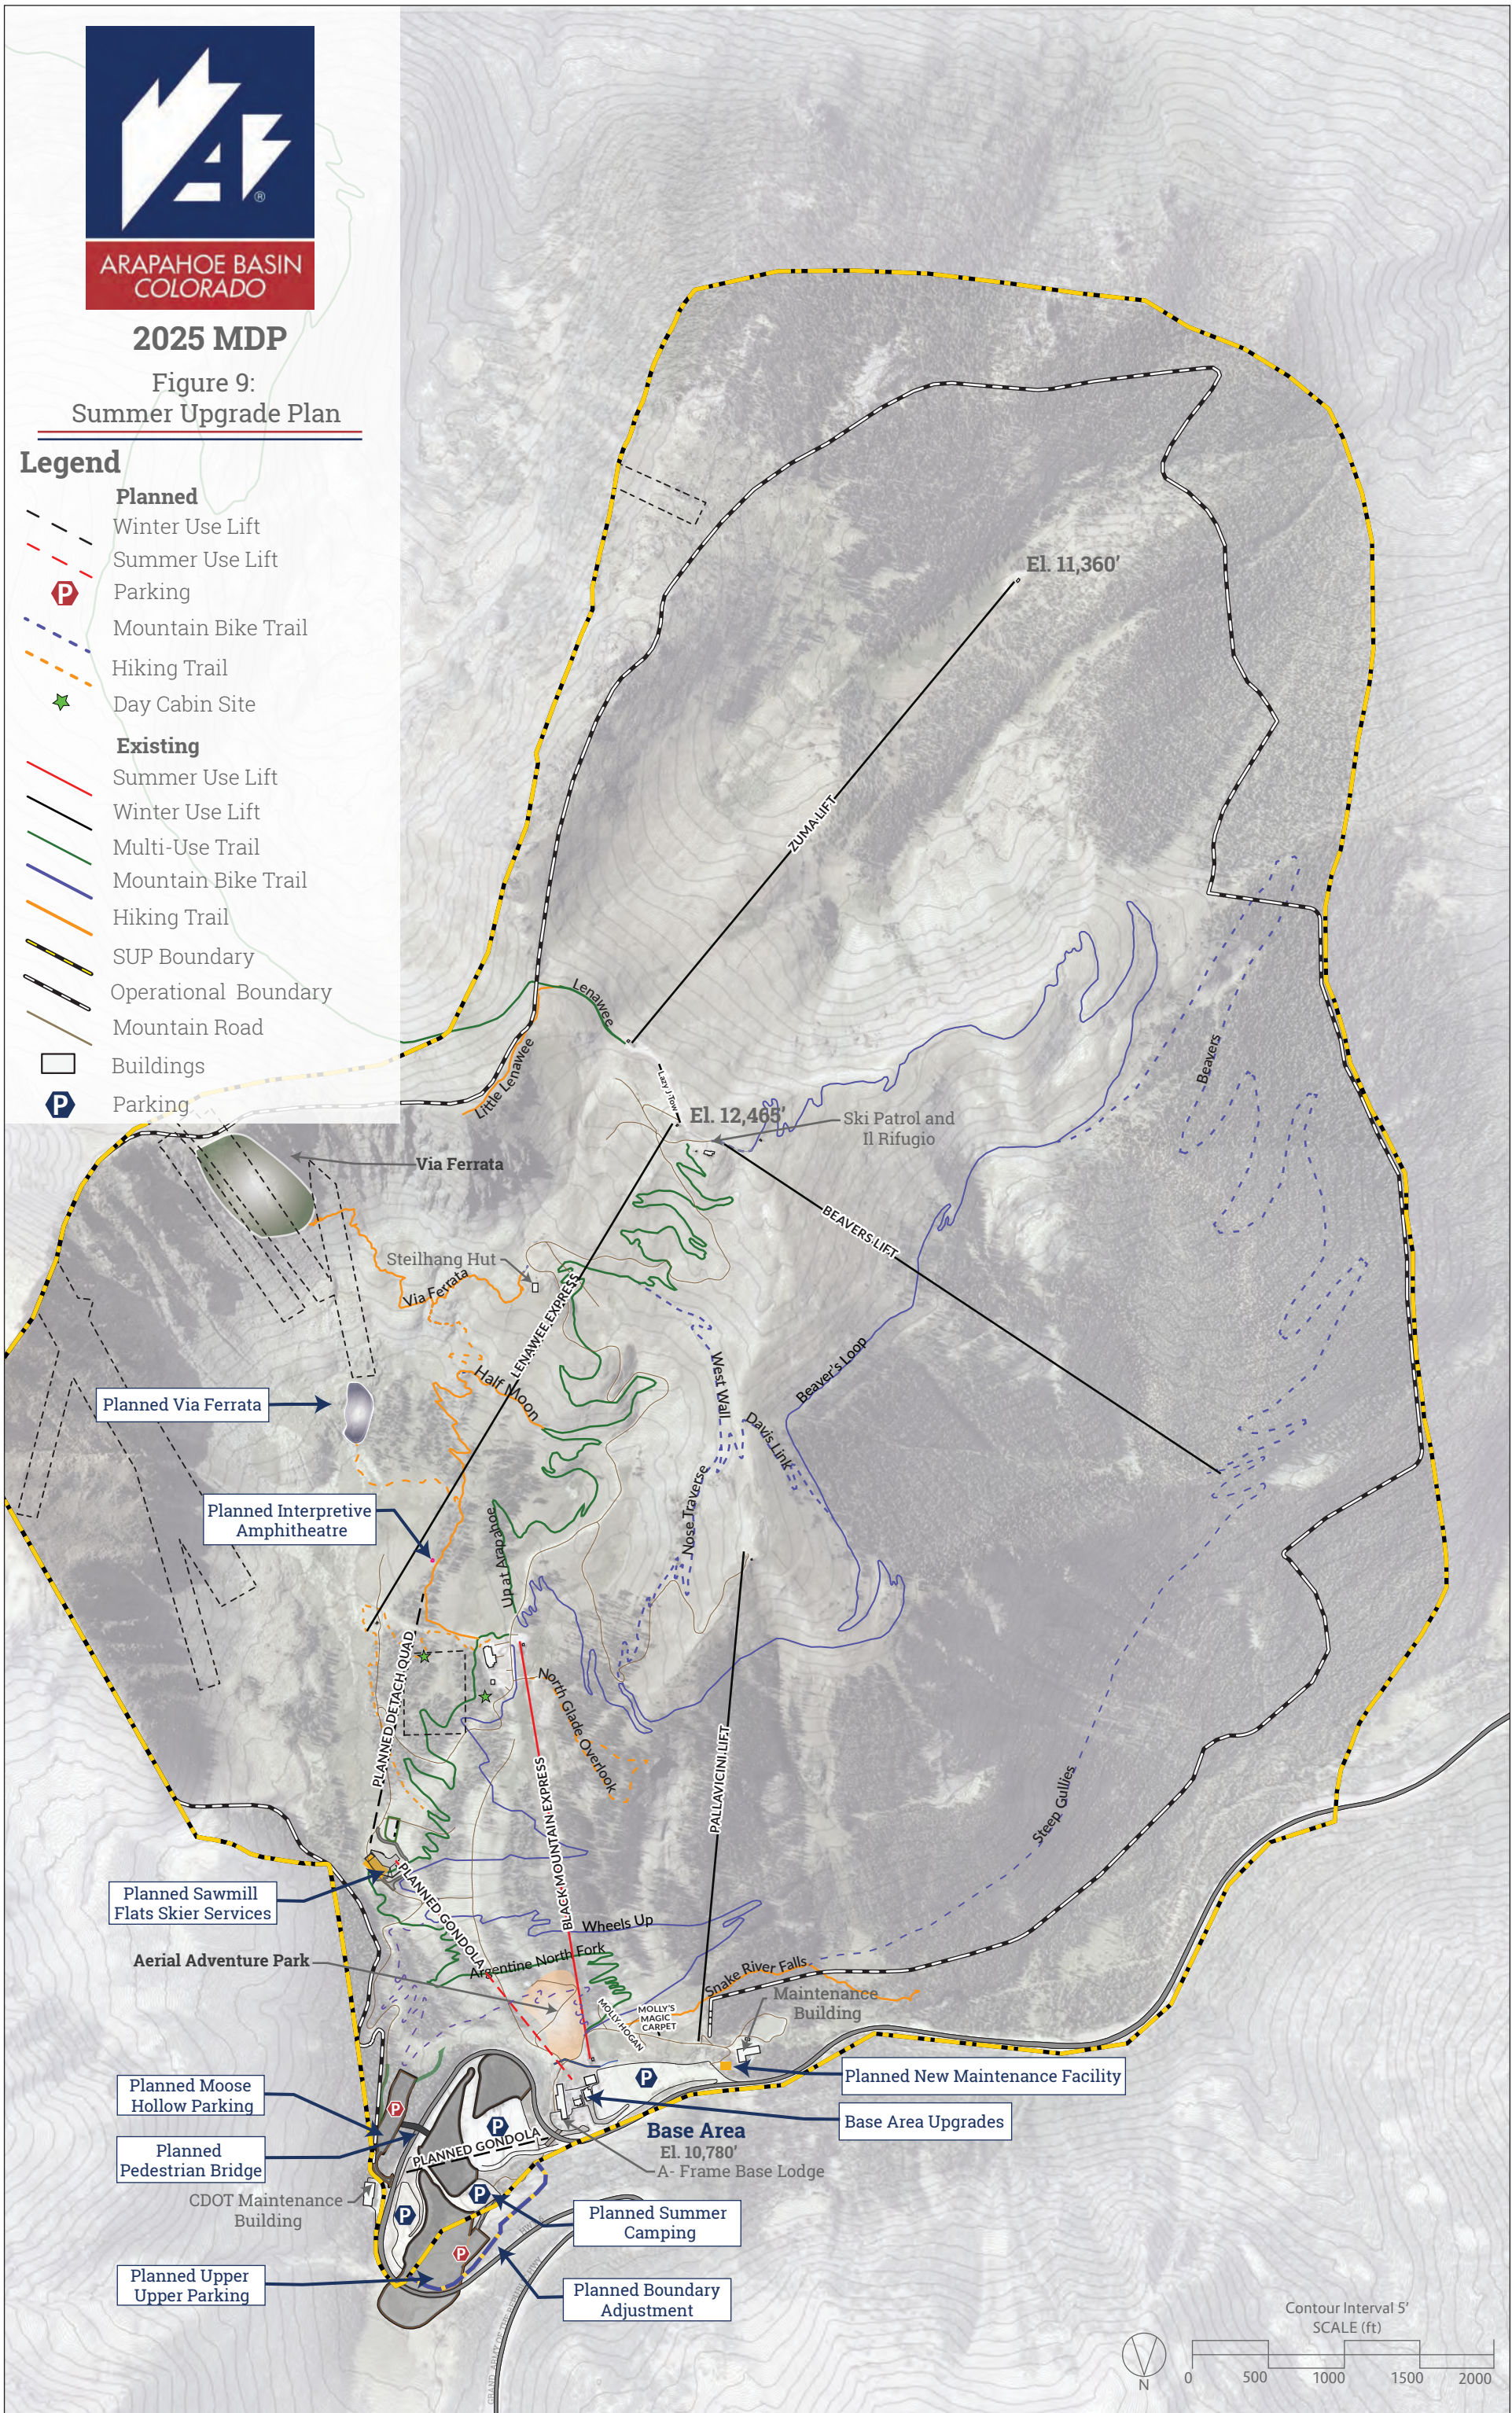



Legend

- Planned**
- Lifts
  - Buildings
  - Parking
  - Boundary Adjustment
  - Day Cabin Site

- Existing**
- Summer Use Lift
  - Winter Use Lift
  - SUP Boundary
  - Operational Boundary
  - Road
  - Mountain Road
  - Building
  - Parking


Summer Zones:

- |        |        |
|--------|--------|
| Zone 1 | Zone 4 |
| Zone 2 | Zone 5 |
| Zone 3 |        |



2025 MDP

Figure 10:  
Summer Zones Upgrade Plan

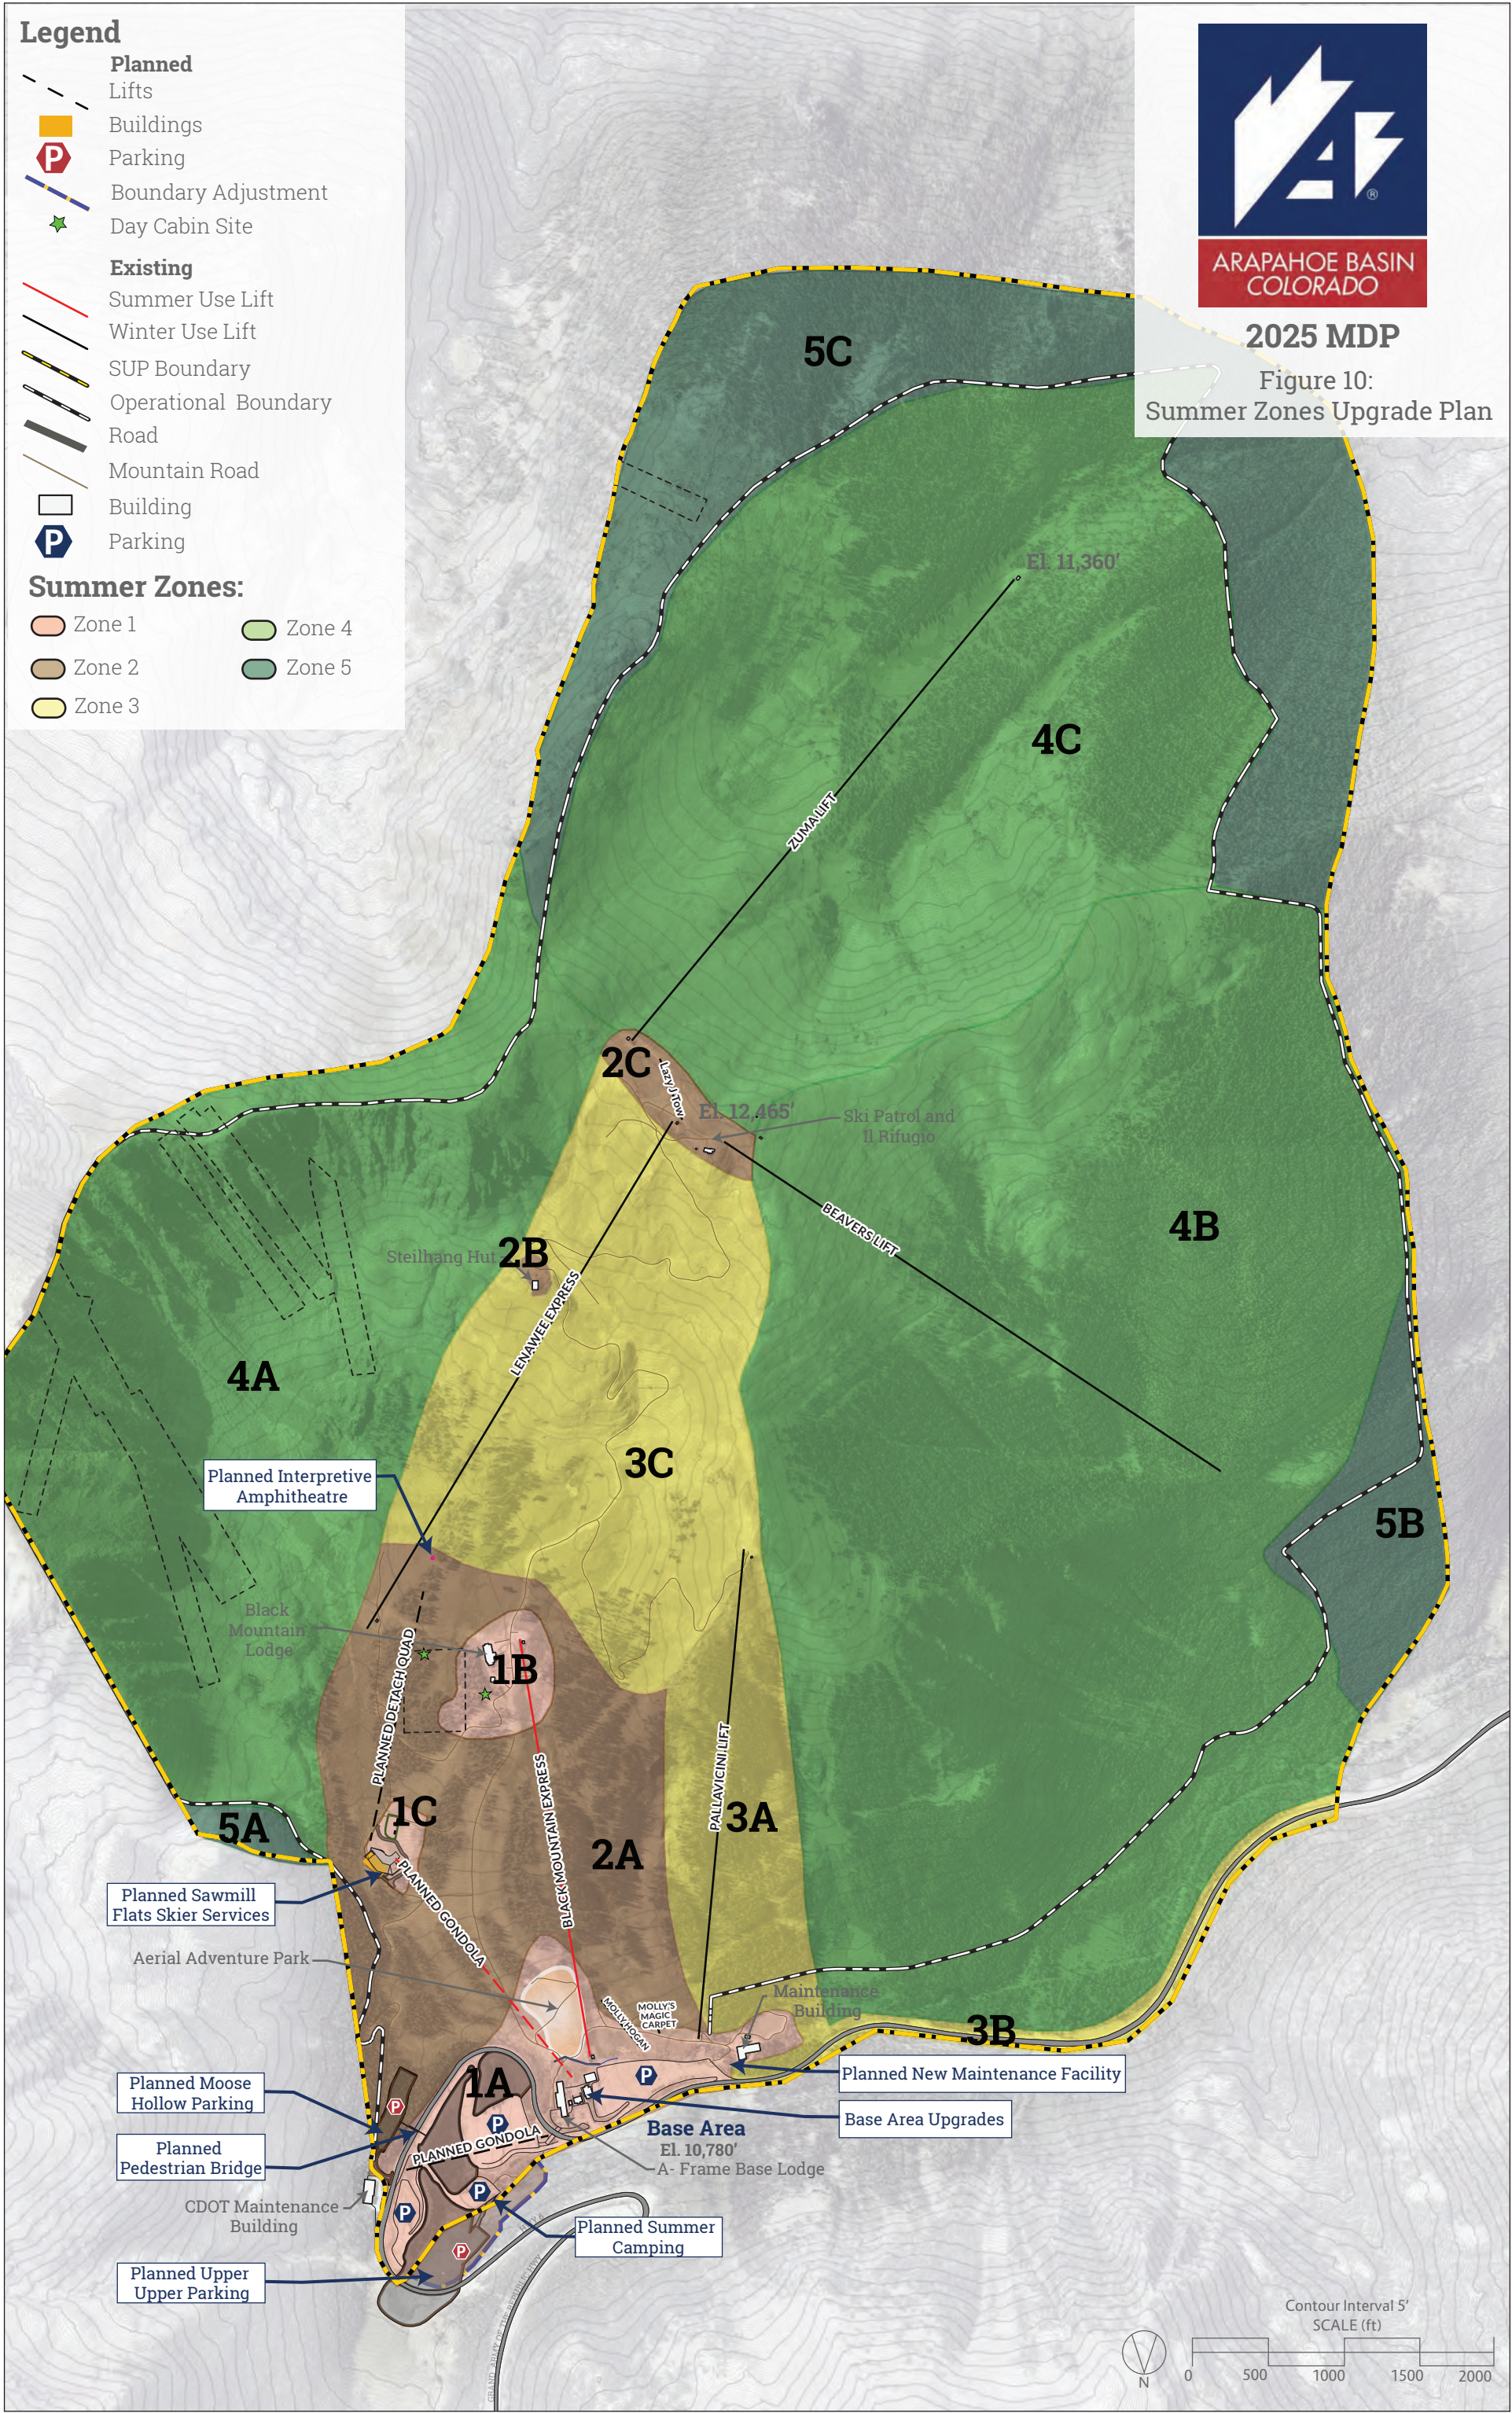





2025 MDP

Figure 11: Base Area Upgrade Plan

Legend


Planned

Lifts

Buildings

Parking

Existing

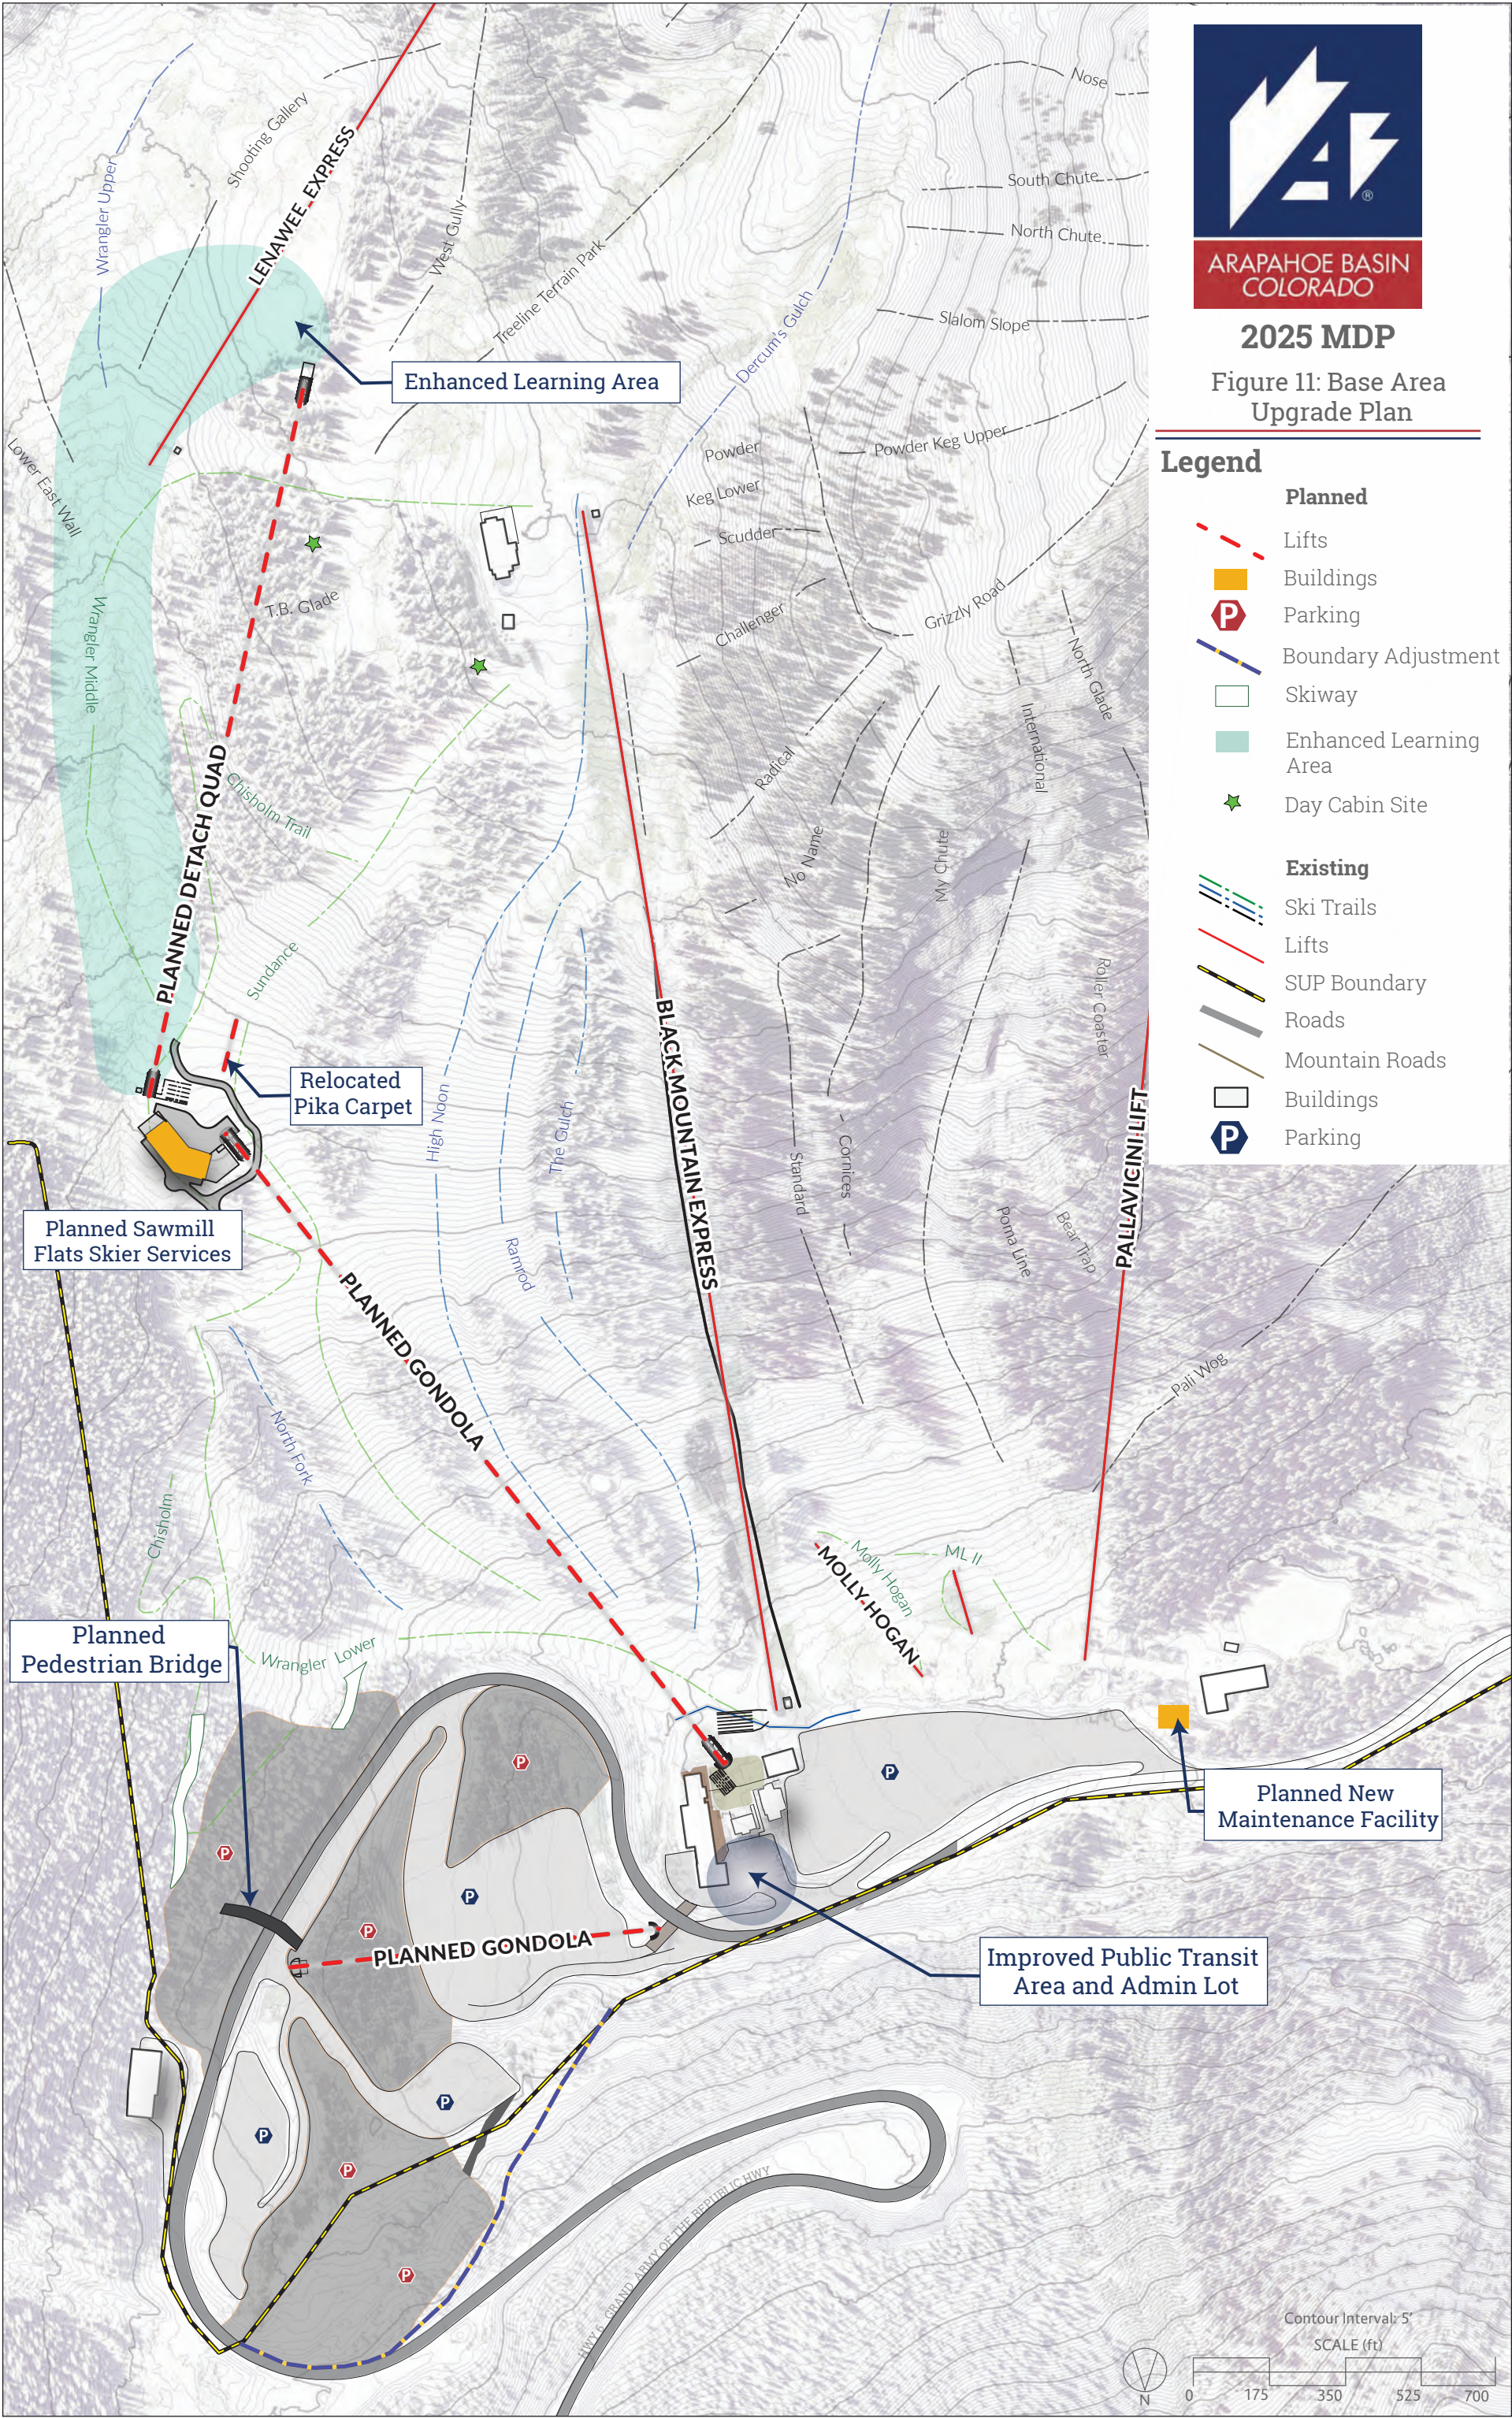



A

## Additional Tables





Table A-1. Terrain Specifications—Existing Conditions and Upgrade Plan

| Trail/Area Name        | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| 1-01L Wrangler Lower   | 11,162              | 10,841                 | 321                 | 2,083              | 133              | 6.4                | 16%            | 29%            | Novice                    |
| 1-01M Wrangler Upper   | 11,547              | 11,292                 | 255                 | 2,168              | 247              | 12.3               | 12%            | 27%            | Novice                    |
| 1-02 Chisholm Trail    | 11,427              | 11,167                 | 259                 | 2,349              | 31               | 1.7                | 11%            | 16%            | Novice                    |
| 1-03 Chisholm          | 11,132              | 11,003                 | 129                 | 1,492              | 41               | 1.4                | 9%             | 18%            | Novice                    |
| 1-04 North Fork        | 11,170              | 10,959                 | 211                 | 811                | 80               | 1.5                | 27%            | 36%            | Intermediate              |
| 1-05 Sundance          | 11,508              | 10,920                 | 587                 | 2,688              | 190              | 11.8               | 22%            | 33%            | Novice                    |
| 1-06 High Noon         | 11,552              | 10,901                 | 651                 | 2,842              | 201              | 13.1               | 24%            | 37%            | Intermediate              |
| 1-07 Ramrod            | 11,446              | 10,868                 | 578                 | 2,012              | 131              | 6.1                | 30%            | 41%            | Intermediate              |
| 1-08 The Gulch         | 11,436              | 11,176                 | 260                 | 812                | 70               | 1.3                | 34%            | 42%            | Advanced                  |
| 1-09 Exhibition        | 11,449              | 10,833                 | 616                 | 1,994              | 170              | 7.8                | 33%            | 62%            | Expert                    |
| 1-10 Terrain Park      | 11,530              | 11,469                 | 61                  | 382                | 111              | 1.0                | 16%            | 18%            | Novice                    |
| 1-11 Molly Hogan Upper | 10,977              | 10,798                 | 179                 | 864                | 236              | 4.7                | 21%            | 27%            | Low Intermediate          |
| 2-01 Cornice Run II    | 12,113              | 12,064                 | 49                  | 611                | 113              | 1.6                | 8%             | 18%            | Intermediate              |
| 2-02 Wildcat           | 12,067              | 11,810                 | 257                 | 659                | 301              | 4.5                | 43%            | 61%            | Expert                    |
| 2-03 Nose              | 12,100              | 11,753                 | 347                 | 750                | 268              | 4.6                | 53%            | 60%            | Expert                    |
| 2-04 South Chute       | 12,088              | 11,719                 | 369                 | 781                | 117              | 2.1                | 54%            | 73%            | Expert                    |
| 2-05 Slalom Slope      | 12,043              | 11,694                 | 349                 | 751                | 188              | 3.2                | 53%            | 61%            | Expert                    |
| 2-06 North Chute       | 12,106              | 11,702                 | 404                 | 829                | 189              | 3.6                | 56%            | 66%            | Expert                    |
| 2-07 Grizzly Road      | 12,108              | 11,684                 | 424                 | 1,844              | 83               | 3.5                | 24%            | 37%            | Intermediate              |
| 2-08 Radical           | 11,748              | 11,483                 | 265                 | 654                | 99               | 1.5                | 45%            | 57%            | Expert                    |

## APPENDIX A. ADDITIONAL TABLES

| Trail/Area Name          | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|--------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| 2-09 Standard            | 11,792              | 10,967                 | 825                 | 2,052              | 133              | 6.2                | 44%            | 71%            | Expert                    |
| 2-10 13 Cornices Upper   | 11,542              | 11,350                 | 192                 | 424                | 63               | 0.6                | 51%            | 66%            | Expert                    |
| 2-11 My Chute            | 11,758              | 11,451                 | 307                 | 596                | 115              | 1.6                | 60%            | 72%            | Expert                    |
| 2-12 International       | 11,849              | 10,889                 | 961                 | 2,216              | 214              | 10.9               | 48%            | 70%            | Expert                    |
| 2-13 North Glade         | 11,884              | 11,523                 | 361                 | 727                | 335              | 5.6                | 58%            | 70%            | Expert                    |
| 2-14 Bear Trap           | 11,208              | 10,882                 | 326                 | 748                | 160              | 2.7                | 49%            | 69%            | Expert                    |
| 2-15 Roller Coaster      | 11,773              | 11,040                 | 733                 | 1,746              | 220              | 8.8                | 47%            | 71%            | Expert                    |
| 2-16 Rock Garden         | 11,389              | 11,028                 | 361                 | 788                | 261              | 4.7                | 52%            | 70%            | Expert                    |
| 2-17 East Avenue         | 12,016              | 11,628                 | 388                 | 784                | 152              | 2.7                | 57%            | 64%            | Expert                    |
| 2-18 Pali Main Street    | 12,087              | 11,068                 | 1,019               | 2,187              | 214              | 10.7               | 53%            | 62%            | Expert                    |
| 2-19 The Spine           | 11,907              | 11,612                 | 295                 | 564                | 148              | 1.9                | 62%            | 69%            | Expert                    |
| 2-20 Pali Face           | 11,863              | 11,083                 | 780                 | 1,595              | 221              | 8.1                | 56%            | 74%            | Expert                    |
| 2-21 4th Alley           | 11,745              | 11,096                 | 649                 | 1,269              | 143              | 4.2                | 60%            | 91%            | Expert                    |
| 2-22 Pali Wog            | 11,128              | 10,848                 | 279                 | 2,036              | 51               | 2.4                | 14%            | 36%            | Advanced                  |
| 2-23 Pali Cornice        | 12,110              | 11,906                 | 204                 | 650                | 64               | 1.0                | 33%            | 43%            | Advanced                  |
| 4-01 Humbug              | 12,413              | 12,157                 | 256                 | 939                | 151              | 3.3                | 28%            | 44%            | Intermediate              |
| 4-02 Lenawee Face        | 12,435              | 12,134                 | 301                 | 1,165              | 422              | 11.3               | 27%            | 42%            | Low Intermediate          |
| 4-03 Powerline           | 12,459              | 12,023                 | 436                 | 1,330              | 113              | 3.5                | 35%            | 47%            | Intermediate              |
| 4-04 Norway Face         | 12,453              | 12,018                 | 435                 | 1,376              | 250              | 7.9                | 34%            | 50%            | Intermediate              |
| 4-05 Norway Mountain Run | 12,442              | 11,976                 | 466                 | 1,387              | 145              | 4.6                | 36%            | 50%            | Intermediate              |



## APPENDIX A. ADDITIONAL TABLES

| Trail/Area Name            | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|----------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| 4-06 Knolls                | 12,447              | 11,975                 | 472                 | 1,553              | 250              | 8.9                | 32%            | 52%            | Intermediate              |
| 4-07 King Cornice          | 12,284              | 11,955                 | 329                 | 888                | 282              | 5.8                | 41%            | 57%            | Advanced                  |
| 4-08 West Wall             | 12,111              | 11,923                 | 188                 | 372                | 595              | 5.1                | 59%            | 63%            | Advanced                  |
| 4-09 Cornice Run           | 12,453              | 12,070                 | 383                 | 2,100              | 90               | 4.4                | 19%            | 34%            | Intermediate              |
| 4-10 Dercum's Gulch        | 12,127              | 11,539                 | 588                 | 3,401              | 296              | 23.1               | 18%            | 38%            | Intermediate              |
| 4-11 Falcon                | 12,111              | 11,760                 | 350                 | 1,058              | 78               | 1.9                | 36%            | 57%            | Expert                    |
| 4-12 Dragon                | 12,106              | 11,574                 | 532                 | 1,551              | 134              | 4.8                | 37%            | 58%            | Expert                    |
| 4-13 West Gully            | 12,109              | 11,531                 | 578                 | 2,261              | 131              | 6.8                | 27%            | 52%            | Advanced                  |
| 4-14 Lenawee Parks         | 12,101              | 11,709                 | 392                 | 1,242              | 363              | 10.4               | 34%            | 56%            | Expert                    |
| 4-15 Gentry                | 12,017              | 11,736                 | 279                 | 1,053              | 319              | 7.7                | 29%            | 70%            | Expert                    |
| 4-16 Jamie's Face          | 11,954              | 11,808                 | 142                 | 476                | 286              | 3.1                | 36%            | 54%            | Advanced                  |
| 4-17 East Gully            | 11,770              | 11,524                 | 238                 | 797                | 82               | 1.5                | 32%            | 47%            | Advanced                  |
| 4-18 Treeline Terrain Park | 11,798              | 11,512                 | 285                 | 2,023              | 164              | 7.6                | 14%            | 39%            | Advanced                  |
| 4-19 Shooting Gallery      | 11,614              | 11,456                 | 158                 | 1,121              | 453              | 11.7               | 14%            | 42%            | Intermediate              |
| 5-01 Molly Hogan 1         | 10,870              | 10,813                 | 57                  | 430                | 205              | 2.0                | 13%            | 20%            | Novice                    |
| 5-02 Molly Hogan 2         | 10,852              | 10,795                 | 57                  | 464                | 95               | 1.0                | 12%            | 20%            | Novice                    |
| 6-01 Molly's Magic Carpet  | 10,837              | 10,809                 | 28                  | 168                | 133              | 0.5                | 17%            | 17%            | Beginner                  |
| 7-01 End Zone              | 12,160              | 11,597                 | 563                 | 1,475              | 408              | 13.8               | 42%            | 69%            | Expert                    |
| 7-02 Jump                  | 12,252              | 11,711                 | 541                 | 1,357              | 619              | 19.3               | 44%            | 69%            | Expert                    |
| 7-03 Schaffler             | 12,256              | 11,740                 | 516                 | 1,211              | 286              | 7.9                | 48%            | 75%            | Expert                    |
| 7-04 Durrance              | 12,248              | 11,810                 | 438                 | 911                | 294              | 6.2                | 55%            | 76%            | Expert                    |

## APPENDIX A. ADDITIONAL TABLES

| Trail/Area Name             | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|-----------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| 7-05 Groswold               | 12,309              | 11,836                 | 474                 | 986                | 367              | 8.3                | 55%            | 76%            | Expert                    |
| 7-06 Max                    | 12,407              | 12,042                 | 365                 | 730                | 327              | 5.5                | 58%            | 74%            | Expert                    |
| 7-07 Long Chute             | 12,507              | 11,808                 | 699                 | 1,722              | 173              | 6.9                | 45%            | 56%            | Advanced                  |
| 7-08 Black Bear             | 12,480              | 11,853                 | 627                 | 1,623              | 367              | 13.7               | 42%            | 57%            | Expert                    |
| 7-09 Larkspur               | 12,467              | 11,459                 | 1,009               | 4,571              | 227              | 23.8               | 23%            | 56%            | Advanced                  |
| 7-10 Independence           | 11,830              | 11,552                 | 278                 | 1,138              | 110              | 2.9                | 25%            | 48%            | Advanced                  |
| 7-11 Shining Light          | 12,054              | 11,673                 | 381                 | 1,360              | 343              | 10.7               | 29%            | 45%            | Advanced                  |
| 7-12 Columbine              | 12,448              | 11,357                 | 1,092               | 4,598              | 458              | 48.4               | 25%            | 48%            | Advanced                  |
| 7-13 Northern Spy           | 12,458              | 12,088                 | 369                 | 1,111              | 385              | 9.8                | 35%            | 47%            | Advanced                  |
| 7-14 Mountain Goat Traverse | 12,471              | 11,818                 | 653                 | 4,323              | 158              | 15.6               | 15%            | 34%            | Advanced                  |
| 7-15 Tieze's Claim          | 12,063              | 11,715                 | 348                 | 776                | 916              | 16.3               | 50%            | 63%            | Expert                    |
| 7-16 Elk Meadows            | 11,925              | 11,645                 | 281                 | 1,046              | 477              | 11.5               | 28%            | 35%            | Advanced                  |
| 7-17 Ned's Cache            | 12,062              | 11,807                 | 254                 | 862                | 170              | 3.4                | 31%            | 42%            | Advanced                  |
| B-1 Alex                    | 11,825              | 11,294                 | 532                 | 1,231              | 105              | 3.0                | 48%            | 61%            | Expert                    |
| B-2 Bailey Bros.            | 11,445              | 11,089                 | 355                 | 748                | 57               | 1.0                | 54%            | 68%            | Expert                    |
| B-3 Beaver Bowl             | 12,183              | 11,585                 | 598                 | 1,696              | 185              | 7.2                | 38%            | 63%            | Expert                    |
| B-4 Bighorn                 | 11,944              | 11,275                 | 669                 | 1,799              | 103              | 4.3                | 40%            | 57%            | Expert                    |
| B-5 Castor                  | 12,037              | 11,004                 | 1,032               | 2,624              | 124              | 7.5                | 43%            | 62%            | Expert                    |
| B-6 Davis                   | 12,061              | 10,964                 | 1,097               | 4,218              | 84               | 8.2                | 27%            | 55%            | Intermediate              |
| B-7 Digger                  | 11,917              | 11,414                 | 503                 | 1,286              | 130              | 3.8                | 43%            | 53%            | Expert                    |
| B-8 Dreamcatcher            | 11,832              | 11,300                 | 532                 | 1,639              | 142              | 5.4                | 35%            | 56%            | Advanced                  |
| B-9 Drummond                | 11,405              | 11,070                 | 335                 | 791                | 96               | 1.7                | 47%            | 65%            | Expert                    |



## APPENDIX A. ADDITIONAL TABLES

| Trail/Area Name         | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|-------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| B-10 Eastwoods          | 12,088              | 11,454                 | 634                 | 1,362              | 77               | 2.4                | 53%            | 62%            | Expert                    |
| B-11 Face Shot Gully    | 12,058              | 11,003                 | 1,054               | 2,891              | 49               | 3.2                | 40%            | 60%            | Expert                    |
| B-12 Faculty Club       | 11,487              | 11,175                 | 313                 | 610                | 56               | 0.8                | 60%            | 68%            | Expert                    |
| B-13 Glockenspiel Glade | 11,630              | 11,159                 | 471                 | 1,262              | 203              | 5.9                | 40%            | 53%            | Advanced                  |
| B-14 Hauk               | 11,147              | 11,010                 | 137                 | 312                | 133              | 1.0                | 49%            | 52%            | Advanced                  |
| B-15 Jaeger             | 11,678              | 10,988                 | 690                 | 1,790              | 101              | 4.2                | 42%            | 58%            | Expert                    |
| B-16 Jetta              | 11,746              | 11,145                 | 601                 | 1,524              | 147              | 5.1                | 43%            | 65%            | Expert                    |
| B-17 Loafer             | 12,446              | 10,965                 | 1,481               | 5,640              | 93               | 12.0               | 27%            | 52%            | Intermediate              |
| B-18 Marmot             | 12,360              | 11,693                 | 667                 | 1,851              | 188              | 8.0                | 39%            | 52%            | Advanced                  |
| B-19 Peaceful Valley    | 12,033              | 11,408                 | 625                 | 2,911              | 43               | 2.9                | 22%            | 39%            | Expert                    |
| B-20 Pioneer Willy      | 11,510              | 11,124                 | 386                 | 938                | 212              | 4.6                | 45%            | 65%            | Expert                    |
| B-21 Porcupine          | 11,637              | 11,005                 | 632                 | 1,563              | 64               | 2.3                | 45%            | 71%            | Expert                    |
| B-22 Ptarmigan          | 12,416              | 11,791                 | 624                 | 1,751              | 264              | 10.6               | 38%            | 50%            | Advanced                  |
| B-24 The Last Waltz     | 11,396              | 10,991                 | 405                 | 3,637              | 32               | 2.7                | 11%            | 30%            | Low Intermediate          |
| B-25 Thick & Thin       | 11,900              | 11,275                 | 625                 | 1,253              | 80               | 2.3                | 58%            | 67%            | Expert                    |
| B-26 Tinker Toy         | 11,720              | 11,326                 | 394                 | 1,240              | 203              | 5.8                | 34%            | 51%            | Expert                    |
| B-27 Todd's Ridge       | 11,907              | 11,178                 | 729                 | 2,322              | 116              | 6.2                | 33%            | 47%            | Advanced                  |
| G-01 T.B. Glade         | 11,512              | 11,416                 | 96                  | 677                | 701              | 10.9               | 14%            | 19%            | Advanced                  |
| G-02 Powder Keg Upper   | 11,982              | 11,719                 | 262                 | 745                | 425              | 7.3                | 38%            | 49%            | Advanced                  |
| G-03 Powder Keg Lower   | 11,687              | 11,617                 | 71                  | 190                | 385              | 1.7                | 40%            | 42%            | Advanced                  |

## APPENDIX A. ADDITIONAL TABLES

| Trail/Area Name        | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| G-05 Challenger        | 11,721              | 11,538                 | 183                 | 450                | 276              | 2.9                | 45%            | 58%            | Expert                    |
| G-06 No Name           | 11,718              | 11,459                 | 258                 | 708                | 155              | 2.5                | 39%            | 58%            | Expert                    |
| G-07 13 Cornices Lower | 11,325              | 11,115                 | 210                 | 390                | 138              | 1.2                | 64%            | 70%            | Expert                    |
| G-08 Bear Trap         | 11,176              | 10,861                 | 316                 | 765                | 170              | 3.0                | 46%            | 63%            | Expert                    |
| G-09 Turbo             | 11,437              | 10,992                 | 445                 | 910                | 94               | 2.0                | 57%            | 93%            | Expert                    |
| G-18 Lynx Lane         | 11,510              | 11,480                 | 30                  | 275                | 56               | 0.4                | 11%            | 16%            | Novice                    |
| G-10 West Turbo        | 11,544              | 10,999                 | 545                 | 1,096              | 82               | 2.1                | 58%            | 95%            | Expert                    |
| G-11 Timber Glades     | 11,688              | 11,403                 | 285                 | 585                | 550              | 7.4                | 56%            | 67%            | Expert                    |
| G-12 David's Run       | 11,713              | 11,415                 | 298                 | 545                | 145              | 1.8                | 66%            | 69%            | Expert                    |
| G-13 2nd Alley         | 11,794              | 11,398                 | 396                 | 812                | 336              | 6.3                | 56%            | 66%            | Expert                    |
| G-14 3rd Alley         | 11,576              | 11,135                 | 442                 | 839                | 336              | 6.5                | 62%            | 77%            | Expert                    |
| G-14 Scudder           | 11,708              | 11,565                 | 143                 | 331                | 238              | 1.8                | 48%            | 57%            | Expert                    |
| G-15 Gauthier          | 11,697              | 11,112                 | 586                 | 1,102              | 157              | 4.0                | 64%            | 81%            | Expert                    |
| G-16 Cabin Glades      | 11,746              | 11,536                 | 210                 | 614                | 157              | 2.2                | 37%            | 45%            | Advanced                  |
| G-17 Half Moon Glades  | 11,852              | 11,576                 | 276                 | 674                | 360              | 5.6                | 45%            | 64%            | Expert                    |
| Zuma Cornice           | 12,398              | 12,099                 | 299                 | 2,631              | 42               | 2.6                | 12%            | 34%            | Low Intermediate          |
| X-1-East Wall Traverse | 12,172              | 11,894                 | 238                 | 3,958              | 10               | 0.9                | 6%             | 46%            | Advanced                  |
| X-2 Land of Giants     | 12,045              | 11,528                 | 517                 | 1,584              | 928              | 33.7               | 35%            | 62%            | Expert                    |
| X-3 Lower East Wall    | 11,889              | 11,432                 | 458                 | 1,695              | 750              | 29.2               | 28%            | 46%            | Advanced                  |
| ZG-03 Winning Card     | 11,921              | 11,530                 | 391                 | 1,254              | 354              | 10.2               | 33%            | 46%            | Advanced                  |



## APPENDIX A. ADDITIONAL TABLES

| Trail/Area Name          | Top Elevation (ft.) | Bottom Elevation (ft.) | Vertical Drop (ft.) | Slope Length (ft.) | Avg. Width (ft.) | Slope Area (acres) | Avg. Grade (%) | Max. Grade (%) | Skier/Rider Ability Level |
|--------------------------|---------------------|------------------------|---------------------|--------------------|------------------|--------------------|----------------|----------------|---------------------------|
| ZG-05 Eureka             | 11,544              | 11,371                 | 163                 | 543                | 789              | 9.8                | 32%            | 45%            | Advanced                  |
| ZG-06 Miner's Glade      | 11,819              | 11,490                 | 329                 | 1,436              | 446              | 14.7               | 24%            | 46%            | Advanced                  |
| ZG-07 Log Roll           | 11,851              | 11,574                 | 276                 | 627                | 372              | 5.4                | 50%            | 71%            | Expert                    |
| ZG-08 Placer Junction    | 11,699              | 11,551                 | 148                 | 338                | 330              | 2.6                | 49%            | 60%            | Expert                    |
| ZG-09 Torreys            | 11,649              | 11,378                 | 271                 | 994                | 335              | 7.6                | 29%            | 53%            | Advanced                  |
| ZH-07 Gray's             | 11,815              | 11,498                 | 317                 | 1,202              | 588              | 16.2               | 27%            | 36%            | Intermediate              |
| ZH-08 Bierstadt          | 11,858              | 11,641                 | 217                 | 998                | 703              | 16.1               | 22%            | 33%            | Low Intermediate          |
| ZH-09 Lightning Traverse | 11,819              | 11,340                 | 479                 | 1,556              | 103              | 3.7                | 33%            | 58%            | Expert                    |
| 1-12 Pika Place          | 10,845              | 10,841                 | 4                   | 73                 | 70               | 0.1                | 5%             | 5%             | Beginner                  |
| Lazy J Connector         | 12,471              | 12,458                 | 13                  | 314                | 34               | 0.2                | 4%             | 5%             | Intermediate              |
| <b>EXISTING TOTAL</b>    |                     |                        |                     | <b>182,516</b>     |                  | <b>870.73</b>      |                |                |                           |
| Sawmill Flats Carpet     | 11,287              | 11,270                 | 17                  | 150                | 65               | 0.2                | 11%            | 12%            | Beginner                  |
| Lazy J Connector         | 12,471              | 12,458                 | 13                  | 314                | 34               | 0.2                | 4%             | 5%             | Intermediate              |
| <b>UPGRADE TOTAL</b>     |                     |                        |                     | <b>182,592</b>     |                  | <b>870.85</b>      |                |                |                           |

Table A-2. Space Use Recommendations—Base Area—Existing Conditions

| Service Function            | Existing Total | Recommended Range |               |
|-----------------------------|----------------|-------------------|---------------|
|                             |                | Low               | High          |
| Ticket Sales/Guest Services | 1,195          | 930               | 1,130         |
| Public Lockers              | 723            | 2,780             | 3,400         |
| Rentals/Repair              | 2,956          | 5,560             | 6,800         |
| Retail Sales                | 2,180          | 1,890             | 2,310         |
| Bar/lounge                  | 3,067          | 2,840             | 3,470         |
| Adult Ski School            | 1,548          | 1,480             | 1,810         |
| Kid's Ski School            | 1,817          | 2,970             | 3,630         |
| Restaurant Seating          | 3,681          | 8,667             | 10,112        |
| Kitchen/Scramble            | 4,938          | 4,334             | 5,056         |
| Rest rooms                  | 2,252          | 1,480             | 1,810         |
| Ski Patrol                  | 1,595          | 910               | 1,110         |
| Administration              | 4,514          | 3,890             | 4,760         |
| Employee Lockers/Lounge     | 2,337          | 1,560             | 1,900         |
| Mechanical                  | 1,300          | 1,060             | 1,560         |
| Storage                     | 550            | 1,770             | 2,600         |
| Circulation/Waste           | 1,232          | 4,240             | 6,240         |
| <b>TOTAL SQUARE FEET</b>    | <b>35,885</b>  | <b>46,361</b>     | <b>57,698</b> |

Source: SE Group



Table A-3. Space Use Recommendations—Black Mountain Lodge—Existing Conditions

| Service Function            | Existing Total | Recommended Range |               |
|-----------------------------|----------------|-------------------|---------------|
|                             |                | Low               | High          |
| Ticket Sales/Guest Services |                | -                 | -             |
| Public Lockers              | -              | -                 | -             |
| Rentals/Repair              | -              | -                 | -             |
| Retail Sales                | -              | -                 | -             |
| Bar/lounge                  | -              | -                 | -             |
| Adult Ski School            | -              | -                 | -             |
| Kid's Ski School            | -              | -                 | -             |
| Restaurant Seating          | 3,849          | 4,560             | 5,320         |
| Kitchen/Scramble            | 1,565          | 2,280             | 2,660         |
| Rest rooms                  | 822            | 780               | 950           |
| Ski Patrol                  | -              | 480               | 590           |
| Administration              | -              | -                 | -             |
| Employee Lockers/Lounge     | -              | -                 | -             |
| Mechanical                  | 543            | 220               | 310           |
| Storage                     | 907            | 360               | 520           |
| Circulation/Waste           | -              | 870               | 1,260         |
| <b>TOTAL SQUARE FEET</b>    | <b>7,686</b>   | <b>9,550</b>      | <b>11,610</b> |

Source: SE Group

**Table A-4. Space Use Recommendations—Steilhang Hut—Existing Conditions**

| Service Function            | Existing Total | Recommended Range |              |
|-----------------------------|----------------|-------------------|--------------|
|                             |                | Low               | High         |
| Ticket Sales/Guest Services | -              | -                 | -            |
| Public Lockers              | -              | -                 | -            |
| Rentals/Repair              | -              | -                 | -            |
| Retail Sales                | -              | -                 | -            |
| Bar/lounge                  | -              | -                 | -            |
| Adult Ski School            | -              | -                 | -            |
| Kid's Ski School            | -              | -                 | -            |
| Restaurant Seating          | 556            | 590               | 689          |
| Kitchen/Scramble            | 270            | 295               | 344          |
| Rest rooms                  | 109            | 120               | 140          |
| Ski Patrol                  | -              | 70                | 90           |
| Administration              | -              | -                 | -            |
| Employee Lockers/Lounge     | -              | -                 | -            |
| Mechanical                  | 458            | 30                | 40           |
| Storage                     | 615            | 50                | 70           |
| Circulation/Waste           | 160            | 120               | 170          |
| <b>TOTAL SQUARE FEET</b>    | <b>2,168</b>   | <b>1,276</b>      | <b>1,543</b> |

Source: SE Group



Table A-5. Space Use Recommendations—Il Rifugio—Existing Conditions

| Service Function            | Existing Total | Recommended Range |              |
|-----------------------------|----------------|-------------------|--------------|
|                             |                | Low               | High         |
| Ticket Sales/Guest Services | -              | -                 | -            |
| Public Lockers              | -              | -                 | -            |
| Rentals/Repair              | -              | -                 | -            |
| Retail Sales                | -              | -                 | -            |
| Bar/lounge                  | -              | -                 | -            |
| Adult Ski School            | -              | -                 | -            |
| Kid's Ski School            | -              | -                 | -            |
| Restaurant Seating          | 800            | 787               | 886          |
| Kitchen/Scramble            | 140            | 394               | 443          |
| Rest rooms                  | 106            | 90                | 110          |
| Ski Patrol                  | 1,233          | 50                | 60           |
| Administration              | -              | -                 | -            |
| Employee Lockers/Lounge     | -              | -                 | -            |
| Mechanical                  | 250            | 40                | 50           |
| Storage                     | 688            | 60                | 80           |
| Circulation/                | 348            | 140               | 200          |
| <b>TOTAL SQUARE FEET</b>    | <b>3,565</b>   | <b>1,561</b>      | <b>1,828</b> |

Source: SE Group

Table A-6. Space Use Recommendations—Base Area—Upgrade Plan

| Service Function            | Existing Total | Recommended Range |               |
|-----------------------------|----------------|-------------------|---------------|
|                             |                | Low               | High          |
| Ticket Sales/Guest Services | 1,195          | 1,090             | 1,330         |
| Public Lockers              | 723            | 3,270             | 3,990         |
| Rentals/Repair              | 2,956          | 6,530             | 7,990         |
| Retail Sales                | 2,180          | 2,220             | 2,720         |
| Bar/lounge                  | 3,067          | 3,330             | 4,070         |
| Adult Ski School            | 1,548          | 350               | 430           |
| Kid's Ski School            | 1,817          | 700               | 850           |
| Restaurant Seating          | 3,681          | 8,638             | 10,077        |
| Kitchen/Scramble            | 4,938          | 4,319             | 5,039         |
| Rest rooms                  | 2,252          | 1,470             | 1,800         |
| Ski Patrol                  | 1,595          | 910               | 1,110         |
| Administration              | 4,514          | 3,200             | 3,910         |
| Employee Lockers/Lounge     | 2,337          | 1,280             | 1,570         |
| Mechanical                  | 1,300          | 1,010             | 1,480         |
| Storage                     | 550            | 1,680             | 2,470         |
| Circulation/Waste           | 1,232          | 4,030             | 5,920         |
| <b>TOTAL SQUARE FEET</b>    | <b>35,885</b>  | <b>44,026</b>     | <b>54,756</b> |

Source: SE Group



Table A-7. Space Use Recommendations—Black Mountain Lodge—Upgrade Plan

| Service Function            | Existing Total | Recommended Range |              |
|-----------------------------|----------------|-------------------|--------------|
|                             |                | Low               | High         |
| Ticket Sales/Guest Services | -              | -                 | -            |
| Public Lockers              | -              | -                 | -            |
| Rentals/Repair              | -              | -                 | -            |
| Retail Sales                | -              | -                 | -            |
| Bar/lounge                  | -              | -                 | -            |
| Adult Ski School            | -              | -                 | -            |
| Kid's Ski School            | -              | -                 | -            |
| Restaurant Seating          | 3,849          | 3,098             | 3,614        |
| Kitchen/Scramble            | 1,565          | 1,549             | 1,807        |
| Rest rooms                  | 822            | 530               | 650          |
| Ski Patrol                  | -              | 330               | 400          |
| Administration              | -              | -                 | -            |
| Employee Lockers/Lounge     | -              | -                 | -            |
| Mechanical                  | 543            | 150               | 210          |
| Storage                     | 907            | 250               | 360          |
| Circulation/Waste           | -              | 590               | 850          |
| <b>TOTAL SQUARE FEET</b>    | <b>7,686</b>   | <b>6,497</b>      | <b>7,891</b> |

Source: SE Group

Table A-8. Space Use Recommendations—Steilhang Hut—Upgrade Plan

| Service Function            | Existing Total | Recommended Range |              |
|-----------------------------|----------------|-------------------|--------------|
|                             |                | Low               | High         |
| Ticket Sales/Guest Services | -              | -                 | -            |
| Public Lockers              | -              | -                 | -            |
| Rentals/Repair              | -              | -                 | -            |
| Retail Sales                | -              | -                 | -            |
| Bar/lounge                  | -              | -                 | -            |
| Adult Ski School            | -              | -                 | -            |
| Kid's Ski School            | -              | -                 | -            |
| Restaurant Seating          | 556            | 590               | 689          |
| Kitchen/Scramble            | 270            | 295               | 344          |
| Rest rooms                  | 109            | 120               | 140          |
| Ski Patrol                  | -              | 70                | 90           |
| Administration              | -              | -                 | -            |
| Employee Lockers/Lounge     | -              | -                 | -            |
| Mechanical                  | 458            | 30                | 40           |
| Storage                     | 615            | 50                | 70           |
| Circulation/Waste           | 160            | 120               | 170          |
| <b>TOTAL SQUARE FEET</b>    | <b>2,168</b>   | <b>1,276</b>      | <b>1,543</b> |

Source: SE Group

Table A-9. Space Use Recommendations—II Rifugio—Upgrade Plan

| Service Function            | Existing Total | Recommended Range |       |
|-----------------------------|----------------|-------------------|-------|
|                             |                | Low               | High  |
| Ticket Sales/Guest Services | -              | -                 | -     |
| Public Lockers              | -              | -                 | -     |
| Rentals/Repair              | -              | -                 | -     |
| Retail Sales                | -              | -                 | -     |
| Bar/lounge                  | -              | -                 | -     |
| Adult Ski School            | -              | -                 | -     |
| Kid's Ski School            | -              | -                 | -     |
| Restaurant Seating          | 800            | 918               | 1,033 |
| Kitchen/Scramble            | 140            | 459               | 517   |
| Rest rooms                  | 106            | 100               | 120   |
| Ski Patrol                  | 1,233          | 60                | 80    |
| Administration              | -              | -                 | -     |
| Employee Lockers/Lounge     | -              | -                 | -     |
| Mechanical                  | 250            | 40                | 60    |
| Storage                     | 688            | 70                | 100   |
| Circulation/Waste           | 348            | 170               | 230   |
| TOTAL SQUARE FEET           | 3,565          | 1,818             | 2,140 |

Source: SE Group




Table A-10. Space Use Recommendations—Sawmill Flats—Upgrade Plan

| Service Function            | Recommended Range |               |
|-----------------------------|-------------------|---------------|
|                             | Low               | High          |
| Ticket Sales/Guest Services | -                 | -             |
| Public Lockers              | -                 | -             |
| Rentals/Repair              | -                 | -             |
| Retail Sales                | -                 | -             |
| Bar/lounge                  | -                 | -             |
| Adult Ski School            | 1,390             | 1,700         |
| Kid's Ski School            | 2,790             | 3,410         |
| Restaurant Seating          | 3,926             | 4,580         |
| Kitchen/Scramble            | 1,963             | 2,290         |
| Rest rooms                  | 670               | 820           |
| Ski Patrol                  | 410               | 500           |
| Administration              | 1,370             | 1,680         |
| Employee Lockers/Lounge     | 550               | 670           |
| Mechanical                  | 350               | 520           |
| Storage                     | 590               | 860           |
| Circulation/Waste           | 1,410             | 2,070         |
| <b>TOTAL SQUARE FEET</b>    | <b>15,419</b>     | <b>19,100</b> |



B

## Summer Zones

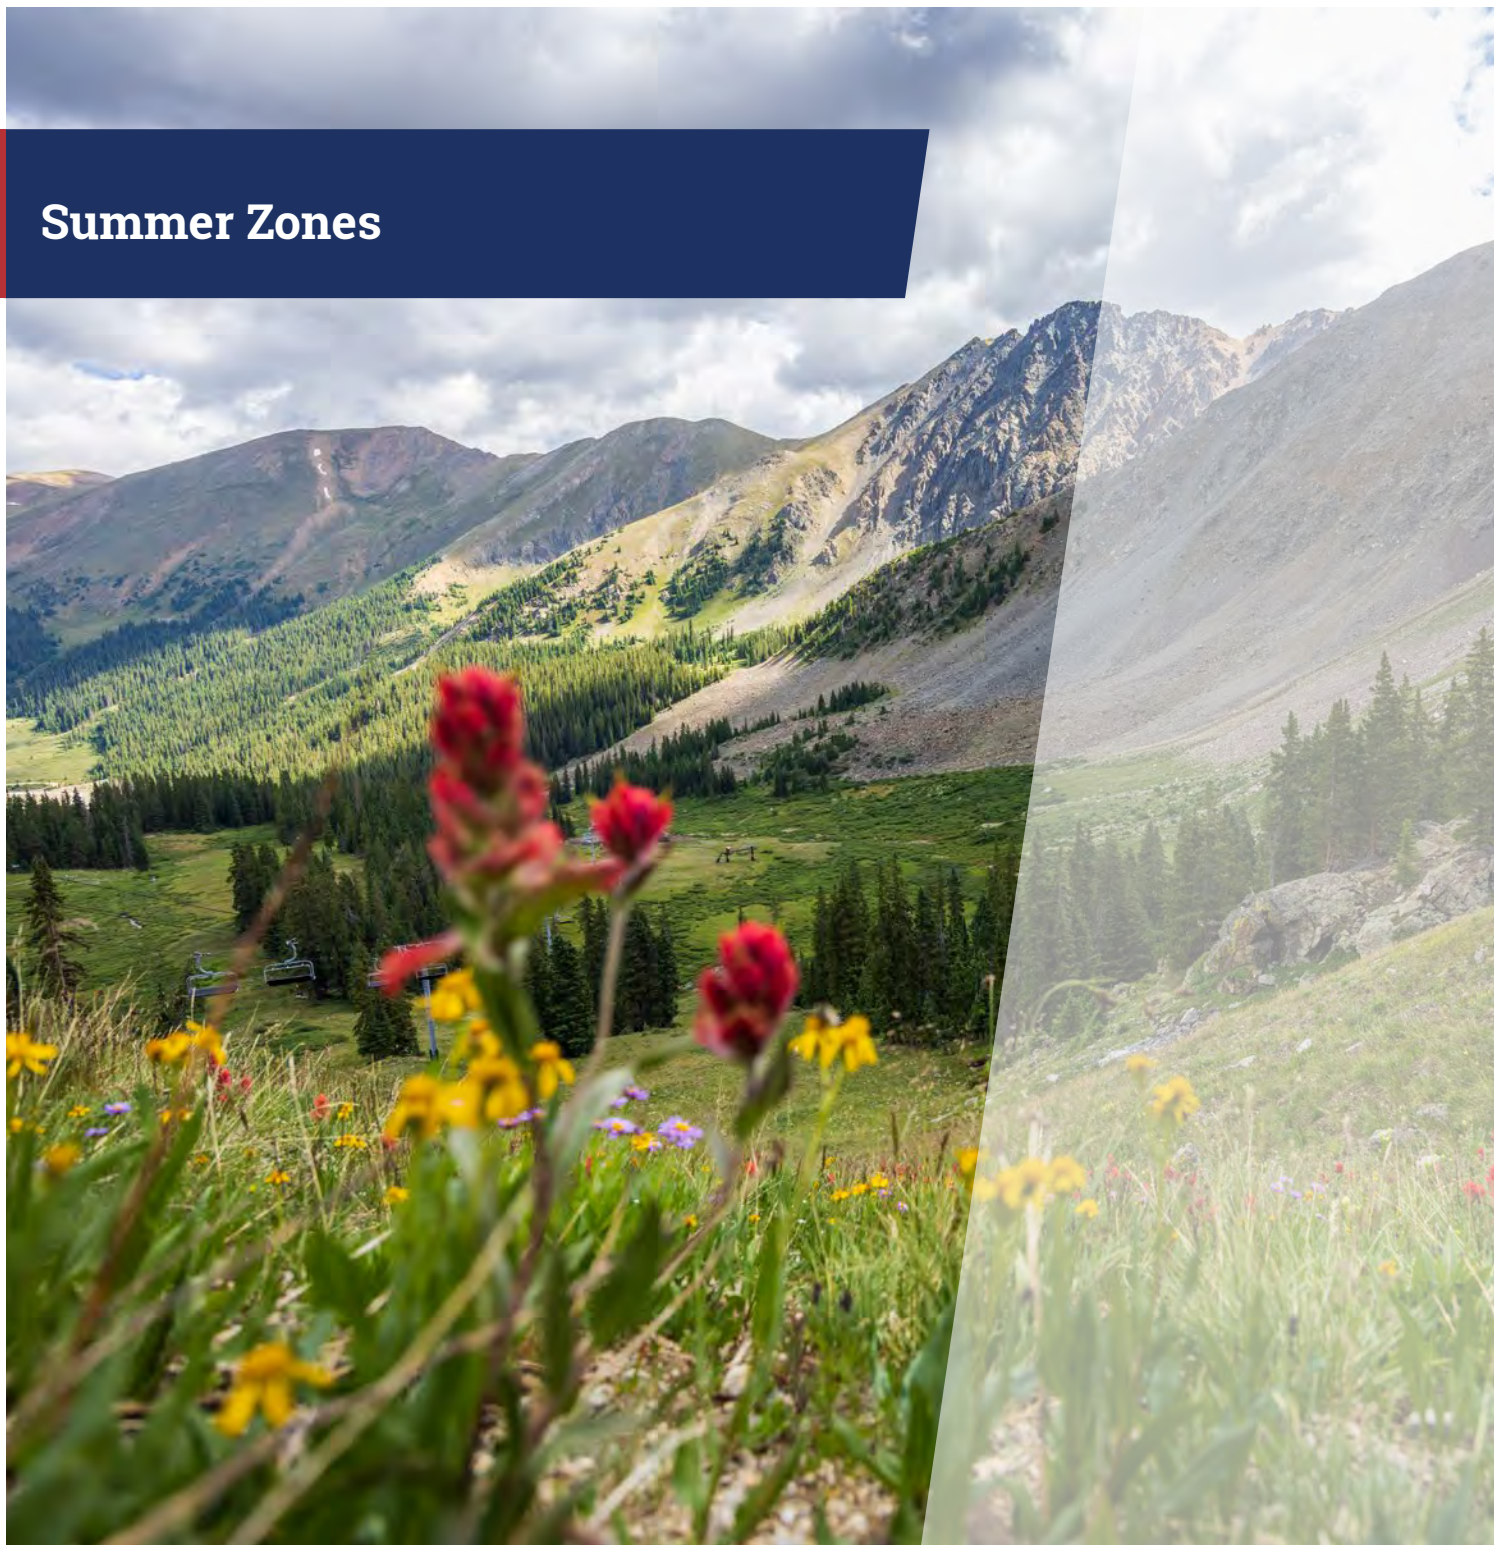



Summer zoning designations were created in the 2016 Addendum to the 2012 MDP. Through the planning process, five distinct zones have been identified within the A-Basin special use permit (SUP) area. These zones consider several characteristics similar to the ROS, including:

- Access – the number and function of roads within the area
- Remoteness – how far removed an individual feels from human activity
- Naturalness – the extent and intensity of development and disturbance within the area
- Infrastructure – the amount of and proximity to the built environment

Each of these characteristics is to be considered within the context of A-Basin as a developed ski area. Existing summer recreation and maintenance occurs throughout developed portions of the ski area; therefore, no area within the developed ski area is off limits to administrative access and maintenance.

The first step in the zone designation process was a careful consideration of the setting and the proximity to infrastructure supporting snow sports. Features such as watershed, topography, vegetation structure, level of existing disturbance, and existing infrastructure, as well as past NEPA approval requirements were considered in establishing area boundaries across the entire SUP area. The exercise resulted in the creation of fourteen areas unique in their location and/or features.

The second step of the zone designation process was applying a score for each characteristic on a scale of 1 to 3, with 1 being the most disturbed and 3 being the least disturbed. The Summer Zones figure illustrates the zone designations within the A-Basin's SUP area. Table 1 describes the characteristics of each zone, and Table 2 provides information about each zone at A-Basin. These tables are found on pages 10 and 11 of this report.

Because summer and multi-season uses are continually being developed and activities that do not currently exist may be popular within the next several years, a list of compatible activities is provided for each zone. The intent of the list of compatible activities is to allow for a certain amount of flexibility, since it is impossible to foresee exactly what new activities will be developed over this time. A-Basin will continue to work with the Forest Service to ensure that proposed summer and multi-season activities are suitable for the setting and desired experience within each zone.

### a) Zone 1

#### **Setting**

The existing setting of Zone 1 is highly developed and disturbed. Within Zone 1, the built environment dominates the landscape. Within the context of the overall SUP area, the following summarizes the setting in Zone 1:

- Road access and roads are prevalent, including parking and transportation hub;
- Considerable human activity (people recreation and/or resort operations) occur within and proximate to this setting—there is little to no feeling of remoteness;
- Terrain modifications (ground disturbance and vegetation removal) dominate the area; and
- Infrastructure, including chairlifts and buildings, are present.

Two areas were designated as Zone 1: Areas 8 and 10. These areas comprise the parking lot, base area, and Black Mountain Lodge.

### **Desired Experience**

Within Zone 1, guests are expected to encounter a high concentration of other guests and feel completely safe within their surroundings. The level of development will reflect the current setting and function of these areas as hubs of activity and portals to other activities across the ski area. Most guests visiting Zone 1 will initially access it from Highway 6 and the parking lot area. Guests will also access Area 10 via the Black Mountain Express or hiking and mountain biking trails. Within Zone 1, the concepts identified in the Forest Service's Built Environment Image Guide (BEIG) will be followed to ensure appropriate design guidelines for both landscape architecture and built architecture are followed. Zone 1 abuts Zone 2 on the fringes of developed on-mountain areas. This allows guests to experience a gradual transition between the built environment (Zone 1) and more-natural areas that still contain activities and facilities blending with the area's natural setting (Zone 2). Area 8 abuts two Zone 3's: sharing borders with Area 7 and Area 11 along the western edges. Zone 1 will offer interpretive opportunities in a developed setting, with goals of enhancing guests' understanding of the natural environment as they prepare to venture into less-developed areas.

### **Compatible Activities and Facilities**

Services and activities in Zone 1 include food and beverage operations, parking, shelter and emergency services, restroom facilities, landscaped areas, and other activities. At A-Basin, in addition to the Zone 1 within the base area, Zone 1 serves as the on-mountain hub, from which guests will access surrounding activities and refuel between activities. Typically, guests will first access these areas via the base area or after riding the Black Mountain Express chairlift; however, guests could also access Zone 1 under their own power from the surrounding, limited trail network. A-Basin currently hosts minimal multi-season recreational activities, including weddings and events at the Black Mountain Lodge, and hiking, mountain biking, and other leisurely summer recreational activities. These activities are intended to expose guests to summer recreational opportunities on NFS lands.

Activities on NFS lands within Zone 1 may include challenge courses; canopy tours; zip lines; singletrack, flow, and larger, more developed mountain biking trails; a mountain biking skills park; hiking trails; climbing walls; more developed pathway systems; equestrian trails and facilities; and other natural resource-based recreation activities. In summary, activities appropriate in Zone 1 would rely more heavily on lift-service and guest services, and they would be activities that concentrate people resulting in a diminished sense of remoteness. The activities would not compromise the existing skiing which occurs in Zone 1 during winter months.

#### **b) Zone 2**

### **Setting**

The setting of Zone 2 is less disturbed when compared with Zone 1 and provides more naturalness due to a lesser degree of disturbance from the surrounding ski area. The setting of Zone 2 contains areas of disturbance from ski trail and chairlift development, but guests can still find some degree of remoteness and naturalness depending on their location within the zone.

Within the context of the overall SUP area, the following summarizes the setting in Zone 2:

- Road access and roads are present;
- Human activity (people recreating) occurs within and proximate to this setting—there is little feeling of remoteness;
- Terrain modifications (ground disturbance and vegetation removal) are evident in the area, but past disturbance blends with the landscape; and
- Infrastructure, including chairlifts and buildings, are present.

Two areas within A-Basin's SUP area were designated as Zone 2: Areas 9 and 13 where summer trails, roads, chairlift and other resort infrastructure presently exists. These areas are also the middle portion of the ski area, which is heavily developed.

### **Desired Experiences**

Most guests will access Zone 2 from Zone 1, from surrounding Areas 9 and 13. In moving between these zones, guests will transition from the built environment to a setting characterized by both developed and passive activities proximate to existing infrastructure and facilities, but still offering a more natural feel. For some guests of A-Basin, this may be their first real experience in the mountains, and providing a safe, comfortable environment for exploration is critical to the success of Zone 2 and the overall program of activities and experiences. Zone 2 provides the initial opportunity for guests to learn about and engage in their natural surroundings through hands-on recreational, interpretive, and educational offerings. Zone 2 serves as a buffer between higher levels of development within Zone 1 and on private lands, and the more natural settings of Zones 3 and 4.

### **Compatible Activities and Facilities**

Passive activities within Zone 2 include educational/interpretive opportunities, sightseeing, and light hiking. Zone 2 will provide enhanced sightseeing opportunities when compared to Zone 1. Potential activity offerings include zip lines; canopy tours; interpretative opportunities; extended hiking trails; singletrack and developed mountain biking trails; and other natural resource-based activities. A-Basin's clientele expects to be challenged, and the activities within Zone 2 would be planned to meet that challenge.

As mentioned above, Zone 2 serves two primary purposes: to provide activities in a natural setting in proximity to existing infrastructure and services, and to provide a buffer between Zones 3 and 4 and more developed areas within Zone 1 and on private lands. Thus, areas within Zone 2 serve as transitional zones, encouraging guest exploration into more natural portions of the National Forest in a setting that still feels comfortable for less-experienced Forest users. The setting of Zone 2 and the activities that occur within will offer sufficient challenge for first-time guests, and will prepare others to venture into the less developed areas of Zones 3 and 4. Overall, developed activities requiring infrastructure are appropriate within Zone 2, but would entail a lesser concentration of guests compared to Zone 1.



### c) Zone 3

#### **Setting**

Generally speaking, Zone 3 includes areas where existing chairlifts are present; however, this was not the determining factor for the designation. Within the context of the overall SUP area, the following summarizes the setting in Zone 3:

- Road access and roads are present, but limited to certain areas;
- Human activity (people recreating) can be seen at a distance or is out of sight from within this setting—a stronger feeling of remoteness is present;
- The area is moderately disturbed by ski area activity, including vegetation removal from ski trail development and some ground disturbance; and
- Infrastructure, including chairlifts and buildings, are present.

Four areas within the SUP area were designated as Zone 3: Areas 3, 7, 11, and 12. Not all of the areas which received a Zone 3 designation are equal in characteristics. For example, Area 3 is less accessible and includes a higher degree of remoteness when compared to Area 12; however, both locations scored in the range to be characterized as Zone 3. Area 7 parallels Highway 6, which alters the accessibility, naturalness, and infrastructure characteristics in comparison to the adjacent Area 1. Area 3 hosts a hiking and mountain biking portal for one of the popular trails at A-Basin.

#### **Desired Experiences**

The majority of guests will access Zone 3 via hiking or biking trails leading out of Zone 3 and into Zone 2. This will allow guests to tier their NFS lands experience and exposure as they increase their relation to the four zoning characteristics going from Zone 1 or 2 and into Zone 3. Once in Zone 3, guests will have a variety of opportunities to engage in their surroundings in a more natural and remote environment as their seclusion and distance from resort infrastructure increases.

The desired experience in Zone 3 will be achieved through the activities offered there. Guests will enjoy nature hikes with interpretive signage that will provide education on their biological, cultural, and historical surroundings. Guests would hike or mountain bike to locations with views of adjacent and distant mountain bowls and terrain. Opportunities for self-guided tours, or dispersed travel also exist. Mountain biking trails would be less developed than cross-country oriented trails and the trail network would be less dense compared to Zone 2.

#### **Compatible Activities and Facilities**

Activities include single-track mountain biking trails; scenic chairlift rides; hiking trails; and other similar natural resource-based activities. Activities within Zone 3 will not require substantial modifications to natural topography to facilitate construction and will require limited infrastructure to support the activity. Existing ski area development (ski trails and chairlifts) exist to varying degrees within Zone 3, and potential seasonal and year-round facilities and activities will be consistent with the level of existing development for the ski area operation.

### d) Zone 4

#### **Setting**

The setting of Zone 4 is more remote and provides a great degree of naturalness. Ski area development is limited and, where ski trails are present, larger tree islands prevail. Within the context of the overall SUP area, the following summarizes the setting in Zone 4:

- Little to no road access occurs;
- Human activity (people recreating and/or resort operations) is distant or out of sight facilitating a high degree remoteness;
- The area is completely natural or has limited disturbance; and
- Infrastructure, including a chairlift and small buildings, are present.

Three areas within the A-Basin SUP area were designated as Zone 4: Areas 2, 5, and 14. Areas 5 and 14 (the Beavers and Montezuma Bowl) include ski trails and glading, but development is limited and large tree islands are dominant features. Area 2 (East Wall) possesses a strong feeling of remoteness due to the abundance of nature, remoteness, and topography of the steep alpine terrain.

#### **Desired Experiences**

In Zone 4, guests will connect with the more natural setting in a relatively undisturbed environment. Dispersed hiking opportunities will allow guests to experience areas of the National Forest where natural processes are more evident, allowing for educational opportunities that are not available in more developed zones. The setting in Zone 4 will directly affect the guest experience, and maintaining a more remote setting with opportunities for solitude will meet the guests' expectations.

#### **Compatible Activities and Facilities**

Activities will promote the surroundings and inform guests of similar environments throughout the National Forest. Activities include slower-moving actions to match the setting and character, which provide even greater opportunities for environmental education and exposure to unique environments. These activities include hiking trails with signage and interpretation, and single-track mountain biking trails. Activities within Zone 4 will require minimal site modification to maintain the current level of naturalness. In this zone, the low density of guests is expected to maintain the feeling of remoteness. In Zone 4, additional infrastructure would be limited to signage.

### e) Zone 5

Zone 5 is the least developed of all the zones. Three areas within the A-Basin SUP area were classified as Zone 5. Areas 1, 4, and 6 were all classified as Zone 5 due to the minimum characteristics valued in the zones scale system (Access, Remoteness, Naturalness and Infrastructure). All of these areas are on the outskirts of A-Basin's SUP and have minimum to no alteration from their natural environment.

#### **Setting**

The setting in Zone 5 is undisturbed by ski area activities. Zone 5 includes high alpine environments and large, intact vegetation habitats. Very few people recreate in these areas of the SUP boundary. No ski area

roads or infrastructure are present in Zone 5. Within the context of the overall SUP area, the following summarizes the setting in Zone 5:

- No ski area roads are present;
- Human activity (people recreating and/or resort operations) is predominately out of sight, so one would feel completely remote;
- Area is undisturbed by ski area activity; and
- Ski area infrastructure is only visible at a distance.

### **Desired Experiences**

Zone 5 represents the most remote sectors within the SUP and is only accessible by dispersed hiking. The desired experience is remote and more natural. Guests within this zone would not expect to encounter many other guests.

### **Compatible Activities and Facilities**

The areas with the Zone 5 designation would be left as is with no developed seasonal or year-round activities or facilities. Dispersed hiking by the public occurs and will continue to occur within these areas.