BP Roadside Stew Project
Integrated Resource Timber Contract Area Map

Fremont-Winema National Forest
Lakeview Ranger District
Lakeview, Oregon

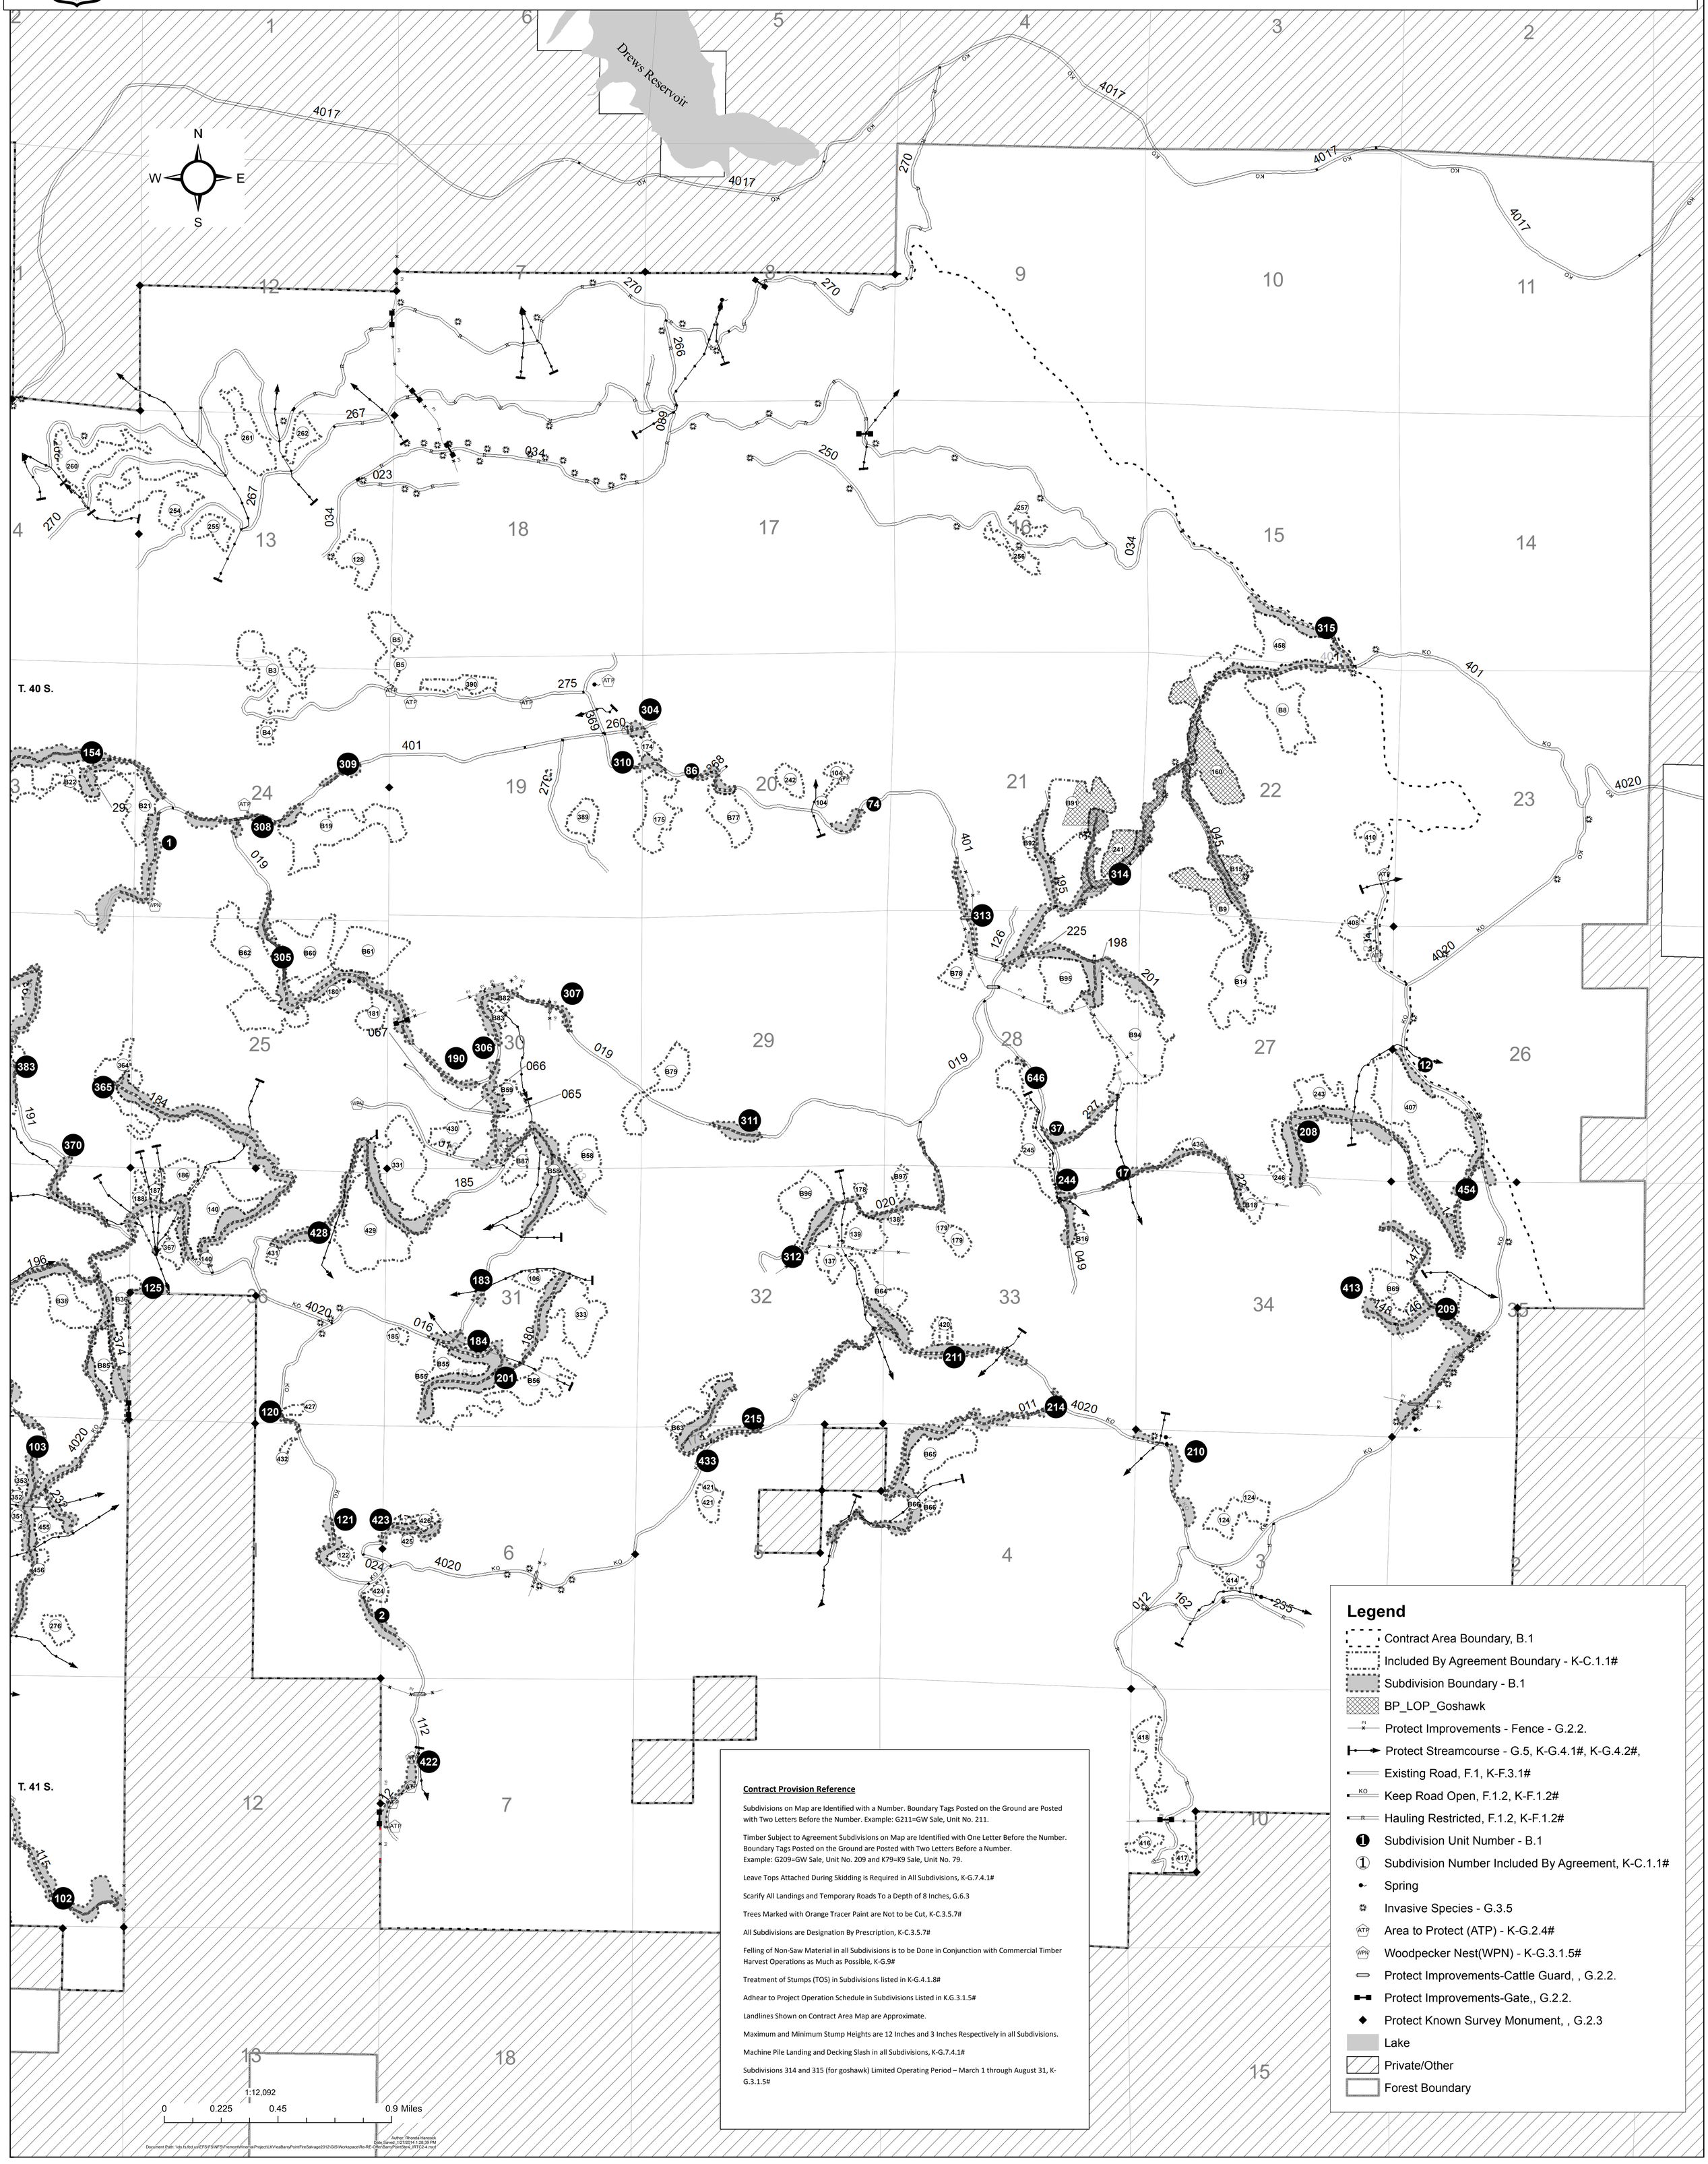

Contract Provision Reference

Subdivisions on Map are Identified with a Number. Boundary Tags Posted on the Ground are Posted with Two Letters Before the Number. Example: G211=GW Sale, Unit No. 211.

Timber Subject to Agreement Subdivisions on Map are Identified with One Letter Before the Number. Boundary Tags Posted on the Ground are Posted with Two Letters Before a Number. Example: G209=GW Sale, Unit No. 209 and K79=K9 Sale, Unit No. 79.

Leave Tops Attached During Skidding is Required in All Subdivisions, K-G.7.4.1#

Scarify All Landings and Temporary Roads To a Depth of 8 Inches, G.6.3

Trees Marked with Orange Tracer Paint are Not to be Cut, K-C.3.5.7#

All Subdivisions are Designation By Prescription, K-C.3.5.7#

Felling of Non-Saw Material in all Subdivisions is to be Done in Conjunction with Commercial Timber Harvest Operations as Much as Possible, K-G.9#

Treatment of Stumps (TOS) in Subdivisions listed in K-G.4.1.8#

Adhear to Project Operation Schedule in Subdivisions Listed in K.G.3.1.5#

Landlines Shown on Contract Area Map are Approximate.

Maximum and Minimum Stump Heights are 12 Inches and 3 Inches Respectively in all Subdivisions.

Machine Pile Landing and Decking Slash in all Subdivisions, K-G.7.4.1#

Subdivisions 314 and 315 (for goshawk) Limited Operating Period – March 1 through August 31, K-G.3.1.5#